FINAL REPORT

UPDATED CITYWIDE PAVEMENT MANAGEMENT PLAN OC Go

2026-2033



Submitted to:

City of Fullerton, CA
April 30, 2026

BUCKNAM
INFRASTRUCTURE GROUP INC

April 30, 2026

Mr. David Grantham, P.E.
Public Works / Engineering
CITY OF FULLERTON
303 W. Commonwealth Avenue
Fullerton, CA 92832

Subject: City of Fullerton – OCTA Pavement Management Compliance Report 2026

Dear David:

As part of the 2026 Update of the Pavement Management Plan (PMP) for the City of Fullerton, *Bucknam Infrastructure Group, Inc.* is pleased to submit the PMP reporting required by the Orange County Transportation Authority (OCTA). This data/report will be submitted to OCTA as part of the City's required biennial PMP prior to June 30, 2026.

The information contained in this report was used to develop the recommended improvement program for the pavement network. The report covers the following categories:

- **Pavement Management Plan Certification**

- **Pavement Management Plan that includes the following:**

    - **Average Pavement Conditions For Each Segment in the Network (PCI Report)**
      The Pavement Condition Index report shows the present condition of each street in the pavement network (MPAH and Locals). In addition, the report shows the basic geometry of each street segment.

    - **Seven-year Projected PCI Under Existing Funding Levels**
      This report identifies the projected PCI's based on the local agencies current funding programs. This report details the PCI projects for the entire network, MPAH roadways and Local streets.

    - **Seven-year Plan for Road Maintenance and Rehabilitation - Forecast Maintenance & Rehabilitation (FMR) Report**
      The FMR Report projects the street maintenance activities required for the next seven years, broken down to show maintenance levels for recommended streets. This includes all scheduled projects provided by the City for fiscal years 2026 through 2033.

    - **Alternative Funding Levels**
      OCTA has requested two reports indicating the necessary funding to maintain the City's current weighted average PCI as well as the necessary funding to improve the weighted average PCI by one PCI point over the next seven years.

    - **Backlog by Fiscal Year (re: unfunded restoration, rehabilitation and reconstruction)**

- **Percentage of total network in each of the five condition categories based on centerline mileage**

- **Local Match Reduction Reporting**

    - In order to be eligible for Local Match Reduction of 10%, the following must be submitted:
        - Measurable improvement of paved road conditions during the previous reporting period defined as an overall weighted (by area) average system improvement of one PCI point.
        - No reduction in the overall weighted (by area) average PCI in the MPAH or local street categories

        - or –

        - Have road pavement conditions, for the overall network, during the previous reporting period within the highest twenty (20%) of the scale for road pavement conditions in conformance with OCTA Ordinance No. 3, defined as a PCI of 75 or higher, otherwise defined as in "good condition".

- **GIS Digital Data**

- **Quality Assurance / Quality Control (QA/QC) Plan**

- **Pavement Management Data Files (electronic Fullerton.e70 file format)**

- **GIS Maps / Current Conditions**

These reports will be submitted to the City of Fullerton as part of the biennial Pavement Management Plan that is due prior to June 30, 2026. These reports will be packaged in a way that it will be easy for staff to review.

All comments received from the City have been incorporated in the reports that follow. It has been a pleasure working with you and the City on updating your Pavement Management Plan. We look forward to the continued success of this project and future teamwork with City staff.

Sincerely,

Bucknam Infrastructure Group, Inc.



Peter J. Bucknam
Project Manager
Infrastructure Management – GIS Services

BUCKNAM
INFRASTRUCTURE GROUP, INC
3548 Seagate Way, Suite 230
Oceanside, CA 92056
T: (760) 216-6529
www.bucknam-inc.com

AGENCY SUBMITTAL TABLE OF CONTENTS

I. Pavement Management Plan Certification 2

II. Executive Summary 3

III. Background (City of Fullerton) 4

IV. Current Pavement Conditions (PCI) 7

V. Projected Pavement Conditions (PCI) 8

VI. Alternative Funding Levels 9
- a. Maintain Existing Average Network PCI 9
- b. Improve Average Network PCI 9

VII. Current and Projected Backlog by Year of Pavement Maintenance Needs 9

VIII. Centerline Mileage 10

IX. Percentage of Network in Each of Five Condition Categories Based on Centerline mileage 10

X. Reduction in M2 Local Match 11

XI. Appendix A – Seven-Year Road Maintenance and Rehabilitation Plan Based on Current or Expected Funding Level 12

XII. Appendix B – Complete Street Listing Current Conditions 13

XIII. Appendix C – GIS Digital Data 14

XIV. Appendix D – Quality Assurance / Quality Control Plan 15
- Introduction 15
- Objectives 15
- Structure of QA/QC Plan 16
- Condition Survey Procedures 16
- Accuracy Required for Data Collection 17
- Random and Systematic Re-Inspections 17
- PCI Comparison with Past Surveys 18
- Inspector Qualifications and Experience 18
- Safety Procedures 19

XV. Appendix E – Pavement Management Data Files 20

XVI. Appendix F – GIS Maps – Current Conditions 21



CITY OF FULLERTON PAVEMENT MANAGEMENT PLAN

- part of -

COUNTYWIDE PAVEMENT MANAGEMENT PLAN GUIDELINES

(OCTA Guideline – April 2026)

Prepared by: Bucknam Infrastructure Group, Inc.
Submitted to OCTA: June 30, 2026

I. Pavement Management Plan Certification

The City of Fullerton, CA certifies that it has a Pavement Management Plan in conformance with the criteria stated in the Orange County Transportation Authority Ordinance No. 3. This ordinance requires that a Pavement Management Plan be in place and maintained to qualify for allocation of revenues generated from renewed Measure M (M2).


The plan was developed by Bucknam Infrastructure Group, Inc. using MicroPAVER, a pavement management system conforming to American Society for Testing and Materials (ASTM) Standard D6433, and contains, at a minimum, the following elements:

- Inventory of MPAH and Local routes reviewed and updated biennially. The last update of the inventory was completed on April, 2026 for the Arterial (MPAH) and April, 2025 for portion of the Local streets;
- Assessment of the pavement condition for all routes in the system, updated biennially. The last field review of the pavement condition was completed in April, 2026;
- Percentage of all sections of pavement needing:
  - Preventive Maintenance = 11.6%;
  - Rehabilitation = 28.2%;
  - Reconstruction = 23.1%
- Budget needs for preventive maintenance, rehabilitation and/or reconstruction of deficient sections of pavement for:
  - Current biennial period $22,267,100;
  - Following biennial period $22,213,200
- Funds budgeted or available for Preventive Maintenance, Rehabilitation and/or Reconstruction.
  - Current biennial period $19,900,000;
  - Following biennial period $20,400,000
- Backlog by year of unfunded rehabilitation, restoration and reconstruction needs (See page 9);
- The Pavement Management Plan is consistent with countywide pavement condition assessment standards as described in the OCTA Countywide Pavement Management Plan Guidelines adopted by the OCTA Board of Directors.

*An electronic copy of the Pavement Management Plan (with MicroPAVER or StreetSaver compatible files) has been or will be submitted with the certification statement. A copy of this certification is being provided to the Orange County Transportation Authority.

Submitted by:

Stephen Bise
Name (Print)


Signed

Public Works Director
Title

City of Fullerton
Jurisdiction

06/08/2026
Date

II. EXECUTIVE SUMMARY

2026 UPDATE OF PAVEMENT MANAGEMENT PLAN (PMP)

As the City of Fullerton's infrastructure continues to mature Public Works priorities such as Local street maintenance and Arterial rehabilitation are key projects to City staff. With the City mostly built-out, wear and tear on the infrastructure will occur at an ever increasing rate. Pavement aging through annual weathering, dynamic and static vehicle loading, and increased usage, compounded with the increased cost of performing maintenance and rehabilitation, add to the yearly operational budget of the pavement network. System sustainability can only be achieved through proactive scheduling and the implementation of cost-efficient pavement applications.

In the upcoming years as the City continues to build upon this study through future inspections and maintenance work history, Fullerton pavement data will continue to provide reliable data. This will enhance the PMP through detailed Orange County Transportation Authority (OCTA) OC Go funding analysis, City specific budgetary reporting and level of service reporting.

The Fullerton PMP has been developed to assist City personnel by providing current data on the City's street network and to develop cost-effective maintenance strategies to maintain a desirable level of pavement performance on a network scale, while optimizing the expenditure of limited fiscal resources. The project consisted of analyzing the City's 2025 dataset for quality and usability. In doing this, we were tasked to generate an updated Capital Improvement Program report that identified recommendations and deficiencies in the current operating and maintenance efforts put forth by the City.

We surveyed all designated arterial, collector (MPAH) routes this past winter/spring to assist the City in being compliant with OCTA – OC Go April 2026 guidelines. Additionally, we updated the City's unique Pavement Management – GIS layer that will continue to assist the City in analyzing pavement conditions and other attribute information through the use of MyRoads® and ESRI ArcGIS.

Bucknam Infrastructure Group reviewed the City's previous maintenance efforts and the current 2026-27 proposed street improvements for pertinent pavement information in order to generate a CIP report that identified recommendations and opportunities for improvement in the current operating and maintenance efforts put forth by the City. The result of these work efforts is this report.



III. BACKGROUND (CITY OF FULLERTON)

In late 1990, voters throughout Orange County approved a ½-cent sales tax for transportation improvements known as OC Go, formerly known as Measure M2. Funding for streets and roads are included within the sales tax and are distributed to locals agencies through both formula and a competitive method. In late 2006, the renewal of OC Go was approved by voters that would continue the ½-cent sales tax for thirty additional years, starting in 2011.

The primary of goal of this report is to comply with established guidelines from OCTA to ensure that field data collection and reporting efforts performed by outside consultants or local agency staff are consistent. This is required in order that funding allocations can be reviewed and based on agency comparable pavement conditions. Specifically, our findings and recommendations provide Public Works administrators, managers and field personnel with:

- PMP reports consistent with OCTA OC Go guidelines
- the present condition status of the pavement network (arterial, collector, residential and industrial streets), as a whole and of any grouping or individual component within the City;
- a ranked list of all streets, or segments of streets, by condition within the network;
- rehabilitation/maintenance needs of each street segment by year;
- an optimized priority maintenance and rehabilitation program based on cost/benefit analysis and various levels of funding;
- optimum annual pavement expenditure levels for pavement maintenance for the next seven (7) years;
- prediction of the life-cycle performance of the City's pavement network and each individual street section; and
- pavement condition data and analysis presented in GIS through MyRoads® and ESRI ArcGIS

Pavement is a dynamic structure where deterioration is constantly occurring; thus the pavement management system needs to be updated on a regular basis to reflect these changes in pavement conditions, pavement maintenance histories, and maintenance strategies based upon budgetary constraints. In our approach to develop the City's forecasted maintenance recommendations we worked with Fullerton Public Works/Engineering staff in identifying unit costs for all maintenance practices used on an annual basis. Currently, based upon the City's maintenance practices and their associated unit costs, the total replacement value of the Fullerton pavement network is $713,847,000. This value clearly indicates that the City's pavement network is the most valuable and essential asset to Fullerton. The City's use of slurry seal, AC Overlay and R&R practices are typically applied at a 5-year, 10-year and 25-year frequency respectively subject to funding availability. These frequencies are preferred but if not implemented the City may see increases in deterioration rates due to environmental, load and high average daily traffic (ADT) volumes. For example, high ADT volumes along one of Fullerton's arterial streets will increase deterioration rates for a previously applied AC Overlay compared to a small local street. These deterioration rates are monitored through frequent inspections and functional class deterioration analysis within the City's PMP database.



FINDINGS AND RECOMMENDATIONS

Through our assessment of historical maintenance performed within the City as well as the conditional data found across the network clearly shows that more proactive and creative funding mechanisms need to occur on the Fullerton PMP network. Pavement management involves frequent preventative maintenance; as pavement deteriorates through heavy traffic impacts, weathering and time, preventative maintenances (such as slurry seal, stop gap, etc.) have limited benefits. More aggressive maintenance applications have to be used.

Our study has shown, at a minimum, that key overlay projects will be needed immediately over the next several years to maintain the network's level of condition. Currently, the City's two major streets networks (Arterial & Local) hold below average weighted PCI values; it is our recommendation that a proactive, common sense overlay program and a continued slurry seal program be scheduled over the next several fiscal years. This will ensure that the citywide weighted PCI will sustain itself and allow for routine slurry seal maintenance to continue. We have found and recommend the following detailed items which should be reviewed and considered for a proactive approach to the future management of the PMP:

ARTERIAL / COLLECTOR (MPAH) FINDINGS AND RECOMMENDATIONS

The actual workload requirements identified indicate that the Arterial (MPAH) street network is currently in "fair" condition. To maintain this condition, it is critical that preventive maintenance and overlay activities are funded at the levels identified on page 9 to maintain a "fair" network weighted average PCI value. Our MPAH findings for conditional data and recommendations for revenue expenditures are shown below:

- The MPAH network has a weighted PCI of 69.6
- The MPAH network consists of 68.4 centerline miles and 22,545,890 SF of pavement;
- Currently, 29% of the MPAH network (19.5 centerline miles) qualify for slurry seal/stop gap maintenance; 48% of the Arterial network (32.8 centerline miles) qualify for rehabilitation/reconstruction maintenance;
- At a minimum, MPAH maintenance projects should focus on the maintaining the current PCI above a weighted average of 70 over the next 7 years;
    - Maintain Arterial PCI by providing revenues at the $3,990,100/yr level for the term of the CIP to generate the projects identified on page 9 (Maintain Budget);
- Increase funding and develop a proactive approach to identify MPAH overlay projects based on the deterioration modeling within MicroPAVER;
    - Increasing annual funding levels will improve the MPAH weighted PCI of 69.6 to 71.3 and reduce the citywide backlog of $132.5 million to $125.4 million over the next seven years (Increase PCI Budget);

- Perform pavement inspections on the MPAH network every two years to continue the City's solid planning model within MicroPAVER to track PCI deterioration; also follows new OCTA guidelines for Measure M2.

LOCAL FINDINGS AND RECOMMENDATIONS

The actual workload requirements identified indicate that the Local street network is currently in "fair" condition. To maintain this condition, it is critical that preventive maintenance and overlay activities are funded at the levels identified on page 9 to maintain a "fair" network weighted average PCI value. Our Local network findings for conditional data and recommendations for revenue expenditures are shown below:

- The Local network has a weighted PCI of 66.8;

- The Local network consists of 229.5 centerline miles and 39,527,764 SF of pavement;

- Currently, 17% of the Local network (38.1 centerline miles) qualifies for slurry seal/stop gap maintenance; 46% of the Local network (105.3 centerline miles) qualify for rehabilitation/reconstruction maintenance;

    - With Local conditions showing approximately 105 miles of streets in need of major rehabilitation or reconstruction a proactive and aggressive Local CIP program needs to be implemented and sustained;

- At a minimum, Local maintenance projects should focus on the maintaining the current PCI above a weighted average of 67 over the next 7 years;

    - Maintain Local PCI by providing revenues at the $7,410,200 Million/yr level for the term of the CIP to generate the projects identified on page 9 (Maintain Budget);


- Increase funding and develop a proactive approach to identify Local overlay projects based on the deterioration modeling within MicroPAVER;

    - Increasing annual funding levels will improve the Local weighted PCI of 66.8 to 68.0 and reduce the citywide backlog of $132.5 million to $125.4 million over the next seven years (Increase PCI Budget);

- Perform pavement inspections on the Local network every year (following the City's maintenance zone schedule) to continue the City's solid planning model within MicroPAVER to track PCI deterioration; also follows new OCTA guidelines for Measure M2.

IV. CURRENT PAVEMENT CONDITIONS (PCI)


Rank	Mileage	SF	2026 PCI	2025 PCI	2024 PCI	2022 PCI	2020 PCI	2018 PCI	2016 PCI	2013 PCI	2011 PCI
MPAH	68.4	22,545,890	69.6	74.6	74.6	74.5	68.1	69.4	65.6	65.0	64.2
Locals	229.5	39,527,764	66.8	65.3	65.6	62.8	60.7	61.8	59.2	62.0	61.3
Citywide	297.9	62,073,654	67.8	68.7	68.9	67.1	63.5	64.7	61.6	63.0	62.3

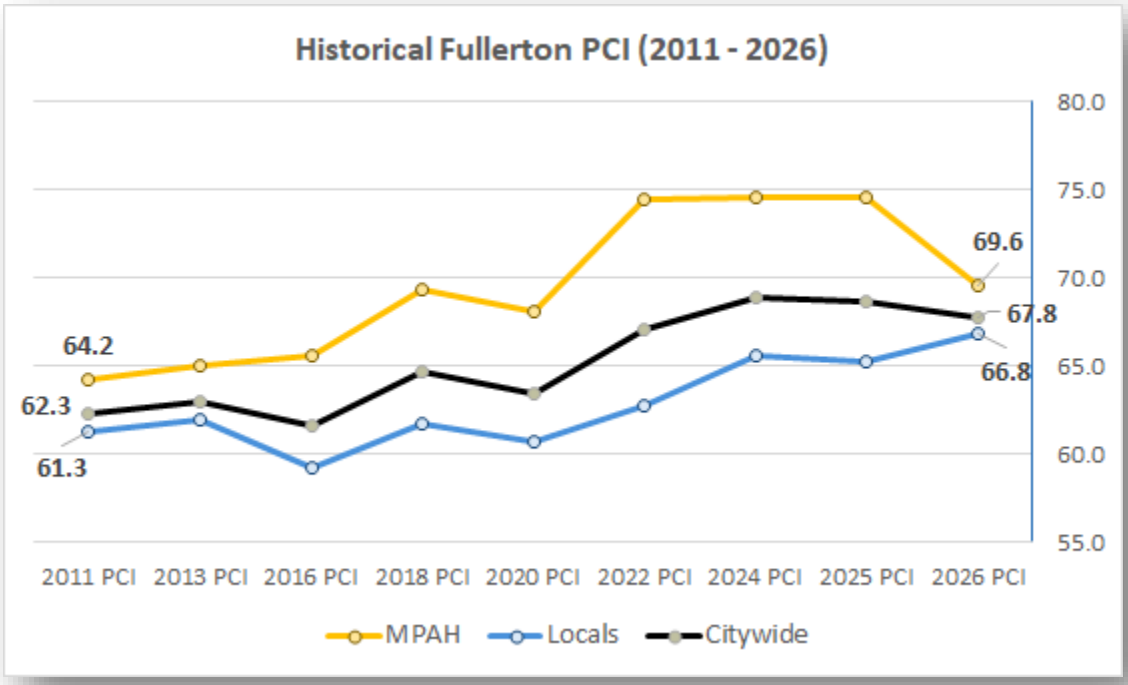

Condition	PCI Range	MPAH	Local	Total	% of Network
Very Good	86-100	16.1	94.4	110.5	37.1%
Good	75-85	9.5	25.2	34.7	11.6%
Fair	60-74	21.7	24.0	45.7	15.3%
Poor	41-59	17.0	21.3	38.3	12.9%
Very Poor	0-40	4.1	64.6	68.7	23.1%
		68.4	229.5	297.9	

V. PROJECTED PAVEMENT CONDITIONS (PCI)

Fiscal Year	Current Funding	Network PCI	MPAH PCI	Local PCI
Today	~	**67.8**	**69.6**	**66.8**
2026-27	$9,700,000	68.3	70.4	67.4
2027-28	$10,200,000	67.5	69.6	66.4
2028-29	$10,200,000	66.2	68.4	65.2
2029-30	$10,200,000	66.9	68.7	66.4
2030-31	$10,200,000	66.4	68.3	66.0
2031-32	$10,200,000	65.2	67.2	64.9
2032-33	$10,200,000	65.0	67.1	64.7
Total	$70,900,000			

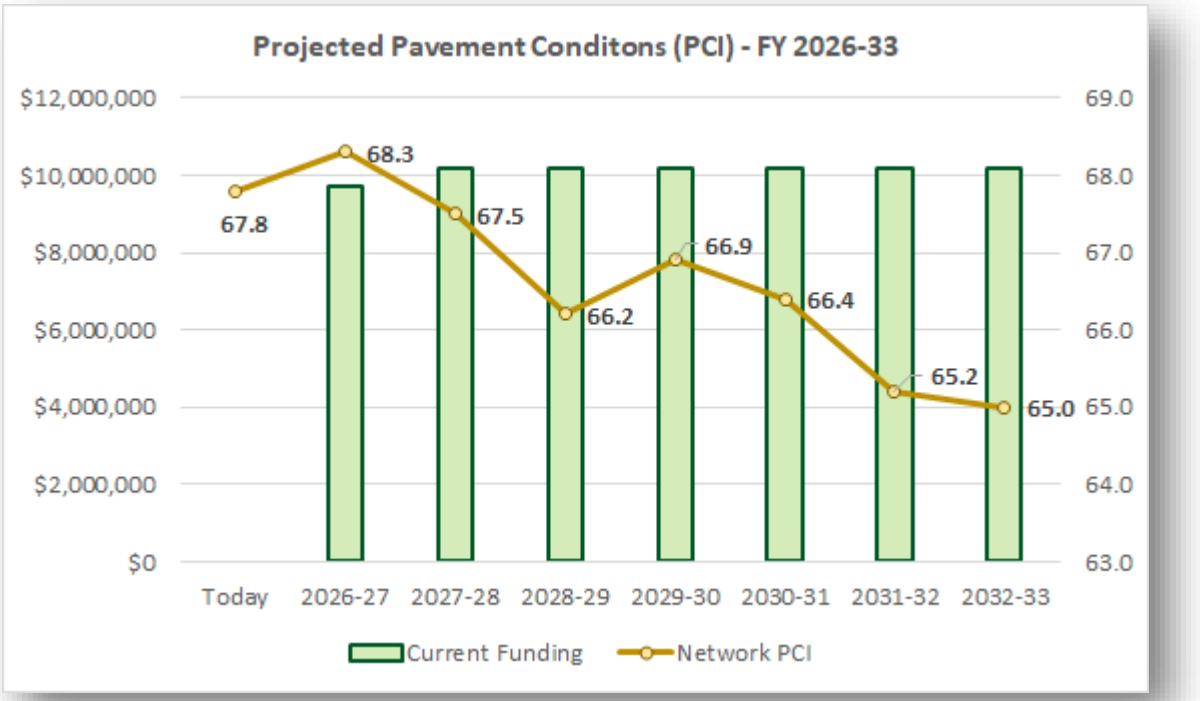

VI. ALTERNATIVE FUNDING LEVELS

Maintain Existing Average Network PCI

Fiscal Year	Maintain PCI Funding	Network PCI	MPAH PCI	Local PCI
Today	**~**	**67.8**	**69.6**	**66.8**
2026-27	$11,216,500	68.7	70.9	68.8
2027-28	$11,050,600	69.3	72.4	69.4
2028-29	$10,864,200	70.0	73.0	69.9
2029-30	$11,349,000	70.8	73.6	70.6
2030-31	$11,516,000	71.0	73.6	70.7
2031-32	$11,800,400	69.1	71.9	69.3
2032-33	$12,005,300	68.1	70.2	67.2
Total	**$79,802,000**			

Funding an additional $8.9 million over seven years sustains the PCI at 68.

Improve Average Network PCI

Fiscal Year	Increase PCI Funding	Network PCI	MPAH PCI	Local PCI
Today	**~**	**67.8**	**69.6**	**66.8**
2026-27	$11,216,500	68.7	70.9	68.8
2027-28	$11,050,600	69.3	72.4	69.4
2028-29	$10,864,200	69.9	73.0	69.9
2029-30	$11,349,000	70.7	73.6	70.6
2030-31	$11,516,000	70.9	73.6	70.7
2031-32	$12,465,900	69.7	72.7	69.7
2032-33	$13,811,500	69.4	71.3	68.0
Total	**$82,273,700**			

Funding an additional $11.4 million over seven years increases the PCI by two (2) points.

VII. CURRENT AND PROJECTED BACKLOG BY YEAR OF PAVEMENT MAINTENANCE NEEDS

DEFERRED MAINTENANCE

Delaying repairs on streets where pavement conditions indicate a need generates deferred maintenance or "backlog". Deferred maintenance is work that is postponed to a future budget cycle, or until funds are available. As maintenance is deferred, the opportunity to apply preventive, life extending pavement treatments is forfeited and the ultimate cost of rehabilitation multiplies (i.e. slurry seal costs to overlay costs). By using the City's pavement maintenance applications and their associated unit costs, when a budgetary model is exercised within the PMP software the amount of deferred maintenance is calculated. Based upon the available budget applied to the model, deferred maintenance will increase or decrease.

As maintenance is deferred, the opportunity to apply life extending preventive pavement applications is lost and the ultimate cost of rehabilitation multiplies.

In the case of Fullerton, the City's current annual funding through FY 2032-33 will continue to generate an increase in the amount of deferred maintenance on the network to $209.4 million level by FY 2033.

Fiscal Year	Current Funding Backlog	Maintain Funding Backlog	Increase PCI Backlog
Current	$132,488,200	$132,488,200	$132,488,200
2026-27	$149,881,100	$132,026,400	$132,026,400
2027-28	$158,059,500	$132,529,200	$132,529,200
2028-29	$156,521,200	$133,077,400	$133,077,400
2029-30	$164,876,000	$132,989,200	$132,989,200
2030-31	$174,598,000	$133,766,100	$133,766,100
2031-32	$191,249,600	$136,908,900	$134,717,900
2032-33	$209,453,300	$138,542,500	$125,416,500

VIII. CENTERLINE MILEAGE

Rank	Mileage	SF	2026 PCI
MPAH	68.4	22,545,890	69.6
Locals	229.5	39,527,764	66.8
Citywide	297.9	62,073,654	67.8

IX. PERCENTAGE OF NETWORK IN EACH OF FIVE CONDITION CATEGORIES BASED ON CENTERLINE MILES

Condition	PCI Range	Network	Percent Area of Total Pavement	Area of Pavement (SF)	Percent Centerline Mi. of Network	Centerline Mileage of Network
Very Good	(86-100)	MPAH	8.7%	5,372,591	5.4%	16.1
		Local	26.3%	16,315,024	31.7%	94.4
Good	(75-85)	MPAH	4.8%	2,963,652	3.2%	9.5
		Local	7.1%	4,423,511	8.5%	25.2
Fair	(60-74)	MPAH	12.0%	7,438,167	7.3%	21.7
		Local	6.8%	4,224,916	8.1%	24.0
Poor	(41-59)	MPAH	8.7%	5,422,907	5.7%	17.0
		Local	5.9%	3,653,574	7.2%	21.3
Very Poor	(0-40)	MPAH	2.2%	1,348,573	1.4%	4.1
		Local	17.6%	10,910,739	21.7%	64.6
				62,073,654		297.9

X. REDUCTION IN M2 LOCAL MATCH

A local agency match reduction of 10% of the eligible cost for projects submitted for consideration of funding through the M2 Comprehensive Transportation Funding Programs (CTFP) call for projects is available if the local agency either:

a. Shows measurable improvement of paved road conditions during the previous reporting period defined as an overall weighted (by area) average system improvement of one Pavement Condition Index (PCI) point with no reduction in the overall weighted (by area) average PCI in the Master Plan of Arterial Highways (MPAH) or local categories:

or

b. Have road pavement conditions during the previous reporting period, within the highest 20% of the scale for road pavement conditions in conformance with OCTA Ordinance No. 3, defined as a PCI of 75 or higher, otherwise defined as in "good condition".

Road conditions found through our 2026 PMP management study shows that the City is not eligible for Local Match Reduction based on the current network weighted PCI of 67.8 (previous 2024 PCI was 68.7).

XI. APPENDIX A – SEVEN YEAR ROAD MAINTENANCE AND REHABILITATION PLAN BASED ON CURRENT OR EXPECTED FUNDING LEVEL

FY	BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Recommendations	Total $
			Arterials / Collectors (MPAH)															
2026-27	ACACIA	3770	ACACIA AVE	CHAPMAN AVE	WILSHIRE AVE	B	4	AC	3	553	60	33,180	35	35	53	12	Grind - ARHM	$215,338
2026-27	ACACIA	3780	ACACIA AVE	WILSHIRE AVE	COMMONWEALTH AVE	B	4	AC	4	738	60	44,280	29	28	49	23	Grind - ARHM	$287,377
2026-27	ACACIA	3850	ACACIA AVE	ORANGETHORPE AVE	DAWNS WY	B	4	AC	3	876	60	52,560	8	51	29	20	FDR	$568,699
2026-27	ACACIA	3860	ACACIA AVE	DAWNS WY	CARBON CREEK CHANNEL	B	4	AC	3	496	60	29,760	21	51	44	5	FDR	$322,003
2026-27	BASTAR	1800	BASTANCHURY RD	PUENTE ST	BREA BLVD	B	6	AC	5	1,340	34	56,636	40	49	49	2	Grind - ARHM	$367,568
2026-27	BASTAR	50240	BASTANCHURY RD	THREEWOODS LN	BREA BLVD	B	5	AC	5	686	32	30,250	41	32	36	32	Grind - ARHM	$196,323
2026-27	BASTAR	50270	BASTANCHURY RD	FAIRWAY ISLES DR	PVMT CHNGE (1200' E/ BALBOA RD)	B	5	AC	5	1,330	32	42,560	58	48	29	23	Grind - ARHM	$276,214
2026-27	BASTAR	50280	BASTANCHURY RD	PVMT CHNGE (1200' E/ BALBOA RD)	BALBOA RD	B	5	AC	5	1,239	24	30,479	50	12	39	49	Grind - ARHM	$197,809
2026-27	BASTAR	50290	BASTANCHURY RD	BALBOA RD	HARBOR BLVD	B	5	AC	6	210	35	12,645	57	14	39	47	Grind - ARHM	$82,066
2026-27	BASTAR	50300	BASTANCHURY RD	ST JUDE EMPLOYEE ENTERANCE	PVMT CHNGE (600' E/ ST JUDE)	B	5	AC	5	480	30	14,410	29	72	18	10	Grind - ARHM	$93,521
																		$2,606,918
2027-28	CHAPMA	1310	CHAPMAN AVE	WOODS AVE	DRAKE AVE	B	2	AC	4	731	60	43,860	43	71	29	0	Grind - ARHM	$296,055
2027-28	CHAPMA	1330	CHAPMAN AVE	DRAKE AVE	RICHMAN AVE	B	2	AC	4	652	60	39,120	51	72	22	6	Grind - ARHM	$264,060
2027-28	CHAPMA	1340	CHAPMAN AVE	RICHMAN AVE	FORD AVE	B	2	AC	4	668	60	40,080	58	54	43	3	Grind - ARHM	$270,540
2027-28	CHAPMA	1350	CHAPMAN AVE	FORD AVE	HIGHLAND AVE	B	2	AC	4	674	60	40,440	49	74	26	0	Grind - ARHM	$272,970
2027-28	CHAPMA	1360	CHAPMAN AVE	HIGHLAND AVE	MALDEN AVE	B	2	AC	4	662	60	39,720	53	66	33	1	Grind - ARHM	$268,110
2027-28	CHAPMA	1370	CHAPMAN AVE	MALDEN AVE	HARBOR BLVD	B	2	AC	5	675	60	40,500	45	52	29	19	Grind - ARHM	$273,375
2027-28	CHAPMA	1380	CHAPMAN AVE	HARBOR BLVD	POMONA AVE	A	3	AAC	5	672	60	40,320	39	50	23	27	Grind - ARHM	$272,160
2027-28	CHAPMA	1390	CHAPMAN AVE	POMONA AVE	LEMON ST	B	3	AAC	4	686	56	38,416	44	57	30	13	Grind - ARHM	$259,308
2027-28	CHAPMA	1410	CHAPMAN AVE	NEWELL PL	BALCOM AVE	B	3	AAC	5	311	60	18,660	56	32	39	29	Grind - ARHM	$125,955
2027-28	CHAPMA	1420	CHAPMAN AVE	BALCOM AVE	BERKELEY AVE	B	3	AAC	5	389	60	23,340	47	49	51	0	Grind - ARHM	$157,545
																		$2,460,078
2028-29	BASTAR	1810	BASTANCHURY RD	BREA BLVD	THREEWOODS LN	B	5	AC	5	686	32	30,246	58	50	50	0	Grind - ARHM	$212,327
2028-29	BASTAR	1820	BASTANCHURY RD	THREEWOODS LN	PAYNE STEWART DR	B	5	AC	5	538	32	26,877	62	57	43	0	Grind - ARHM	$188,677
2028-29	BASTAR	1830	BASTANCHURY RD	PAYNE STEWART DR	ASHWOOD CIR	B	5	AC	5	1,085	33	42,993	62	20	60	20	Grind - ARHM	$301,811
2028-29	BASTAR	1880	BASTANCHURY RD	HILLTOP CT	MOUNTAIN RIDGE DR	B	5	AC	4	950	80	76,000	66	14	86	0	Grind - ARHM	$533,520
2028-29	BASTAR	1910	BASTANCHURY RD	ASSOCIATED RD	DEREK DR	B	5	AAC	4	1,300	60	78,000	53	8	92	0	Grind - ARHM	$547,560
2028-29	BASTAR	1920	BASTANCHURY RD	DEREK DR	HARTFORD AVE	B	4	AAC	4	1,850	60	111,000	54	0	100	0	Grind - ARHM	$779,220
2028-29	BASTAR	1930	BASTANCHURY RD	HARTFORD AVE	CAMBRIDGE AVE	B	4	AAC	5	269	80	21,520	56	0	100	0	Grind - ARHM	$151,070
2028-29	BASTAR	1940	BASTANCHURY RD	CAMBRIDGE AVE	GILMAN CIR	B	4	AAC	5	307	80	24,560	52	0	100	0	Grind - ARHM	$172,411
																		$2,886,596
2029-30	BERKEA	3540	BERKELEY AVE	HARBOR BLVD	LEMON ST	B	3	AC	4	1,343	60	80,580	66	19	80	1	Grind - ARHM	$588,234
2029-30	BERKEA	3550	BERKELEY AVE	LEMON ST	HORNET WY	B	3	AC	3	1,435	60	86,100	67	10	57	33	Grind - ARHM	$628,530
2029-30	BERKEA	3570	BERKELEY AVE	BROOKDALE PL	CHAPMAN AVE	B	3	AC	3	975	60	58,500	62	21	79	0	Grind - ARHM	$427,050
2029-30	BRADFA	4500	BRADFORD AVE	PALM DR	YORBA LINDA BLVD	B	4	AC	2	478	36	17,208	44	0	100	0	Grind - ARHM	$125,618
2029-30	RAYMOA	3690	RAYMOND AVE	ELM ST	KIMBERLY AVE	B	3	AC	5	375	60	22,500	41	37	24	39	Grind - ARHM	$164,250
2029-30	RAYMOA	3730	RAYMOND AVE	ORANGETHORPE AVE	BURTON ST	B	3	AC	5	1,592	60	95,520	28	47	18	35	Grind - ARHM	$697,296
																		$2,630,978
2030-31	STATCB	4080	STATE COLLEGE BLVD	ROSALIA DR	ROLLING HILLS DR	B	5	AC	5	500	80	40,000	29	53	36	11	Grind - ARHM	$303,600
2030-31	STATCB	4090	STATE COLLEGE BLVD	ROLLING HILLS DR	DELICATA DR	B	5	AC	4	1,153	66	76,098	48	37	48	15	Grind - ARHM	$577,584
2030-31	STATCB	4100	STATE COLLEGE BLVD	DELICATA DR	BASTANCHURY RD	B	5	AC	5	1,038	66	68,508	52	50	35	15	Grind - ARHM	$519,976
2030-31	STATCB	4110	STATE COLLEGE BLVD	BASTANCHURY RD	MOUNTAIN RIDGE DR	B	5	AC	6	970	90	87,300	24	45	39	16	FDR	$1,105,218
2030-31	STATCB	4120	STATE COLLEGE BLVD	MOUNTAIN RIDGE DR	VISTA DEL SOL	B	5	AC	6	1,011	66	66,726	27	59	35	6	FDR	$844,751
2030-31	STATCB	4320	STATE COLLEGE BLVD	CYPRESS WY	ORANGETHORPE AVE	B	4	AC	4	545	60	32,700	60	28	55	17	Grind - ARHM	$248,193
																		$3,599,322
2031-32	VALEND	590	VALENCIA DR	EUCLID ST	WOODS AVE	B	2	AC	3	1,350	60	81,000	43	61	31	8	Grind - ARHM	$639,900
2031-32	VALEND	600	VALENCIA DR	WOODS AVE	RICHMAN AVE	B	2	AC	3	1,360	60	81,600	52	30	57	13	Grind - ARHM	$644,640
2031-32	YORBLB	4450	YORBA LINDA BLVD	ASSOCIATED RD	OXFORD AVE	B	4	AC	6	550	80	44,000	37	69	31	0	Grind - ARHM	$347,600
2031-32	YORBLB	4460	YORBA LINDA BLVD	OXFORD AVE	ORANGE FWY (57)	B	4	AC	6	957	67	64,119	37	49	51	0	Grind - ARHM	$506,540
2031-32	YORBLB	4470	YORBA LINDA BLVD	ORANGE FWY (57)	PLACENTIA AVE	B	4	AC	6	1,845	60	110,700	18	69	31	0	FDR	$1,456,812
																		$3,595,492
2032-33	COMMOA	1030	COMMONWEALTH AVE	MONTAGUE AVE	ANIN AVE	B	3	AC	4	787	60	47,220	38	49	31	20	Grind - ARHM	$387,676
2032-33	COMMOA	1040	COMMONWEALTH AVE	ANIN AVE	HARRINGTON DR	B	3	AC	4	767	60	46,020	27	43	19	38	FDR	$630,014
2032-33	COMMOA	1050	COMMONWEALTH AVE	HARRINGTON DR	ACACIA AVE	B	3	AC	4	293	60	17,580	22	61	27	12	FDR	$240,670
2032-33	COMMOA	1060	COMMONWEALTH AVE	ACACIA AVE	MOUNTAIN VIEW PL	B	4	AC	4	808	60	48,480	63	47	30	23	Grind - ARHM	$398,021
2032-33	COMMOA	1070	COMMONWEALTH AVE	MOUNTAIN VIEW PL	LADERA VISTA DR	B	4	AC	4	658	60	39,480	61	56	44	0	Grind - ARHM	$324,131
2032-33	COMMOA	1080	COMMONWEALTH AVE	LADERA VISTA DR	LILLIE AVE	B	4	AC	4	474	60	28,440	36	66	27	7	Grind - ARHM	$233,492
2032-33	COMMOA	670	COMMONWEALTH AVE	MAGNOLIA AVE	THOMPSON AVE	B	7	AAC	5	449	60	26,940	53	56	35	9	Grind - ARHM	$221,177
2032-33	COMMOA	680	COMMONWEALTH AVE	THOMPSON AVE	PRITCHARD AVE	B	7	AC	5	396	60	23,760	52	58	41	1	Grind - ARHM	$195,070
2032-33	COMMOA	830	COMMONWEALTH AVE	ROOSEVELT AVE	WOODS AVE	B	2	AC	4	1,002	52	52,104	58	23	50	27	Grind - ARHM	$427,774
																		$3,058,025
			Locals															
2026-27	ANNIN	9010	ANNIN AVE	WILSHIRE AVE	COMMONWEALTH AVE	E	3	AC	2	767	32	24,544	84	37	63	0	Type II Slurry Seal	$45,161
2026-27	ASHAVE	10180	ASH AVE	ELM AVE	RAYMOND AVE	E	3	AC	2	1,281	40	51,240	60	0	100	0	Cape Seal	$121,951
2026-27	ASHAVE	10190	ASH AVE	RAYMOND AVE	END	E	3	AC	2	642	32	20,544	62	24	69	7	Cape Seal	$48,895
2026-27	ASHFOR	102010	ASHFORD PL	END	WILSHIRE AVE	E	3	AC	2	408	26	10,608	87	0	100	0	Type II Slurry Seal	$19,519
2026-27	BALCOM	10480	BALCOM AVE	CHAPMAN AVE	WILSHIRE AVE	E	3	AC	2	522	32	16,704	69	34	66	0	Type II Slurry Seal	$30,735
2026-27	BALCOM	10486	BALCOM AVE	WILSHIRE AVE	COMMONWEALTH AVE	E	3	AC	2	688	32	22,016	26	67	33	0	Grind - AC Overlay	$132,096
2026-27	BERKEA	10750	BERKELEY AVE	CHAPMAN AVE	COMMONWEALTH AVE	E	3	AC	2	1,260	32	40,320	37	63	37	0	Grind - AC Overlay	$241,920
2026-27	BURTON	11020	BURTON ST	RAYMOND AVE	MANHATTAN AVE	E	3	AC	2	1,454	32	46,528	84	0	74	26	Type II Slurry Seal	$85,612
2026-27	CORNEL	11930	CORNELL AVE	DOROTHY LN	GLENWOOD AVE	E	3	AC	2	700	32	22,400	84	27	73	0	Type II Slurry Seal	$41,216

FY	BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Recommendations	Total $
2026-27	CORNEL	11955	CORNELL AVE	COMMONWEALTH AVE	WALNUT AVE	E	3	AC	2	700	32	22,400	87	0	100	0	Type II Slurry Seal	$41,216
2026-27	DORTHD	12490	DOROTHY DR	END	HORNET WAY	E	3	AC	2	1,095	32	35,040	49	36	45	19	Grind - AC Overlay	$210,240
2026-27	EDGARP	12620	EDGAR PL	END	GLENWOOD AVE	E	3	AC	2	110	51	5,610	84	0	90	10	Type II Slurry Seal	$10,322
2026-27	ELLISL	12810	ELLIS LN	POMONA AVE	ELLIS PL	E	3	AC	2	481	16	7,696	83	0	73	27	Type II Slurry Seal	$14,161
2026-27	ELLISP	12820	ELLIS PL	HARBOR BLVD	POMONA AVE	E	3	AC	2	600	28	16,800	46	18	48	34	Grind - AC Overlay	$100,800
2026-27	ELMAVE	12900	ELM AVE	END	POMONA AVE	E	3	AC	2	470	32	15,040	78	63	37	0	Type II Slurry Seal	$27,674
2026-27	ELMAVE	12940	ELM AVE	END	RAYMOND AVE	E	3	AC	2	1,180	32	37,760	60	0	100	0	Cape Seal	$89,869
2026-27	FERNDR	13150	FERN DR	HORNET WAY	PRINCETON AVE	E	3	AC	2	670	32	21,440	46	55	40	5	Grind - AC Overlay	$128,640
2026-27	GLNWOD	13640	GLENWOOD AVE	W END	PRINCETON AVE	E	3	AC	2	360	32	14,270	33	82	9	9	Grind - AC Overlay	$85,620
2026-27	GROVE	13830	GROVE PL	HART PL	END	E	3	AC	2	225	32	7,200	73	36	64	0	Type II Slurry Seal	$13,248
2026-27	GROVE	13840	GROVE PL	HARRINGTON DR	MAERTIN LN	E	3	AC	2	1,060	32	33,920	25	92	8	0	Grind - AC Overlay	$203,520
2026-27	HALLAV	14000	HALL AVE	S END	ASH AVE	E	3	AC	2	180	32	5,760	46	91	9	0	Grind - AC Overlay	$34,560
2026-27	HALLAV	14010	HALL AVE	ASH AVE	N END	E	3	AC	2	178	26	4,628	87	0	100	0	Type II Slurry Seal	$8,516
2026-27	HARTPL	14130	HART PL	SUDENE AVE	END	E	3	AC	2	350	27	9,450	85	21	79	0	Type II Slurry Seal	$17,388
2026-27	HORNET	14630	HORNET WAY	DOROTHY LN	BERKELEY AVE	E	3	AC	2	520	32	16,640	72	0	100	0	Type II Slurry Seal	$30,618
2026-27	KMBRLY	15020	KIMBERLY AVE	RAYMOND AVE	ACACIA AVE	E	3	AC	3	2,570	38	97,660	67	21	69	10	Cape Seal	$232,431
2026-27	LWRNCE	15660	LAWRENCE AVE	WILSHIRE AVE	COMMONWEALTH AVE	E	3	AC	2	685	32	21,920	83	48	52	0	Type II Slurry Seal	$40,333
2026-27	LEMONS	15730	LEMON ST	VIRGINIA RD	BERKELEY AVE	E	3	AC	2	1,704	32	54,528	86	29	52	19	Type II Slurry Seal	$100,332
2026-27	LINCOL	15810	LINCOLN AVE	CHAPMAN AVE	COMMONWEALTH AVE	E	3	AC	2	1,250	32	40,000	28	19	75	6	Grind - ARAM - Overlay	$246,800
2026-27	LINCOL	15820	LINCOLN AVE	END	WALNUT AVE	E	3	AC	2	495	32	15,840	86	0	100	0	Type II Slurry Seal	$29,146
2026-27	MANHTN	16240	MANHATTAN AVE	ORANGETHORPE AVE	BURTON ST	E	3	AC	2	1,840	32	58,880	45	31	61	8	Grind - ARAM - Overlay	$363,290
2026-27	NEWLLP	17070	NEWELL PL	CHAPMAN AVE	WILSHIRE AVE	E	3	AC	2	525	26	13,650	22	54	41	5	FDR	$168,305
2026-27	NORMNP	17160	NORMAN PL	FERN DR	GLENWOOD AVE	E	3	AC	2	370	32	11,840	16	85	11	4	FDR	$145,987
2026-27	NORMNP	17170	NORMAN PL	END	NUTWOOD AVE	E	3	AC	2	105	32	4,610	40	55	45	0	Grind - AC Overlay	$27,660
2026-27	NUTWOA	17200	NUTWOOD AVE	RAYMOND AVE	RIEDEL AVE	E	3	AC	2	1,070	32	34,240	61	48	48	4	Grind - AC Overlay	$205,440
2026-27	OAKDLE	17300	OAKDALE AVE	DOROTHY LN	RIVERSIDE DR	E	3	AC	2	1,145	32	36,640	9	87	13	0	FDR	$451,771
2026-27	POMONA	17990	POMONA AVE	TRUSLOW AVE	END	E	3	AC	2	1,497	32	47,904	77	41	59	0	Type II Slurry Seal	$88,143
2026-27	PRNCTN	18110	PRINCETON AVE	FERN DR	GLENWOOD AVE	E	3	AC	2	360	32	11,520	38	51	36	13	Grind - AC Overlay	$69,120
2026-27	PRNCTN	18112	PRINCETON AVE	GLENWOOD AVE	PRINCETON CIR	E	3	AC	2	230	32	7,360	75	33	67	0	Type II Slurry Seal	$13,542
2026-27	PRNCTN	18116	PRINCETON AVE	CHAPMAN AVE	COMMONWEALTH AVE	E	3	AC	2	1,253	32	40,096	36	22	77	1	Grind - ARAM - Overlay	$247,392
2026-27	PRNCTN	18120	PRINCETON AVE	SANTA FE AVE	WALNUT AVE	E	3	AC	2	270	32	8,640	9	89	11	0	FDR	$106,531
2026-27	RAYMOA	18400	RAYMOND AVE	MELODY LN	GLENWOOD AVE	E	3	AC	2	1,326	36	45,230	63	72	27	1	Grind - AC Overlay	$271,380
2026-27	RAYMOA	18405	RAYMOND AVE	GLENWOOD AVE	RIVERSIDE DR	E	3	AC	2	999	32	31,968	66	66	32	2	Grind - AC Overlay	$191,808
2026-27	RAYMOA	18410	RAYMOND AVE	RIVERSIDE DR	CHAPMAN AVE	E	3	AC	2	895	30	30,760	61	67	32	1	Grind - AC Overlay	$184,560
2026-27	RIEDEL	18600	RIEDEL AVE	DOROTHY LN	RIVERSIDE DR	E	3	AC	2	1,535	32	49,120	34	81	12	7	Grind - AC Overlay	$294,720
2026-27	RIVRSD	18612	RIVERSIDE DR	LINDENDALE AVE	FERNDALE AVE	E	3	AC	2	535	36	19,260	84	0	100	0	Type II Slurry Seal	$35,438
2026-27	SALLY	19060	SALLY PL	VALENCIA DR	END	E	3	AC	2	615	38	23,370	9	75	25	0	FDR	$288,152
2026-27	SNTFEA	19230	SANTA FE AVE	HARBOR BLVD	LEMON ST	E	3	AC	2	1,280	32	40,960	62	81	19	0	Grind - AC Overlay	$245,760
2026-27	SNTFEA	19240	SANTA FE AVE	PRINCETON AVE	YALE AVE	E	3	AC	2	280	32	8,960	12	82	18	0	FDR	$110,477
2026-27	SHEPRD	19466	SHEPPARD DR	CANNON LN	DOROTHY LN	E	3	AC	2	510	32	16,320	51	58	40	2	Grind - AC Overlay	$97,920
2026-27	STANFD	19760	STANFORD AVE	CHAPMAN AVE	WILSHIRE AVE	E	3	AC	2	535	32	17,120	30	0	97	3	Grind - ARAM - Overlay	$105,630
2026-27	VALEND	20475	VALENCIA DR	HARBOR BLVD	LEMON AVE	E	3	AC	2	1,265	32	40,480	85	49	51	0	Type II Slurry Seal	$74,483
2026-27	WALNTA	20950	WALNUT AVE	HARBOR BLVD BRIDGE	LEMON ST BRIDGE	E	3	AC	2	1,215	32	38,880	83	0	100	0	Type II Slurry Seal	$71,539
2026-27	WALNTA	20960	WALNUT AVE	LEMON ST BRIDGE	END	E	3	AC	2	530	45	23,850	72	79	21	0	Type II Slurry Seal	$43,884
2026-27	WALNTA	20970	WALNUT AVE	BALCOM AVE	END	E	3	AC	2	1,920	32	61,440	87	0	100	0	Type II Slurry Seal	$113,050
2026-27	WALNTW	21020	WALNUT WAY	WALNUT AVE	LEMON ST	E	3	AC	2	434	32	13,888	78	31	41	28	Type II Slurry Seal	$25,554
2026-27	WHTNGA	21260	WHITING AVE	STANFORD AVE	RAYMOND AVE	E	3	AC	2	450	28	12,600	42	27	67	6	Grind - ARAM - Overlay	$77,742
2026-27	WILSHR	21405	WILSHIRE AVE	LAWRENCE AVE	BALCOM AVE	E	3	AC	2	663	36	23,868	78	71	29	0	Type II Slurry Seal	$43,917
2026-27	YALEAV	21620	YALE AVE	END	GLENWOOD AVE	E	3	AC	2	465	32	14,880	83	0	17	83	Type II Slurry Seal	$27,379
2026-27	YALEAV	21630	YALE AVE	CHAPMAN AVE	COMMONWEALTH AVE	E	3	AC	2	1,220	32	39,040	29	19	81	0	Grind - ARAM - Overlay	$240,877
2026-27	YALEAV	21635	YALE AVE	COMMONWEALTH	WALNUT AVE	E	3	AC	2	685	32	21,920	43	54	46	0	Grind - AC Overlay	$131,520
																		$6,995,508
2027-28	ALTURA	7050	ALTURA DR	LAS PALMAS DR	LAS PALMAS DR	E	6	AC	2	1,230	20	24,600	52	81	19	0	Grind - AC Overlay	$153,504
2027-28	ALVRDO	7060	ALVARADO CIR	CORONADO DR	END	E	6	AC	2	380	26	9,880	71	17	83	0	Type II Slurry Seal	$18,871
2027-28	ANACAP	8070	ANACAPA PL	END	SANTA BARBARA AVE	E	6	AC	2	1,984	32	63,488	57	58	6	36	Grind - AC Overlay	$396,165
2027-28	ARAGON	9040	ARAGON PL	END	CIENAGA DR	E	6	AC	2	305	32	9,760	55	62	38	0	Grind - AC Overlay	$60,902
2027-28	ARROUE	10010	ARROUES DR	N END	LANTANA AVE	E	6	AC	2	1,300	32	41,600	87	0	57	43	Type II Slurry Seal	$79,456
2027-28	ARROUE	10020	ARROUES DR	LANTANA AVE	E END	E	6	AC	2	153	32	4,896	81	55	40	5	Type II Slurry Seal	$9,351
2027-28	BALBOA	10470	BALBOA RD	END	BASTANCHURY RD	E	6	AC	2	360	32	11,520	83	0	75	25	Type II Slurry Seal	$22,003
2027-28	BARCEL	10550	BARCELONA CIR	CORONADO DR	END	E	6	AC	2	334	26	8,684	73	15	85	0	Type II Slurry Seal	$16,586
2027-28	BONITA	10835	BONITA PL	IMPERIAL HWY	CIENAGA DR	E	6	AC	2	429	36	15,444	50	25	75	0	Cape Seal	$38,301
2027-28	CABRIL	11040	CABRILLO CIR	CORONADO DR	END	E	6	AAC	2	325	28	9,100	78	16	84	0	Type II Slurry Seal	$17,381
2027-28	CAPIST	11430	CAPISTRANO CIR	CORONADO DR	END	E	6	AAC	2	336	32	10,752	71	11	89	0	Type II Slurry Seal	$20,536
2027-28	CATLIN	11540	CATALINA RD	SANTA BARBARA AVE	DOMINGO RD	E	6	AC	2	1,983	32	37,120	82	0	100	0	Type II Slurry Seal	$70,899
2027-28	CIELO	11730	CIELO PL	END	CIENAGA DR	E	6	AC	2	325	32	10,400	70	49	51	0	Type II Slurry Seal	$19,864
2027-28	CLARIO	11840	CLARION DR	LAKEVIEW DR	TERRAZA PL	E	6	AC	2	1,200	32	38,400	86	0	58	42	Type II Slurry Seal	$73,344
2027-28	CORONA	11960	CORONADO DR	END	CAPISTRANO CIR	E	6	AC	2	1,860	32	59,520	76	12	85	3	Type II Slurry Seal	$113,683
2027-28	DOMNGR	12450	DOMINGO RD	LAGUNA RD	JOSE WAY	E	6	AC	2	1,190	32	38,080	46	53	35	12	Grind - AC Overlay	$237,619
2027-28	DOMNGR	12460	DOMINGO RD	JOSE WAY	TERRAZA PL	E	6	AC	2	1,430	32	45,760	47	39	49	12	Grind - ARAM - Overlay	$293,779
2027-28	DOMNGR	12470	DOMINGO RD	TERRAZA PL	VERONA DR	E	6	AC	2	770	32	24,640	59	22	31	47	Grind - AC Overlay	$153,754
2027-28	ELMIRA	12720	EL MIRADOR DR	LANTANA AVE	MULBERRY AVE	E	6	AC	2	889	32	28,448	86	0	100	0	Type II Slurry Seal	$54,336
2027-28	FIRETHN	13210	FIRETHORNE AVE	BERNARD DR	ARROUES DR	E	6	AC	2	900	32	28,800	87	34	66	0	Type II Slurry Seal	$55,008
2027-28	HERMSD	14235	HERMOSA DR	LAS PALMAS DR	LAKEVIEW DR	E	6	AC	2	1,110	24	26,640	76	29	65	6	Type II Slurry Seal	$50,882

FY	BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Recommendations	Total $
2027-28	JOSEWY	14940	JOSE WAY	END	DOMINGO RD	E	6	AC	2	1,390	32	44,480	60	75	22	3	Grind - AC Overlay	$277,555
2027-28	LAENTD	15150	LA ENTRADA PL	CORONADO DR	HARBOR BL	E	6	AC	2	495	48	23,760	79	26	74	0	Type II Slurry Seal	$45,382
2027-28	LAGUNA	15290	LAGUNA RD	EUCLID ST	TERRAZA PL	E	6	AC	2	1,415	32	45,280	40	64	29	7	Grind - AC Overlay	$282,547
2027-28	LAGUNA	15310	LAGUNA RD	MORELIA PL	BASTANCHURY RD	E	6	AC	3	1,515	36	54,540	54	87	11	2	Grind - AC Overlay	$340,330
2027-28	LARIAT	15410	LARIAT PL	END	LAS RIENDAS DR	E	6	AC	2	200	32	6,400	39	63	36	1	Grind - AC Overlay	$39,936
2027-28	LSPLMS	15510	LAS PALMAS DR	LA TRAVESIA DR	RIDEOUT WAY	E	6	AC	2	1,895	32	60,640	58	76	24	0	Grind - AC Overlay	$378,394
2027-28	LSPLMS	15520	LAS PALMAS DR	RIDEOUT WAY	LAKEVIEW DR	E	6	AC	2	2,240	25	56,000	39	62	27	11	Grind - AC Overlay	$349,440
2027-28	LSPLMS	15535	LAS PALMAS DR	HARBOR BL	ALTURA DR	E	6	AC	2	1,028	30	14,400	61	44	53	3	Grind - AC Overlay	$89,856
2027-28	LSPLMS	15540	LAS PALMAS DR	ALTURA DR	TWILIGHT DR	E	6	AC	2	1,572	32	69,280	43	63	36	1	Grind - AC Overlay	$432,307
2027-28	LSPLMS	15550	LAS PALMAS DR	TWILIGHT DR	PUENTE ST	E	6	AC	2	2,105	32	67,360	38	75	25	0	Grind - AC Overlay	$420,326
2027-28	LSRDDR	15580	LAS RIENDAS DR	W END	TWILIGHT DR	E	6	AC	2	1,420	32	45,440	43	65	32	3	Grind - AC Overlay	$283,546
2027-28	LSRDDR	15590	LAS RIENDAS DR	TWILIGHT DR	E END	E	6	AC	2	1,000	32	32,000	64	53	47	0	Grind - AC Overlay	$199,680
2027-28	LIDOPL	15740	LIDO PL	END	DOMINGO RD	E	6	AC	2	450	32	14,400	70	25	49	26	Type II Slurry Seal	$27,504
2027-28	MIRDOR	16770	MIRADOR CIR	END	LA ENTRADA PL	E	6	AC	2	250	32	8,000	74	16	84	0	Type II Slurry Seal	$15,280
2027-28	MORLAP	16930	MORELIA PL	MORELIA AVE	LAGUNA RD	E	6	AC	2	960	30	28,800	60	19	65	16	Cape Seal	$71,424
2027-28	NIETO	17120	NIETO PL	XIMENO DR	CIENAGA DR	E	6	AC	2	290	32	9,280	46	56	44	0	Grind - AC Overlay	$57,907
2027-28	PALOMA	17670	PALOMA PL	END	LAGUNA RD	E	6	AC	2	540	32	17,280	39	56	25	19	Grind - AC Overlay	$107,827
2027-28	PUENTE	18230	PUENTE ST	IMPERIAL HWY	EADINGTON DR	E	6	AC	2	1,330	36	47,880	75	31	66	3	Type II Slurry Seal	$91,451
2027-28	PUENTE	18240	PUENTE ST	EADINGTON DR	END	E	6	AC	2	1,570	36	56,520	84	0	100	0	Type II Slurry Seal	$107,953
2027-28	ROSRTA	18880	ROSARITA DR	PUENTE ST	NORTHERN CITY LIMIT	E	6	AC	2	550	38	20,900	49	61	39	0	Grind - AC Overlay	$130,416
2027-28	SANANT	19070	SAN ANTONIO AVE	LANTANA AVE	BREA BLVD	E	6	AC	2	1,175	32	37,600	84	53	44	3	Type II Slurry Seal	$71,816
2027-28	SANMAR	19140	SAN MARCOS PL	END	CIENAGA DR	E	6	AC	2	175	32	5,600	39	70	30	0	Grind - AC Overlay	$34,944
2027-28	SANMIG	19150	SAN MIGUEL DR	END	CIENAGA DR	E	6	AC	2	245	32	7,840	42	66	30	4	Grind - AC Overlay	$48,922
2027-28	SANMIG	19160	SAN MIGUEL DR	LAS RIENDAS DR	END	E	6	AC	2	445	32	14,240	40	49	42	9	Grind - AC Overlay	$88,858
2027-28	SANPAB	19170	SAN PABLO DR	LAS RIENDAS DR	END	E	6	AC	2	400	32	12,800	47	70	29	1	Grind - AC Overlay	$79,872
2027-28	SKINNR	19520	SKINNER PL	END	LAS RIENDAS DR	E	6	AC	2	250	32	8,000	48	49	51	0	Grind - AC Overlay	$49,920
2027-28	TERMNO	20110	TERMINO PL	XIMENO DR	CIENAGA DR	E	6	AC	2	260	32	8,320	56	42	42	16	Grind - AC Overlay	$51,917
2027-28	TERAZA	20120	TERRAZA PL	LAKESIDE DR	DOMINGO RD	E	6	AC	2	1,105	32	35,360	40	53	14	33	Grind - AC Overlay	$220,646
2027-28	TERAZA	20150	TERRAZA PL	RANCHO CIR	DOMINGO RD	E	6	AC	2	2,035	32	65,120	63	62	25	13	Grind - AC Overlay	$406,349
2027-28	TETON	20160	TETON DR	SUNNY HILLS RD	LAS PALMAS DR	E	6	AC	2	265	32	8,480	74	0	47	53	Type II Slurry Seal	$16,197
2027-28	TUNALS	20360	TUNALES DR	LAS RIENDAS DR	LAS PALMAS DR	E	6	AC	2	845	32	27,040	64	41	29	30	Grind - AC Overlay	$168,730
2027-28	TWILGT	20380	TWILIGHT DR	LAS RIENDAS DR	SUNNY HILLS RD	E	6	AC	2	580	32	18,560	78	40	55	5	Type II Slurry Seal	$35,450
2027-28	VERONA	20670	VERONA DR	RANCHO CIR	PASEO DORADO	E	6	AC	2	2,205	32	70,560	41	51	38	11	Grind - AC Overlay	$440,294
2027-28	YUCCA	21670	YUCCA AVE	END	LAGUNA RD	E	6	AC	2	2,235	32	71,520	39	51	37	12	Grind - AC Overlay	$446,285
																		$7,865,485
2028-29	ALMIRA	7000	ALMIRA AVE	CYPRESS AVE	YORBA LINDA BLVD	E	4	AC	2	1,430	32	45,760	71	70	26	4	Type II Slurry Seal	$91,062
2028-29	BALFOU	10520	BALFOUR AVE	STATE COLLEGE BLVD	SAN CARLOS DR	E	4	AC	2	1,081	32	34,592	83	0	74	26	Type II Slurry Seal	$68,838
2028-29	BALFOU	10530	BALFOUR AVE	SAN CARLOS DR	COMMONWEALTH AVE	E	4	AC	2	791	32	25,312	83	0	95	5	Type II Slurry Seal	$50,371
2028-29	BALFOU	10535	BALFOUR AVE	COMMONWEALTH AVE	DEREK DR	E	4	AC	2	880	32	28,160	78	5	71	24	Type II Slurry Seal	$56,038
2028-29	BAXTER	10640	BAXTER ST	VIA BURTON ST	91 FWY	E	4	AC	2	681	32	21,792	68	28	62	10	Type II Slurry Seal	$43,366
2028-29	BEACON	10660	BEACON ST	CLAIRMONT AVE	MYSTIC AVE	E	4	AC	2	741	32	23,712	82	55	45	0	Type II Slurry Seal	$47,187
2028-29	BURTPL	11010	BURT PL	CYPRESS WAY	END	E	4	AC	2	223	32	7,136	84	35	65	0	Type II Slurry Seal	$14,201
2028-29	CAMBRI	11140	CAMBRIDGE AVE	WINCHESTER ST	BASTANCHURY RD	E	4	AC	2	1,117	32	35,744	81	64	36	0	Type II Slurry Seal	$71,131
2028-29	CAMEO	11160	CAMEO LN	TOPAZ LN	GARNET LN	E	4	AC	2	273	37	10,101	78	0	100	0	Type II Slurry Seal	$20,101
2028-29	CAMEO	11170	CAMEO LN	GARNET LN	PEARL DR	E	4	AC	2	280	37	10,360	78	0	100	0	Type II Slurry Seal	$20,616
2028-29	CAMEO	11180	CAMEO LN	PEARL DR	QUARTZ LN	E	4	AC	2	302	37	11,174	80	14	86	0	Type II Slurry Seal	$22,236
2028-29	CHAPFRONT	70010	CHAPMAN AVE (FRONTAGE)	COMMONWEALTH AVE	DEER DR	E	4	AC	2	955	30	28,650	79	41	52	7	Type II Slurry Seal	$57,014
2028-29	COLLEG	11875	COLLEGE PL	COMMONWEALTH AVE	LANGSDORF DR	E	4	AC	2	525	32	16,800	74	33	59	8	Type II Slurry Seal	$33,432
2028-29	DAWNS	12260	DAWNS WAY	ACACIA AVE	END	E	4	AC	2	440	32	14,080	53	26	58	16	Grind - AC Overlay	$91,379
2028-29	DEERPK	12270	DEERPARK DR	TREEVIEW PL	EUCALYPTUS PL	E	4	AC	2	715	32	22,955	76	43	52	5	Type II Slurry Seal	$45,680
2028-29	DEERPK	12275	DEERPARK DR	EUCALYPTUS PL	DEVONSHIRE AVE	E	4	AC	2	1,320	32	43,262	76	43	52	5	Type II Slurry Seal	$86,091
2028-29	DEERPK	12290	DEERPARK DR	GARNET LN	MADISON AVE	E	4	AC	2	1,620	37	59,940	83	0	36	64	Type II Slurry Seal	$119,281
2028-29	DEREK	12380	DEREK DR	END	SANTA CLARA AVE	E	4	AC	2	2,031	32	64,992	45	51	41	8	Grind - AC Overlay	$421,798
2028-29	DEVNSH	12390	DEVONSHIRE AVE	DEERPARK DR	HARTFORD AVE	E	4	AC	2	850	32	27,200	27	58	37	5	Grind - AC Overlay	$176,528
2028-29	EUCALY	13000	EUCALYPTUS PL	DEERPARK DR	END	E	4	AC	2	680	24	16,320	80	28	43	29	Type II Slurry Seal	$32,477
2028-29	FENDAV	13085	FENDER AVE	ST COLLEGE BL	PLACENTIA AVE	E	4	AC	2	2,600	38	98,800	69	47	39	14	Type II Slurry Seal	$196,612
2028-29	FERNDR	13170	FERN DR	VICTORIA DR	HALE AVE	E	4	AC	2	250	32	8,000	74	53	47	0	Type II Slurry Seal	$15,920
2028-29	GARNET	13500	GARNET LN	DEER PARK DR	PLACENTIA AVE	E	4	AC	2	1,110	37	41,070	79	23	65	12	Type II Slurry Seal	$81,729
2028-29	GARNET	13510	GARNET LN	PLACENTIA AVE	SAPPHIRE RD	E	4	AC	2	1,290	37	47,730	62	0	91	9	Cape Seal	$122,666
2028-29	GLNWOD	13670	GLENWOOD AVE	MOUNTAIN VIEW PL	HALE AVE	E	4	AC	2	340	32	10,880	81	14	84	2	Type II Slurry Seal	$21,651
2028-29	HANSEN	14030	HANSEN AVE	END	WALLACE AVE	E	4	AC	2	1,005	32	32,160	54	72	28	0	Grind - AC Overlay	$208,718
2028-29	HARTFD	14140	HARTFORD AVE	ROLLING HILLS DR	TREEVIEW PL	E	4	AC	2	141	35	4,935	87	16	53	31	Type II Slurry Seal	$9,821
2028-29	HARTFD	14150	HARTFORD AVE	END	BASTANCHURY RD	E	4	AC	2	1,635	32	52,320	28	69	31	0	Grind - AC Overlay	$339,557
2028-29	HIGCRT	14340	HIGHCREST CT	MOUNTAIN RIDGE DR	END	E	4	AC	2	150	26	3,900	86	0	82	18	Type II Slurry Seal	$7,761
2028-29	HLLTOP	14550	HILLTOP CT	S END	MOUNTAIN RIDGE DR	E	4	AC	2	540	26	14,040	81	0	41	59	Type II Slurry Seal	$27,940
2028-29	HLLTOP	14560	HILLTOP CT	MOUNTAIN RIDGE DR	N END	E	4	AC	2	275	26	7,150	87	0	100	0	Type II Slurry Seal	$14,229
2028-29	HILLVW	14570	HILLVIEW CIR	END	MOUNTAIN RIDGE DR	E	4	AC	2	435	26	11,310	82	0	47	53	Type II Slurry Seal	$22,507
2028-29	IVYPL	14770	IVY PL	END	DEVONHIRE AVE	E	4	AC	2	180	32	5,760	33	52	43	5	Grind - AC Overlay	$37,382
2028-29	KMBRLY	15040	KIMBERLY AVE	STATE COLLEGE BLVD	PLACENTIA AVE	E	4	AC	2	2,150	32	68,800	79	0	95	5	Type II Slurry Seal	$136,912
2028-29	LADRVS	15270	LADERA VISTA DR	END	CHAPMAN AVE	E	4	AC	2	1,440	32	46,080	26	77	23	0	Grind - AC Overlay	$299,059
2028-29	LNGDRF	15380	LANGSDORF DR	NUTWOOD AVE	COLLEGE PL	E	4	AC	2	910	32	29,120	80	22	78	0	Type II Slurry Seal	$57,949
2028-29	LILLIE	15755	LILLIE AVE	COMMONWEALTH AVE	SANTA FE AVE	E	4	AC	2	490	32	15,680	82	0	85	15	Type II Slurry Seal	$31,203
2028-29	LNGSPR	15990	LONG SPUR DR	END	STARLING DR	E	4	AC	2	910	32	24,160	86	0	100	0	Type II Slurry Seal	$48,078

FY	BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Recommendations	Total $
2028-29	LNGSPR	16000	LONG SPUR DR	STARLING DR	END	E	4	AC	2	652	32	8,640	87	0	100	0	Type II Slurry Seal	$17,194
2028-29	MADISA	16130	MADISON AVE	END	PLACENTIA AVE	E	4	AC	2	715	37	28,955	76	0	36	64	Type II Slurry Seal	$57,620
2028-29	MAERTN	16170	MAERTIN LN	DOROTHY LN	END	E	4	AC	2	220	27	5,940	59	61	39	0	Grind - AC Overlay	$38,551
2028-29	MAERTN	16180	MAERTIN LN	VICTORIA DR	GROVE PL	E	4	AC	2	1,398	32	44,736	52	72	28	0	Grind - AC Overlay	$290,337
2028-29	MEDFRD	16550	MEDFORD PL	END	MYSTIC AVE	E	4	AC	2	230	32	7,360	85	16	84	0	Type II Slurry Seal	$14,646
2028-29	MILTON	16720	MILTON AVE	ASSOCIATED RD	DEREK DR	E	4	AC	2	1,190	32	38,080	85	0	96	4	Type II Slurry Seal	$75,779
2028-29	MISSON	16840	MISSION DR	BALFOUR AVE	COMMONWEALTH AVE	E	4	AC	2	235	32	7,520	86	0	100	0	Type II Slurry Seal	$14,965
2028-29	MOODY	16880	MOODY AVE	END	ALMIRA AVE	E	4	AC	2	600	25	15,000	80	29	50	21	Type II Slurry Seal	$29,850
2028-29	MNTRDG	16940	MOUNTAIN RIDGE DR	STATE COLLEGE BLVD	BASTANCHURY RD	E	4	AC	2	1,952	32	62,464	84	0	79	21	Type II Slurry Seal	$124,303
2028-29	MNTVWP	16950	MOUNTAIN VIEW PL	VICTORIA DR	CHAPMAN AVE	E	4	AC	2	2,130	32	68,160	74	46	48	6	Type II Slurry Seal	$135,638
2028-29	MYSTIC	17010	MYSTIC AVE	CAMBRIDGE AVE	PLACENTIA AVE	E	4	AC	2	1,140	32	36,480	84	31	48	21	Type II Slurry Seal	$72,595
2028-29	OAKRDG	17315	OAK RIDGE CT	END	MOUNTAIN RIDGE DR	E	4	AC	2	270	26	7,020	83	0	58	42	Type II Slurry Seal	$13,970
2028-29	OXFORD	17570	OXFORD AVE	END	YORBA LINDA BLVD	E	4	AC	2	500	37	18,500	82	0	100	0	Type II Slurry Seal	$36,815
2028-29	PALMDR	17630	PALM DR	PLACENTIA AVE	COLLINS WAY	E	4	AC	2	1,405	32	44,960	64	33	65	2	Cape Seal	$115,547
2028-29	PALMDR	17640	PALM DR	COLLINS WAY	BRADFORD AVE	E	4	AC	2	1,075	32	34,400	67	9	68	23	Cape Seal	$88,408
2028-29	PEARL	17810	PEARL DR	CAMEO LN	SAPPHIRE RD	E	4	AC	2	990	37	36,630	82	0	100	0	Type II Slurry Seal	$72,894
2028-29	PINCRT	17930	PINECREST CT	END	MOUNTAIN RIDGE DR	E	4	AC	2	225	26	5,850	85	0	66	34	Type II Slurry Seal	$11,642
2028-29	PINTAL	17940	PINTAIL DR	SPARROW DR	ROLING HILLS DR	E	4	AC	2	165	36	5,940	85	0	85	15	Type II Slurry Seal	$11,821
2028-29	QUARTZ	18270	QUARTZ LN	PLACENTIA AVE	SAPPHIRE RD	E	4	AC	2	1,290	37	47,730	83	11	85	4	Type II Slurry Seal	$94,983
2028-29	QUARTZ	50005	QUARTZ LN	BRADFORD AVE	END	E	4	AC	0	450	32	14,400	43	90	10	0	Grind - AC Overlay	$93,456
2028-29	ROLLHL	18760	ROLLING HILLS DR	ASSOCIATED RD	HARTFORD AVE	E	4	AC	2	1,445	58	83,810	79	24	61	15	Type II Slurry Seal	$166,782
2028-29	ROLLHL	18770	ROLLING HILLS DR	HARTFORD AVE	PLACENTIA AVE	E	4	AC	2	1,775	58	102,950	81	32	68	0	Type II Slurry Seal	$204,871
2028-29	ROSSLN	18985	ROSSLYNN AVE	ACACIA AVE	END	E	4	AC	2	920	32	29,440	29	68	32	0	Grind - AC Overlay	$191,066
2028-29	SANCAR	19080	SAN CARLOS DR	N END	COMMONWEALTH AVE	E	4	AC	2	740	43	31,820	59	56	43	1	Grind - AC Overlay	$206,512
2028-29	SNTCLP	19210	SANTA CLARA PL	END	SANTA CLARA AVE	E	4	AC	2	290	32	9,280	80	13	84	3	Type II Slurry Seal	$18,467
2028-29	SNTFEA	19280	SANTA FE AVE	LILLIE AVE	STATE COLLEGE BLVD	E	4	AC	2	455	32	14,560	86	17	76	7	Type II Slurry Seal	$28,974
2028-29	SNTFEA	19290	SANTA FE AVE	SANTA CLARA AVE	DEREK DR	E	4	AC	2	1,495	32	47,840	49	73	10	17	Grind - AC Overlay	$310,482
2028-29	SNTYBL	19340	SANTA YSABEL AVE	SAN CARLOS AVE	DEREK DR	E	4	AC	2	1,315	32	42,080	72	67	33	0	Type II Slurry Seal	$83,739
2028-29	SPPHRE	19370	SAPPHIRE RD	YORBA LINDA BLVD	QUARTZ LN	E	4	AC	2	1,740	37	64,380	71	72	27	1	Type II Slurry Seal	$128,116
2028-29	SHEFLD	19455	SHEFFIELD PL	W END	BEACON ST	E	4	AC	2	271	32	8,672	85	0	100	0	Type II Slurry Seal	$17,257
2028-29	SHERWD	19470	SHERWOOD AVE	AMHERST AVE	DEREK DR	E	4	AC	2	680	32	21,760	87	0	100	0	Type II Slurry Seal	$43,302
2028-29	SPARRW	19690	SPARROW DR	END	PINTAIL DR	E	4	AC	2	710	32	22,720	81	0	100	0	Type II Slurry Seal	$45,213
2028-29	SPARRW	19700	SPARROW DR	PINTAIL DR	END	E	4	AC	2	505	32	16,160	86	0	100	0	Type II Slurry Seal	$32,158
2028-29	STARLG	19800	STARLING DR	LONGSPUR DR	PLACENTIA AVE	E	4	AC	2	145	44	6,380	87	31	69	0	Type II Slurry Seal	$12,696
2028-29	STATEFRONT	4240	STATE COLLEGE BLVD (FRONTAGE)	ALLEY n/o CLARKE AVE	BALFOUR AVE	E	4	AC	2	485	26	12,610	58	34	37	29	Grind - AC Overlay	$81,839
2028-29	TEALDR	20090	TEAL DR	LONGSPUR DR	SPARROW DR	E	4	AC	2	520	32	16,640	86	0	100	0	Type II Slurry Seal	$33,114
2028-29	TERIPL	20100	TERI PL	AMHERRST AVE	MILTON AVE	E	4	AC	2	618	32	19,776	84	32	68	0	Type II Slurry Seal	$39,354
2028-29	THORN	20200	THORN PL	END	WINCHESTER ST	E	4	AC	2	470	32	15,040	39	64	33	3	Grind - AC Overlay	$97,610
2028-29	TITAN	20240	TITAN DR	NUTWOOD AVE	END	E	4	AC	2	380	37	14,060	73	13	86	1	Type II Slurry Seal	$27,979
2028-29	TOPAZ	20250	TOPAZ LN	PLACENTIA AVE	SAPPHIRE RD	E	4	AC	2	1,290	37	47,730	62	37	61	2	Cape Seal	$122,666
2028-29	TOPAZ	20260	TOPAZ LN	SAPPHIRE RD	BRADFORD AVE	E	4	AC	2	1,265	32	40,480	54	38	17	45	Grind - AC Overlay	$262,715
2028-29	TREEVW	20280	TREEVIEW PL	DEERPARK DR	END	E	4	AC	2	1,055	32	33,760	78	64	28	8	Type II Slurry Seal	$67,182
2028-29	TREEVW	20290	TREEVIEW PL	END	MEDFORD PL	E	4	AC	2	530	32	16,960	86	0	100	0	Type II Slurry Seal	$33,750
2028-29	UNION	20460	UNION AVE	MOUNTAIN VIEW PL	END	E	4	AC	2	315	32	10,080	42	64	36	0	Grind - AC Overlay	$65,419
2028-29	VANGFT	20630	VANDERGRIFT DR	DEERPARK DR	END	E	4	AC	2	130	32	4,160	78	26	40	34	Type II Slurry Seal	$8,278
2028-29	VIABUR	20690	VIA BURTON	END	BAXTER ST / EASTERN CITY LIMIT	E	4	AC	2	560	32	17,920	45	72	23	5	Grind - AC Overlay	$116,301
2028-29	WALLCE	20900	WALLACE AVE	SANTA CLARA AVE	DEREK DR	E	4	AC	2	1,100	32	35,200	82	17	80	3	Type II Slurry Seal	$70,048
2028-29	WALNTA	21000	WALNUT AVE	ACACIA AVE	HALE AVE	E	4	AC	2	950	36	34,200	85	18	82	0	Type II Slurry Seal	$68,058
2028-29	WALNTA	21010	WALNUT AVE	HALE AVE	STATE COLLEGE BLVD	E	4	AC	2	1,600	36	57,600	87	31	65	4	Type II Slurry Seal	$114,624
2028-29	WILDWD	21280	WILDWOOD CT	N END	MOUNTAIN RIDGE DR	E	4	AC	2	270	26	7,020	84	0	66	34	Type II Slurry Seal	$13,970
																		$7,372,079
2029-30	ARMSTE	10000	ARMSTEAD LN	END	CAMINO DEL SOL	E	8	AC	2	263	32	8,416	41	46	54	0	Grind - ARAM - Overlay	$58,407
2029-30	AVEDNO	10330	AVENIDA DEL NORTE	END	PARKS RD	E	8	AC	2	415	32	13,280	33	29	70	1	Grind - ARAM - Overlay	$92,163
2029-30	BISCAY	10810	BISCAYNE PL	CARLETON WAY	END	E	8	AC	2	371	32	11,872	68	6	94	0	Type II Slurry Seal	$24,575
2029-30	BURNTR	10980	BURNING TREE RD	CLEAR CREEK DR	ISLAND DR	E	8	AC	2	505	36	18,180	36	22	69	9	Grind - ARAM - Overlay	$126,169
2029-30	BURNTR	11005	BURNING TREE RD	MALVERN AVE	MOORE AVE	E	8	AC	2	750	32	24,000	52	0	95	5	Cape Seal	$64,320
2029-30	CALAVE	11055	CALAVERA PL	CAMINO CENTROLOMA	END	E	8	AC	2	309	32	9,888	73	7	93	0	Type II Slurry Seal	$20,468
2029-30	CALULT	11130	CALLE ULTIMO	END	CALLE SERENA	E	8	AC	2	176	32	5,632	32	41	59	0	Grind - ARAM - Overlay	$39,086
2029-30	CAMIAL	11200	CAMINO ALTO	END	DOMINGO RD	E	8	AC	2	438	32	14,016	70	0	100	0	Type II Slurry Seal	$29,013
2029-30	CAMISO	11265	CAMINO DEL SOL	PASEO DORADO	DOMINGO RD	E	8	AC	2	430	32	13,760	87	0	100	0	Type II Slurry Seal	$28,483
2029-30	CAMIES	11270	CAMINO ESCONDIDO	CALLE CANDELA	END	E	8	AC	2	567	32	18,144	68	7	71	22	Type II Slurry Seal	$37,558
2029-30	CAMIVI	11290	CAMINO LA VISTA	END	DOMINGO RD	E	8	AC	2	245	32	7,840	68	0	98	2	Type II Slurry Seal	$16,229
2029-30	CAMILO	11310	CAMINO LOMA	END	DOMINGO RD	E	8	AC	2	374	32	11,968	77	0	98	2	Type II Slurry Seal	$24,774
2029-30	CAMIRO	11320	CAMINO LOS ROBLES	END	DOMINGO RD	E	8	AC	2	229	32	7,328	76	0	95	5	Type II Slurry Seal	$15,169
2029-30	CASTLW	11530	CASTLEWOOD DR	GILBERT ST	PARKS RD	E	8	AC	2	1,295	32	41,440	49	26	73	1	Grind - ARAM - Overlay	$287,594
2029-30	ELPASO	12740	EL PASO LN	CELESTE LN	PARKS RD	E	8	AC	2	845	32	27,040	38	43	54	3	Grind - ARAM - Overlay	$187,658
2029-30	FARVIW	13070	FARVIEW RD	FAIRGREEN DR	SUNNY RIDGE DR	E	8	AC	2	175	32	5,600	42	37	54	9	Grind - ARAM - Overlay	$38,864
2029-30	GRSMPK	13810	GRISSOM PARK DR	PASEO GRANDE	MANZANITA DR	E	8	AC	2	1,981	32	69,120	27	48	40	12	Grind - AC Overlay	$466,560
2029-30	ISLAND	14740	ISLAND DR	N END	BURNING TREE RD	E	8	AC	2	1,440	32	46,080	27	47	46	7	Grind - AC Overlay	$311,040
2029-30	ISLAND	14750	ISLAND DR	BURNING TREE RD	S END	E	8	AC	2	655	32	20,960	39	38	62	0	Grind - ARAM - Overlay	$145,462
2029-30	LSLNSC	15480	LAS LANAS CIR	LAS LANAS LN	END	E	8	AC	2	130	32	4,160	25	56	42	2	Grind - AC Overlay	$28,080
2029-30	LWNWOD	15650	LAWNWOOD DR	COYOTE HILLS DR	WINTERWOOD DR	E	8	AC	2	320	32	10,240	52	42	57	1	Grind - AC Overlay	$69,120
2029-30	LOCKLN	15910	LOCKLIN WAY	FAIRFORD DR	SUNNY RIDGE DR	E	8	AC	2	135	32	4,320	25	64	18	18	Grind - AC Overlay	$29,160

FY	BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Recommendations	Total $
2029-30	LOCKLN	15915	LOCKLIN WAY	SUNNY RIDGE DR	BARONET PL	E	8	AC	2	150	32	4,800	44	50	49	1	Grind - ARAM - Overlay	$33,312
2029-30	MANZNT	16250	MANZANITA DR	CAMINO REY	CAMINO DEL SOL	E	8	AC	2	1,690	32	54,080	30	44	41	15	Grind - AC Overlay	$365,040
2029-30	MARPSA	16380	MARIPOSA LN	CAMINO CENTROLOMA	END	E	8	AC	2	530	32	16,960	45	50	38	12	Grind - AC Overlay	$114,480
2029-30	MARPSA	16400	MARIPOSA LN	END	PASEO DORADO	E	8	AC	2	505	32	16,160	27	66	31	3	Grind - AC Overlay	$109,080
2029-30	MOORE	16910	MOORE AVE	END	BURNING TREE RD	E	8	AC	2	880	38	35,000	59	0	96	4	Cape Seal	$93,800
2029-30	MOORE	16913	MOORE AVE	BURNING TREE RD	GILBERT ST	E	8	AC	3	1,575	38	59,850	72	3	60	37	Type II Slurry Seal	$123,890
2029-30	NICLSD	17100	NICOLAS DR	END	CAMINO DEL SOL	E	8	AC	2	910	36	32,760	41	36	47	17	Grind - AC Overlay	$221,130
2029-30	PARKSR	17690	PARKS RD	CASTLEWOOD DR	AVENIDA DEL NORTE	E	8	AC	2	1,485	32	47,520	39	51	33	16	Grind - AC Overlay	$320,760
2029-30	PARKSR	17700	PARKS RD	AVENIDA DEL NORTE	ROSECRANS AVE	E	8	AC	2	1,155	60	69,300	47	39	48	13	Grind - AC Overlay	$467,775
2029-30	PASDOR	17720	PASEO DORADO	DOMINGO RD	CAMINO LA VISTA	E	8	AC	2	805	32	25,760	26	54	37	9	Grind - AC Overlay	$173,880
2029-30	PASGRN	17740	PASEO GRANDE	GRISSOM PARK DR	MANZANITA DR	E	8	AC	2	870	32	27,840	31	47	44	9	Grind - AC Overlay	$187,920
2029-30	PIONEA	17960	PIONEER AVE	SUNNY RIDGE DR	AVENIDA SELVA	E	8	AC	2	1,100	32	35,200	38	54	40	6	Grind - AC Overlay	$237,600
2029-30	PIONEA	17965	PIONEER AVE	AVENIDA SELVA	GILBERT ST	E	8	AC	3	465	32	9,760	82	0	44	56	Type II Slurry Seal	$20,203
2029-30	POSTRD	18080	POST RD	GREENHILL RD	TARRYTOWN DR	E	8	AC	2	790	32	25,280	31	54	40	6	Grind - AC Overlay	$170,640
2029-30	POSTRD	18095	POST RD	LARKWOOD DR	SUNNY RIDGE DR	E	8	AC	2	135	32	4,320	26	73	12	15	Grind - AC Overlay	$29,160
2029-30	RAYMER	18350	RAYMER AVE	AIRPARK DR	GILBERT ST	E	8	AC	2	735	40	29,400	33	51	23	26	Grind - AC Overlay	$198,450
2029-30	RAYMER	18360	RAYMER AVE	GILBERT ST	END	E	8	AC	2	1,635	38	62,130	36	46	37	17	Grind - AC Overlay	$419,378
2029-30	REDWLW	18430	RED WILLOW RD	GALLIO DR	BURING TREE RD	E	8	AC	2	705	32	22,560	31	66	25	9	Grind - AC Overlay	$152,280
2029-30	ROYALE	18990	ROYALE PL	SUNNY RIDGE DR	END	E	8	AC	2	540	32	17,280	25	64	28	8	Grind - AC Overlay	$116,640
2029-30	SUNRDG	19910	SUNNY RIDGE DR	ROSECRANS AVE	LOCKLIN WAY	E	8	AC	2	1,312	36	47,232	33	56	34	10	Grind - AC Overlay	$318,816
2029-30	SUNRDG	19920	SUNNY RIDGE DR	LOCKLIN WAY	PIONEER AVE	E	8	AC	2	1,523	32	48,736	33	52	48	0	Grind - AC Overlay	$328,968
2029-30	SUNRDG	19930	SUNNY RIDGE DR	PIONEER AVE	CARMEL CIR	E	8	AC	2	1,870	32	59,840	51	44	46	10	Grind - AC Overlay	$403,920
2029-30	SUNRDG	19940	SUNNY RIDGE DR	CARMEL CIR	MALVERN AVE	E	8	AC	2	1,360	48	65,280	40	56	35	9	Grind - AC Overlay	$440,640
2029-30	SUNCRT	19865	SUNNYCREST DR	VALENCIA MESA DR	SUNNY KNOLL	E	8	AC	0	375	32	12,000	85	0	100	0	Type II Slurry Seal	$24,840
2029-30	SUNCRT	19870	SUNNYCREST DR	SUNNY KNOLL	RICHMAN AVE	E	8	AC	0	1,115	32	35,680	80	0	100	0	Type II Slurry Seal	$73,858
2029-30	SUNCRT	19880	SUNNYCREST DR	RICHMAN AVE	VALLEY VIEW DR	E	8	AC	0	1,810	32	57,920	86	0	100	0	Type II Slurry Seal	$119,894
2029-30	TARYTN	20070	TARRYTOWN DR	PIONEER AVE	POST RD	E	8	AC	2	140	32	4,480	44	61	38	1	Grind - AC Overlay	$30,240
2029-30	TARYTN	20073	TARRYTOWN DR	POST RD	CARLETON WY	E	8	AC	2	535	32	17,120	30	61	32	7	Grind - AC Overlay	$115,560
2029-30	TIFFNY	20220	TIFFANY PL	FAIRGREEN DR	END	E	8	AC	2	505	32	16,160	32	48	43	9	Grind - AC Overlay	$109,080
2029-30	WARBTN	21060	WARBURTON WAY	U.P.R.R.	BASTANCHURY RD	E	8	AC	5	280	53	14,840	74	0	68	32	Type II Slurry Seal	$30,719
																		$7,691,904
2030-31	ASHAVE	10080	ASH AVE	MAGNOLIA AVE	PRITCHARD AVE	E	1	AC	2	975	32	31,200	68	32	68	0	Type II Slurry Seal	$67,080
2030-31	EADING	12590	EADINGTON AVE	ORANGETHORPE AVE	BAKER AVE	E	1	AC	2	885	32	28,320	80	69	31	0	Type II Slurry Seal	$60,888
2030-31	EADING	12595	EADINGTON AVE	BAKER AVE	HOUSTON AVE	E	1	AC	2	725	32	23,200	83	53	47	0	Type II Slurry Seal	$49,880
2030-31	HILLAV	14474	HILL AVE	CITRUS AVE	EUCLID ST	E	1	AAC	0	1,050	32	36,200	69	50	50	0	Type II Slurry Seal	$77,830
2030-31	HOUSTN	14660	HOUSTON AVE	ROBERTA AVE	PACIFIC DR	E	1	AC	2	975	32	31,200	87	45	46	9	Type II Slurry Seal	$67,080
2030-31	HOUSTN	50030	HOUSTON AVE	KNUCKLE (100' E/ COURTNEY AVE)	END	E	1	AC	2	1,268	30	36,985	73	37	49	14	Type II Slurry Seal	$79,518
2030-31	JUNIPR	14970	JUNIPER AVE	END	FLOWER AVE	E	1	AC	2	230	26	5,980	83	26	53	21	Type II Slurry Seal	$12,857
2030-31	LOCUST	15930	LOCUST DR	VALENCIA DR	OAK AVE	E	1	AC	2	760	32	24,320	87	0	30	70	Type II Slurry Seal	$52,288
2030-31	OAKAVE	17240	OAK AVE	MAGNOLIA AVE	JENSEN WAY	E	1	AC	2	1,850	32	59,200	85	28	72	0	Type II Slurry Seal	$127,280
2030-31	OAKAVE	17255	OAK AVE	COURTNEY AVE	BROOKHURST RD	E	1	AC	2	1,265	32	40,480	83	0	100	0	Type II Slurry Seal	$87,032
2030-31	OLIVE	17395	OLIVE AVE	LINDY PL	PINE DR	E	1	AC	2	1,245	32	39,840	86	0	100	0	Type II Slurry Seal	$85,656
2030-31	OLIVE	17400	OLIVE AVE	PINE DR	COURTNEY AVE	E	1	AC	2	996	32	31,872	81	33	67	0	Type II Slurry Seal	$68,525
2030-31	ORANGE	17460	ORANGE AVE	ASH AVE	OLIVE AVE	E	1	AC	2	490	32	15,680	35	70	27	3	Grind - AC Overlay	$110,074
2030-31	ORANFRON	9900	ORANGETHROPE (FRONTAGE)	PACIFIC DR	END	E	1	AC	2	1,834	32	58,688	28	91	7	2	Grind - AC Overlay	$411,990
2030-31	ORANFRON	9905	ORANGETHROPE (FRONTAGE)	BASQUE AVE	ORCHARD AVE	E	1	AC	2	895	26	23,270	82	20	80	0	Type II Slurry Seal	$50,031
2030-31	ORANFRON	9915	ORANGETHROPE (FRONTAGE)	END w/o COURTNEY AVE	END e/o CEDAR AVE	E	1	AC	2	1,034	32	33,088	28	55	26	19	Grind - AC Overlay	$232,278
2030-31	ORANFRON	9930	ORANGETHROPE (FRONTAGE)	BASQUE AVE	CITRUS AVE	E	1	AC	2	1,536	32	49,152	27	66	33	1	Grind - AC Overlay	$345,047
2030-31	ORANFRON	9935	ORANGETHROPE (FRONTAGE)	END	BASQUE AVE	E	1	AC	2	2,209	26	57,434	39	42	57	1	Grind - AC Overlay	$403,187
2030-31	ORCHRD	17520	ORCHARD AVE	ELM AVE	OLIVE AVE	E	1	AC	2	245	32	7,840	33	59	33	8	Grind - AC Overlay	$55,037
2030-31	ORCHRD	17530	ORCHARD AVE	HILL AVE	ORANGETHORPE AVE	E	1	AC	2	560	32	17,920	29	87	13	0	Grind - AC Overlay	$125,798
2030-31	ORCHRD	17538	ORCHARD AVE	WOODCREST AVE	BAKER AVE	E	1	AC	2	510	32	16,320	40	56	44	0	Grind - AC Overlay	$114,566
2030-31	ORCHRD	17539	ORCHARD AVE	BAKER AVE	HOUSTON AVE	E	1	AC	2	750	32	24,000	29	83	17	0	Grind - AC Overlay	$168,480
2030-31	ORCRDP	17540	ORCHARD PL	END	ASH AVE	E	1	AC	2	255	32	8,160	49	48	52	0	Grind - ARAM - Overlay	$58,915
2030-31	PACFIC	17593	PACIFIC DR	OAK AVE	OLIVE AVE	E	1	AC	2	700	32	22,400	43	59	28	13	Grind - AC Overlay	$157,248
2030-31	PACFIC	17600	PACIFIC DR	HILL AVE	ORANGETHORPE AVE	E	1	AC	2	425	32	13,600	27	59	14	27	Grind - AC Overlay	$95,472
2030-31	PACFIC	17604	PACIFIC DR	GAGE AVE	ROBERTA AVE	E	1	AC	2	470	32	15,040	58	71	26	3	Grind - AC Overlay	$105,581
2030-31	PACFIC	17606	PACIFIC DR	ROBERTA AVE	HOUSTON AVE	E	1	AC	2	465	32	14,880	86	17	59	24	Type II Slurry Seal	$31,992
2030-31	PAGEAV	17610	PAGE AVE	ROBERTA AVE	BROOKHURST RD	E	1	AC	2	1,362	32	26,880	44	55	45	0	Grind - AC Overlay	$188,698
2030-31	PAULAA	17790	PAULA AVE	WEST AVE	FLOWER AVE	E	1	AC	2	860	26	22,360	38	89	9	2	Grind - AC Overlay	$156,967
2030-31	PINEDR	17885	PINE DR	VALENCIA DR	ASH AVE	E	1	AC	2	555	32	17,760	72	68	32	0	Type II Slurry Seal	$38,184
2030-31	PINEDR	17890	PINE DR	OAK AVE	OLIVE AVE	E	1	AC	2	708	32	23,956	30	60	12	28	Grind - AC Overlay	$168,171
2030-31	PINEDR	17900	PINE DR	HOUSTON AVE	ROBERTA AVE	E	1	AC	2	360	32	12,320	51	71	16	13	Grind - AC Overlay	$86,486
2030-31	PINEDR	17902	PINE DR	ROBERTA AVE	NORTH END	E	1	AC	2	150	32	4,800	52	59	16	25	Grind - AC Overlay	$33,696
2030-31	PORTER	18030	PORTER AVE	GILBERT ST	COURTNEY AVE	E	1	AC	2	1,290	32	41,280	44	76	21	3	Grind - AC Overlay	$289,786
2030-31	PORTER	18040	PORTER AVE	LEE AVE	END	E	1	AC	2	1,280	32	40,960	27	52	43	5	Grind - AC Overlay	$287,539
2030-31	PORTER	18050	PORTER AVE	ORCHARD AVE	CITRUS AVE	E	1	AC	2	540	32	17,280	39	87	13	0	Grind - AC Overlay	$121,306
2030-31	PRTCRD	18195	PRITCHARD AVE	VALENCIA DR	OAK AVE	E	1	AC	2	848	32	27,136	64	35	55	10	Grind - AC Overlay	$190,495
2030-31	ROBRTA	18640	ROBERTA AVE	BROOKHURST RD	PACIFIC DR	E	1	AC	2	705	32	22,900	67	77	23	0	Grind - AC Overlay	$160,758
2030-31	ROBRTA	18650	ROBERTA AVE	EADINGTON DR	BASQUE AVE	E	1	AC	2	965	32	30,880	87	42	29	29	Type II Slurry Seal	$66,392
2030-31	ROBRTA	18655	ROBERTA AVE	BASQUE AVE	ORCHARD AVE	E	1	AC	2	915	32	29,280	37	73	23	4	Grind - AC Overlay	$205,546
2030-31	SIMIPL	19510	SIMI PL	END	BAKER AVE	E	1	AC	2	160	32	5,120	26	89	11	0	Grind - AC Overlay	$35,942
2030-31	SOGATE	19630	SOUTHGATE AVE	CEDAR AVE	BROOKHURST AVE	E	1	AC	2	1,060	32	33,920	37	73	21	6	Grind - AC Overlay	$238,118

FY	BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Recommendations	Total $
2030-31	SOGATE	19635	SOUTHGATE AVE	BROOKHURST AVE	PACIFIC DR	E	1	AC	2	1,145	32	36,640	82	0	100	0	Type II Slurry Seal	$78,776
2030-31	SOGATE	19640	SOUTHGATE AVE	PACIFIC DR	BASQUE AVE	E	1	AC	2	1,010	32	32,320	84	30	61	9	Type II Slurry Seal	$69,488
2030-31	WESTAV	21130	WEST AVE	PINE DR	END	E	1	AC	2	580	32	18,560	76	65	25	10	Type II Slurry Seal	$39,904
2030-31	WESTAV	21140	WEST AVE	COURTNEY AVE	BROOKHURST RD	E	1	AC	2	1,295	32	41,440	34	74	14	12	Grind - AC Overlay	$290,909
2030-31	WESTAV	21160	WEST AVE	BASQUE AVE	LEE AVE	E	1	AC	2	685	32	21,920	30	58	42	0	Grind - AC Overlay	$153,878
2030-31	WESTAV	21170	WEST AVE	END	EUCLID	E	1	AC	2	620	32	19,840	75	65	26	9	Type II Slurry Seal	$42,656
2030-31	WESTAV	50040	WEST AVE	PRITCHARD AVE	JENSEN WAY	E	1	AC	2	855	32	27,360	79	34	66	0	Type II Slurry Seal	$58,824
2030-31	WESTAV	50050	WEST AVE	JENSEN WAY	GILBERT ST	E	1	AC	2	580	32	18,560	48	51	49	0	Grind - AC Overlay	$130,291
2030-31	WOODCR	21515	WOODCREST AVE	EADINGTON AVE	BASQUE AVE	E	1	AC	2	985	32	31,520	84	0	100	0	Type II Slurry Seal	$67,768
2030-31	WOODCR	21525	WOODCREST AVE	CITRUS	ORANGE AVE	E	1	AC	2	370	32	11,840	74	36	49	15	Type II Slurry Seal	$25,456
																		$6,527,643
2031-32	ADAMS	5090	ADAMS AVENUE	KNEPP AVE	PORTER AVE	E	2	AC	2	850	32	27,200	71	64	36	0	Type II Slurry Seal	$60,928
2031-32	ASHAVE	10140	ASH AVE	WOODS AVE	RICHMAN AVE	E	2	AC	2	1,196	32	38,272	69	82	18	0	Type II Slurry Seal	$85,729
2031-32	DELMON	12310	DEL MONTE WEST	RICHMAN AVE	EL DORADO DR	E	2	AC	2	330	32	10,560	87	0	100	0	Type II Slurry Seal	$23,654
2031-32	DELMON	12315	DEL MONTE WEST	EL DORADO DR	FORD AVE	E	2	AC	2	491	32	15,712	37	36	63	1	Grind - ARAM - Overlay	$117,997
2031-32	DRAKE	12550	DRAKE AVE	CHAPMAN AVE	COMMONWEALTH AVE	E	2	AC	2	1,228	32	39,296	74	72	28	0	Type II Slurry Seal	$88,023
2031-32	ELDORA	12690	EL DORADO DR	VALLEY VIEW DR	DEL MONTE WEST	E	2	AC	2	1,520	32	48,640	85	45	55	0	Type II Slurry Seal	$108,954
2031-32	ELMAVE	12871	ELM AVE	WASHINGTON AVE	WOODS AVE	E	2	AC	2	261	32	8,352	87	0	100	0	Type II Slurry Seal	$18,708
2031-32	GLNHVN	13580	GLENHAVEN AVE	VALLEY VIEW DR	S END	E	2	AC	2	625	32	20,000	70	67	19	14	Type II Slurry Seal	$44,800
2031-32	HIGLND	14400	HIGHLAND AVE	TRUSLOW AVE	VALENCIA DR	E	2	AC	3	410	40	16,400	79	38	62	0	Type II Slurry Seal	$36,736
2031-32	HILLAV	14500	HILL AVE	RICHMAN AVE	HIGHLAND AVE	E	2	AC	2	1,280	32	40,960	71	79	21	0	Type II Slurry Seal	$91,750
2031-32	HOUSTN	14720	HOUSTON AVE	LOMBARD DR	E END	E	2	AC	2	1,265	32	40,480	82	36	64	0	Type II Slurry Seal	$90,675
2031-32	HOUSTN	14725	HOUSTON AVE	W END	HARBOR BL	E	2	AC	2	515	32	16,480	77	29	64	7	Type II Slurry Seal	$36,915
2031-32	JEFRSN	14860	JEFFERSON AVE	END	COMMONWEALTH AVE	E	2	AC	2	170	32	5,440	76	38	62	0	Type II Slurry Seal	$12,186
2031-32	KNEPP	15100	KNEPP AVE	RICHMAN AVE	HIGHLAND AVE	E	2	AC	2	1,280	32	40,960	73	69	31	0	Type II Slurry Seal	$91,750
2031-32	MALDEN	16195	MALDEN AVE	CHAPMAN AVE	COMMONWEALTH AVE	E	2	AC	2	1,260	32	40,320	69	0	100	0	Type II Slurry Seal	$90,317
2031-32	MALVEA	16226	MALVERN AVE	RICHMAN AVE	MALDEN AVE	E	2	AC	2	2,015	36	72,540	82	0	100	0	Type II Slurry Seal	$162,490
2031-32	MALVEA	16230	MALVERN AVE	MALDEN AVE	HARBOR BLVD	E	2	AC	2	620	36	22,320	87	0	100	0	Type II Slurry Seal	$49,997
2031-32	MOTMVS	16870	MONTE MAR VISTA DR	END	WOODS AVE	E	2	AC	2	145	28	4,060	84	0	79	21	Type II Slurry Seal	$9,094
2031-32	PORTER	18060	PORTER AVE	ADAMS AVE	WASHINGTON AVE	E	2	AC	2	360	32	11,520	62	77	23	0	Grind - AC Overlay	$84,096
2031-32	PORTER	18070	PORTER AVE	WOODS AVE	HIGHLAND AVE	E	2	AC	2	2,435	32	77,920	29	73	18	9	Grind - AC Overlay	$568,816
2031-32	RICHMN	18500	RICHMAN AVE	VALLEY VIEW DR	UNION AVE	E	2	AC	2	1,335	32	42,720	70	36	64	0	Type II Slurry Seal	$95,693
2031-32	RICHMN	18510	RICHMAN AVE	CHAPMAN AVE	COMMONWEALTH AVE	E	2	AC	2	1,225	32	39,200	87	0	100	0	Type II Slurry Seal	$87,808
2031-32	RICHMN	18520	RICHMAN AVE	COMMONWEALTH AVE	END	E	2	AC	2	570	32	18,240	86	0	100	0	Type II Slurry Seal	$40,858
2031-32	RICHMN	18526	RICHMAN AVE	ASH AVE	ELM AVE	E	2	AC	2	265	32	8,480	82	55	45	0	Type II Slurry Seal	$18,995
2031-32	RICHMN	18530	RICHMAN AVE	ELM AVE	ORANGETHORPE AVE	E	2	AC	2	1,660	32	53,120	60	71	28	1	Grind - AC Overlay	$387,776
2031-32	ROBRTA	18675	ROBERTA AVE	RICHMAN AVE	MAXZIM AVE	E	2	AC	2	550	26	14,300	84	0	100	0	Type II Slurry Seal	$32,032
2031-32	ROOSVT	18800	ROOSEVELT AVE	CHAPMAN AVE	S END	E	2	AC	2	280	26	7,280	29	89	11	0	Grind - AC Overlay	$53,144
2031-32	ROOSVT	18810	ROOSEVELT AVE	WILSHIRE AVE	COMMONWEALTH AVE	E	2	AC	2	665	32	21,280	57	67	33	0	Grind - AC Overlay	$155,344
2031-32	ROOSVT	18820	ROOSEVELT AVE	MAPLEWOOD AVE	WEST AVE	E	2	AC	2	375	32	12,801	26	85	15	0	Grind - AC Overlay	$93,447
2031-32	ROOSVT	18830	ROOSEVELT AVE	KNEPP AVE	SOUTHGATE AVE	E	2	AC	2	240	32	7,680	31	73	17	10	Grind - AC Overlay	$56,064
2031-32	ROSSLN	18940	ROSSLYNN AVE	JEFFERSON AVE	WASHINGTON AVE	E	2	AC	2	995	32	31,840	61	58	35	7	Grind - AC Overlay	$232,432
2031-32	ROSSLN	18950	ROSSLYNN AVE	WOODS AVE	RICHMAN AVE	E	2	AC	2	1,165	32	37,280	64	77	22	1	Grind - AC Overlay	$272,144
2031-32	SOGATE	19653	SOUTHGATE AVE	EUCLID AVE	JEFFERSON AVE	E	2	AC	2	495	32	15,840	38	74	23	3	Grind - AC Overlay	$115,632
2031-32	SOGATE	19656	SOUTHGATE AVE	ADAMS AVE	END	E	2	AC	2	125	32	4,000	73	64	36	0	Type II Slurry Seal	$8,960
2031-32	SOGATE	19660	SOUTHGATE AVE	WOODS AVE	RICHMAN AVE	E	2	AC	2	1,165	32	37,280	48	75	25	0	Grind - AC Overlay	$272,144
2031-32	SOGATE	19670	SOUTHGATE AVE	RICHMAN AVE	HIGHLAND AVE	E	2	AC	2	1,280	32	40,960	77	73	27	0	Type II Slurry Seal	$91,750
2031-32	TAMRCK	20060	TAMARACK DR	END	HILL AVE	E	2	AC	2	345	32	11,040	82	44	25	31	Type II Slurry Seal	$24,730
2031-32	TRUMAN	20310	TRUMAN AVE	N END	CHAPMAN AVE	E	2	AC	2	190	26	4,940	25	91	9	0	Grind - AC Overlay	$36,062
2031-32	TRUSLW	20325	TRUSLOW AVE	HIGHLAND AVE	HARBOR BL	E	2	AC	2	1,400	32	44,800	83	0	100	0	Type II Slurry Seal	$100,352
2031-32	UNION	20400	UNION AVE	GLENWOOD DR	WOODS AVE	E	2	AC	2	372	32	13,404	29	79	20	1	Grind - AC Overlay	$97,849
2031-32	UNION	20420	UNION AVE	VISTA VERDE DR	HARBOR BL	E	2	AC	2	1,045	32	33,440	47	83	17	0	Grind - AC Overlay	$244,112
2031-32	VALEND	20470	VALENCIA DR	HIGHLAND AVE	HARBOR BLVD	E	2	AC	2	1,260	32	40,320	77	29	71	0	Type II Slurry Seal	$90,317
2031-32	VISTA	20860	VISTA LN	VALLEY VIEW DR	FERN DR	E	2	AC	2	645	32	20,640	81	0	79	21	Type II Slurry Seal	$46,234
2031-32	WALNTA	20930	WALNUT AVE	RICHMAND AVE	HIGHLAND AVE	E	2	AC	2	1,300	32	41,600	71	74	26	0	Type II Slurry Seal	$93,184
2031-32	WASGTN	21070	WASHINGTON AVE	WEST AVE	ELM	E	2	AC	2	460	32	14,720	59	75	25	0	Grind - AC Overlay	$107,456
2031-32	WASGTN	21080	WASHINGTON AVE	KNEPP AVE	ORANGETHORPE AVE	E	2	AC	2	1,025	32	32,800	60	69	31	0	Grind - AC Overlay	$239,440
2031-32	WESTAV	21176	WEST AVE	ALLEY W/ ROOSEVELT	ROOSEVELT AVE	E	2	AC	2	103	32	3,405	48	76	24	0	Grind - AC Overlay	$24,857
2031-32	WESTAV	21180	WEST AVE	ADAMS AVE	WASHINGTON AVE	E	2	AC	2	391	32	12,512	72	63	37	0	Type II Slurry Seal	$28,027
2031-32	WESTAV	21190	WEST AVE	WOODS AVE	FORD AVE	E	2	AC	2	2,125	32	68,000	46	82	18	0	Grind - AC Overlay	$496,400
2031-32	WHTNGA	21240	WHITING AVE	FORD AVE	HIGHLAND AVE	E	2	AC	2	625	32	20,000	87	0	100	0	Type II Slurry Seal	$44,800
2031-32	WLMSON	21320	WILLIAMSON AVE	EUCLID ST	WOODS AVE	E	2	AC	2	1,290	32	41,280	27	89	11	0	Grind - AC Overlay	$301,344
2031-32	WLMSON	21335	WILLIAMSON AVE	CHESTNUT PL	RICHMAN AVE	E	2	AC	2	542	35	18,970	78	51	49	0	Type II Slurry Seal	$42,493
2031-32	WOODCR	21540	WOODCREST AVE	END	RICHMAN AVE	E	2	AC	2	295	32	9,440	83	58	42	0	Type II Slurry Seal	$21,146
2031-32	WOODSA	21560	WOODS AVE	GRANDVIEW AVE	CHAPMAN AVE	E	2	AC	2	775	32	24,800	87	0	94	6	Type II Slurry Seal	$55,552
2031-32	WOODSA	21570	WOODS AVE	CHAPMAN AVE	COMMONWEALTH AVE	E	2	AC	2	1,436	32	45,952	57	69	31	0	Grind - AC Overlay	$335,450
2031-32	WOODSA	21575	WOODS AVE	COMMONWEALTH	S END	E	2	AC	2	580	32	18,560	87	35	65	0	Type II Slurry Seal	$41,574
2031-32	WOODSA	21580	WOODS AVE	VALENCIA DR	ASH AVE	E	2	AC	2	605	32	19,360	29	86	11	3	Grind - AC Overlay	$141,328
2031-32	WOODSA	21586	WOODS AVE	ROSSLYNN AVE	ORANGETHROPE	E	2	AC	2	1,292	32	41,344	78	66	34	0	Type II Slurry Seal	$92,611
																		$6,593,155
2032-33	ACACIA	5000	ACACIA AVE	LADERA VISTA DR	RIDGEMONT CT	E	5	AC	2	596	36	33,840	86	0	86	14	Type II Slurry Seal	$78,847
2032-33	ASHBUR	10200	ASHBURN TERR	BREA BLVD	OAKMONT PL	E	5	AC	2	188	52	9,776	80	69	31	0	Type II Slurry Seal	$22,778
2032-33	BEECHW	10690	BEECHWOOD AVE	WILLOW AVE	WOODBINE AVE	E	5	AC	2	1,111	32	35,552	86	0	83	17	Type II Slurry Seal	$82,836

FY	BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	PCI	% Load	% Climate	% Other	Maint. / Rehab Recommendations	Total $
2032-33	BIRCH	10800	BIRCH PL	EL MIRADOR DR	END	E	5	AC	2	256	32	10,692	80	0	100	0	Type II Slurry Seal	$24,912
2032-33	BIRCH	10805	BIRCH PL	BEECHWOOD AVE	END	E	5	AC	2	380	32	12,160	84	0	50	50	Type II Slurry Seal	$28,333
2032-33	CANNON	11380	CANNON LN	LEMON ST	LUANNE AVE	E	5	AC	2	653	26	16,978	73	25	51	24	Type II Slurry Seal	$39,559
2032-33	CONCOR	11880	CONCORD AVE	OLD RIVER RD	END	E	5	AC	2	910	32	60,640	80	59	41	0	Type II Slurry Seal	$141,291
2032-33	DORTHL	12500	DOROTHY LN	LONGVIEW DR	RAYMOND AVE	E	5	AC	2	1,690	32	54,080	77	44	55	1	Type II Slurry Seal	$126,006
2032-33	DORTHL	12510	DOROTHY LN	RAYMOND AVE	FERNDALE AVE	E	5	AC	2	1,705	36	61,380	73	24	66	10	Type II Slurry Seal	$143,015
2032-33	DORTHL	12520	DOROTHY LN	ACACIA AVE	VICTORIA DR	E	5	AC	2	880	36	31,680	78	44	56	0	Type II Slurry Seal	$73,814
2032-33	DORTHL	12530	DOROTHY LN	VICTORIA DR	STATE COLLEGE BLVD	E	5	AC	3	1,745	37	64,565	79	28	55	17	Type II Slurry Seal	$150,436
2032-33	ELMIRA	12725	EL MIRADOR DR	BREA BLVD	HEMLOCK PL	E	5	AC	2	1,035	32	33,120	84	0	100	0	Type II Slurry Seal	$77,170
2032-33	ELMIRA	12730	EL MIRADOR DR	HEMLOCK PL	SPRUCE PL	E	5	AC	2	551	32	17,632	86	0	61	39	Type II Slurry Seal	$41,083
2032-33	ELMIRA	12735	EL MIRADOR DR	SPRUCE PL	END	E	5	AC	2	370	32	11,840	82	0	100	0	Type II Slurry Seal	$27,587
2032-33	EVRGRN	13020	EVERGREEN AVE	SEQUOIA AVE	LAUREL AVE	E	5	AC	2	1,300	32	41,600	82	0	100	0	Type II Slurry Seal	$96,928
2032-33	EVRGRN	13030	EVERGREEN AVE	LAUREL AVE	LARK ELLEN DR	E	5	AC	2	1,110	32	35,520	73	42	43	15	Type II Slurry Seal	$82,762
2032-33	FRANCS	13360	FRANCES AVE	SKYLINE DR	CANNON LN	E	5	AC	2	1,150	27	31,050	71	7	45	48	Type II Slurry Seal	$72,347
2032-33	FRANCS	50010	FRANCES AVE	SKYLINE DR	N END	E	5	AC	2	118	32	3,776	87	0	100	0	Type II Slurry Seal	$8,798
2032-33	HRMNYL	14040	HARMONY LN	END	LINCOLN AVE	E	5	AC	2	1,235	32	39,520	74	58	42	0	Type II Slurry Seal	$92,082
2032-33	HRMNYL	14050	HARMONY LN	LINCOLN AVE	STANFORD AVE	E	5	AC	2	830	32	26,560	69	36	63	1	Type II Slurry Seal	$61,885
2032-33	HEMLCK	14220	HEMLOCK PL	EL MIRADOR DR	ROLLING HILLS DR	E	5	AC	2	650	32	20,800	76	0	98	2	Type II Slurry Seal	$48,464
2032-33	HOLYDL	14580	HOLLYDALE DR	END	MIRARMAR DR	E	5	AC	2	1,020	32	32,640	72	8	33	59	Type II Slurry Seal	$76,051
2032-33	HOLYOK	14610	HOLLYOAK DR	BASTANCHURY RD	END	E	5	AC	2	1,105	32	35,360	79	35	46	19	Type II Slurry Seal	$82,389
2032-33	KNSGTN	14995	KENSINGTON DR	MELODY LN	END	E	5	AC	2	670	32	21,440	83	0	83	17	Type II Slurry Seal	$49,955
2032-33	KNWOOD	15000	KENWOOD PL	END	RAYMOND AVE	E	5	AC	2	260	32	8,320	48	43	56	1	Grind - ARAM - Overlay	$64,979
2032-33	KROEGR	15125	KROEGER AVE	MIRAMAR PL	MELODY LN	E	5	AC	2	892	32	28,544	40	50	50	0	Grind - ARAM - Overlay	$222,929
2032-33	LADRVS	15240	LADERA VISTA DR	ACACIA AVE	LADERA VISTA PL	E	5	AC	2	2,640	32	84,480	74	74	25	1	Type II Slurry Seal	$196,838
2032-33	LRKELN	15415	LARK ELLEN DR	EVERGREEN AVE	PONDEROSA AVE	E	5	AC	2	309	32	9,888	85	0	100	0	Type II Slurry Seal	$23,039
2032-33	LRKELN	15425	LARK ELLEN DR	PONDEROSA AVE	EVERGREEN AVE	E	5	AC	2	1,006	32	32,192	69	0	61	39	Type II Slurry Seal	$75,007
2032-33	LRKELN	15430	LARK ELLEN DR	EVERGREEN AVE	STATE COLLEGE BLVD	E	5	AC	2	1,430	32	45,760	74	26	62	12	Type II Slurry Seal	$106,621
2032-33	LAUREL	15630	LAUREL AVE	LARK ELLEN DR	MAPLE AVE	E	5	AC	2	575	32	18,400	87	0	100	0	Type II Slurry Seal	$42,872
2032-33	LAUREL	15635	LAUREL AVE	NORTHERN CITY LIMIT	LARK ELLEN DR	E	5	AC	2	245	32	7,840	82	16	84	0	Type II Slurry Seal	$18,267
2032-33	LIMEAV	15770	LIME AVE	END	SANDALWOOD AVE	E	5	AC	2	615	32	19,680	80	0	100	0	Type II Slurry Seal	$45,854
2032-33	LINCOL	15780	LINCOLN AVE	END	MELODY LN	E	5	AC	2	553	28	15,484	62	33	67	0	Cape Seal	$46,607
2032-33	LUANNE	16100	LUANNE AVE	SKYLINE DR	CANNON LN	E	5	AC	2	1,185	28	33,180	74	29	41	30	Type II Slurry Seal	$77,309
2032-33	MAPLE	16275	MAPLE AVE	ROLLING HILLS DR	END	E	5	AC	2	980	32	31,360	67	25	74	1	Cape Seal	$94,394
2032-33	MAURNE	16440	MAURINE PL	LINDENDALE AVE	END	E	5	AC	2	220	32	7,040	62	29	71	0	Cape Seal	$21,190
2032-33	MEADOW	16530	MEADOW LN	END	SYCAMORE AVE	E	5	AC	2	405	32	12,960	72	72	28	0	Type II Slurry Seal	$30,197
2032-33	MELODY	16560	MELODY LN	LINCOLN AVE	STANFORD AVE	E	5	AC	2	790	32	25,280	73	32	44	24	Type II Slurry Seal	$58,902
2032-33	MIMOSA	16730	MIMOSA PL	SEQUIOA AVE	END	E	5	AC	2	130	32	4,160	86	0	100	0	Type II Slurry Seal	$9,693
2032-33	MRMARD	16780	MIRAMAR DR	LONGVIEW DR	VALLE VISTA DR	E	5	AC	2	660	32	21,120	80	10	90	0	Type II Slurry Seal	$49,210
2032-33	MNTVWP	16945	MOUNTAIN VIEW PL	HALE AVE	FULLERTON CREEK DR	E	5	AC	2	2,330	32	74,560	64	37	60	3	Cape Seal	$224,426
2032-33	OLDCRK	17350	OLD CREEK LN	VICTORIA DR	SYCAMORE AVE	E	5	AC	2	380	32	12,160	76	0	28	72	Type II Slurry Seal	$28,333
2032-33	PONDRS	18000	PONDEROSA AVE	ROLLING HILLS DR	EVERGREEN AVE	E	5	AC	2	821	32	26,272	87	0	100	0	Type II Slurry Seal	$61,214
2032-33	PONDRS	18005	PONDEROSA AVE	EVERGREEN AVE	LARK ELLEN DR	E	5	AC	2	1,637	32	52,384	84	71	29	0	Type II Slurry Seal	$122,055
2032-33	RANCH	18310	RANCH RD	CONCORD AVE	STATE COLLEGE BLVD	E	5	AC	2	145	32	4,640	83	38	62	0	Type II Slurry Seal	$10,811
2032-33	RAYMOA	18370	RAYMOND AVE	N END	SMOKEWOOD AVE	E	5	AC	2	170	32	5,440	38	33	67	0	Grind - ARAM - Overlay	$42,486
2032-33	RIDGTP	18570	RIDGETOP LN	END	SKYLINE DR	E	5	AC	2	1,025	32	32,800	87	0	94	6	Type II Slurry Seal	$76,424
2032-33	ROLLHL	18740	ROLLING HILLS DR	SEQUOIA AVE	MAPLE AVE	E	5	AC	3	848	60	50,880	80	20	80	0	Type II Slurry Seal	$118,550
2032-33	ROLLHL	18745	ROLLING HILLS DR	MAPLE AVE	MERLIN AVE	E	5	AC	3	2,180	60	130,800	66	9	91	0	Cape Seal	$393,708
2032-33	ROLLHL	18750	ROLLING HILLS DR	MERLIN AVE	ST COLLEGE BL	E	5	AC	3	925	60	55,500	68	19	74	7	Type II Slurry Seal	$129,315
2032-33	SEQUOA	19390	SEQUOIA AVE	PONDEROSA AVE	ROLLING HILLS DR	E	5	AC	2	1,174	32	37,568	81	0	100	0	Type II Slurry Seal	$87,533
2032-33	SKYLND	19540	SKYLINE DR	VIRGINIA RD	LUANNE AVE	E	5	AC	2	885	26	23,010	68	33	57	10	Type II Slurry Seal	$53,613
2032-33	SKYLND	19545	SKYLINE DR	LUANNE AVE	LONGVIEW DR	E	5	AC	2	990	32	31,680	70	59	41	0	Type II Slurry Seal	$73,814
2032-33	SKYLND	19580	SKYLINE DR	MIRAMAR DR	SORRENTO PL	E	5	AC	2	890	26	23,140	68	74	26	0	Type II Slurry Seal	$53,916
2032-33	SKYLND	19585	SKYLINE DR	SORRENTO PL	ACACIA AVE	E	5	AC	2	1,205	32	38,560	70	38	47	15	Type II Slurry Seal	$89,845
2032-33	SMKWDA	19610	SMOKEWOOD AVE	PANORAMA RD	S END	E	5	AC	2	975	32	31,200	28	52	48	0	Grind - AC Overlay	$236,808
2032-33	SPRUCE	19720	SPRUCE PL	EL MIRARDOR DR	END	E	5	AC	2	245	32	7,840	82	0	71	29	Type II Slurry Seal	$18,267
2032-33	SPRUCE	19730	SPRUCE PL	END	BEECHWOOD AVE	E	5	AC	2	390	32	12,480	79	0	35	65	Type II Slurry Seal	$29,078
2032-33	STANFD	19740	STANFORD AVE	VIRGINIA RD	DOROTHY LN	E	5	AC	2	855	32	27,360	60	47	53	0	Grind - AC Overlay	$207,662
2032-33	SYCMRE	20005	SYCAMORE AVE	HALE AVE	FULLERTON CREEK DR	E	5	AC	2	135	32	4,320	45	33	43	24	Grind - AC Overlay	$32,789
2032-33	SYCMRE	20031	SYCAMORE AVE	BROOKDALE PL	END	E	5	AC	2	994	32	37,305	43	63	22	15	Grind - AC Overlay	$283,145
2032-33	TOUSAU	20270	TOUSSAU DR	LONGVIEW DR	VALLE VISTA DR	E	5	AC	2	980	32	31,360	72	44	55	1	Type II Slurry Seal	$73,069
2032-33	VALVIS	20550	VALLE VISTA DR	SKYLINE DR	LONGVIEW DR	E	5	AC	2	1,650	32	52,800	73	29	71	0	Type II Slurry Seal	$123,024
2032-33	VALVWD	50020	VALLEY VIEW DR	LEMON ST	HARBOR BLVD	E	5	AC	2	1,393	32	44,576	83	0	45	55	Type II Slurry Seal	$103,862
2032-33	VALWOD	20620	VALWOOD DR	LONGVIEW DR	END	E	5	AC	2	1,995	32	63,840	36	53	35	12	Grind - AC Overlay	$484,546
2032-33	VICTRD	20750	VICTORIA DR	OLD CREEK LN	DOROTHY LN	E	5	AC	2	1,330	32	42,560	38	77	23	0	Grind - AC Overlay	$323,030
2032-33	VIRGNA	20805	VIRGINIA RD	LUANNE AVE	SHEPPARD DR	E	5	AC	2	395	26	10,270	27	69	20	11	Grind - AC Overlay	$77,949
2032-33	VIRGNA	20810	VIRGINIA RD	LONGVIEW DR	VALLE VISTA DR	E	5	AC	2	915	32	29,280	77	26	73	1	Type II Slurry Seal	$68,222
2032-33	VIRGNA	20820	VIRGINIA RD	END	STANFORD AVE	E	5	AC	2	255	32	8,160	67	57	43	0	Grind - AC Overlay	$61,934
2032-33	VIRGNA	20830	VIRGINIA RD	RIEDEL AVE	END	E	5	AC	2	865	32	27,680	75	26	67	7	Type II Slurry Seal	$64,494
2032-33	VIRGNA	20840	VIRGINIA RD	VICTORIA DR	CONCORD AVE	E	5	AC	2	760	32	24,320	42	64	36	0	Grind - AC Overlay	$184,589
2032-33	WILSON	21450	WILSON AVE	MELODY LN	S END	E	5	AC	2	315	32	10,080	30	60	40	0	Grind - AC Overlay	$76,507
2032-33	WOODBN	21490	WOODBINE AVE	ROLLING HILLS DR	END	E	5	AC	2	805	32	25,760	87	0	61	39	Type II Slurry Seal	$60,021
																		$6,988,279

XII. APPENDIX B – COMPLETE STREET LISTING CURRENT CONDITIONS

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
		Arterials / Collectors (MPAH)																
ACACIA	3770	ACACIA AVE	CHAPMAN AVE	WILSHIRE AVE	B	4	AC	3	553	60	33,180	4/7/26	35	35	53	12	New Construction - Initial	1/1/82
ACACIA	3780	ACACIA AVE	WILSHIRE AVE	COMMONWEALTH AVE	B	4	AC	4	738	60	44,280	4/7/26	29	28	49	23	New Construction - Initial	1/1/82
ACACIA	3790	ACACIA AVE	COMMONWEALTH AVE	WALNUT AV	B	4	AC	3	719	60	43,140	4/7/26	64	52	34	14	Cold Mill and Overlay	1/1/18
ACACIA	3800	ACACIA AVE	WALNUT AVE	WALNUT AVE	B	4	AC	3	85	60	5,100	2/23/26	66	62	38	0	Cold Mill and Overlay	1/1/18
ACACIA	3810	ACACIA AVE	WALNUT AVE	VALENCIA DR	B	4	AC	3	565	60	33,900	4/7/26	65	45	54	1	Cold Mill and Overlay	1/1/18
ACACIA	3820	ACACIA AVE	VALENCIA DR	ROSSLYNN AVE	B	4	AC	3	1,037	60	62,220	2/24/26	61	59	41	0	Cold Mill and Overlay	1/1/18
ACACIA	3830	ACACIA AVE	ROSSLYNN AVE	KIMBERLY AVE	B	4	AC	3	328	60	19,680	2/24/26	43	62	38	0	Cold Mill and Overlay	1/1/18
ACACIA	3840	ACACIA AVE	KIMBERLY AVE	ORANGETHORPE AVE	B	4	AC	3	1,314	60	78,840	2/24/26	65	39	61	0	Cold Mill and Overlay	1/1/18
ACACIA	3850	ACACIA AVE	ORANGETHORPE AVE	DAWNS WY	B	4	AC	3	876	60	52,560	2/24/26	8	51	29	20	New Construction - Initial	1/1/80
ACACIA	3860	ACACIA AVE	DAWNS WY	CARBON CREEK CHANNEL	B	4	AC	3	496	60	29,760	2/24/26	21	51	44	5	New Construction - Initial	1/1/80
ASSOCR	4550	ASSOCIATED RD	IMPERIAL HWY (90)	ORANGE FWY (57)	B	4	AAC	5	1,470	60	88,200	11/13/25	100	0	0	0	Overlay - AC Structural	1/3/24
ASSOCR	4560	ASSOCIATED RD	ORANGE FWY (57)	ROLLING HILLS DR	B	5	AAC	5	1,467	60	88,020	11/13/25	100	0	0	0	Overlay - AC Structural	1/3/24
ASSOCR	4570	ASSOCIATED RD	ROLLING HILLS DR	CRAIG CIR	B	5	AC	5	1,060	60	63,600	11/13/25	81	0	100	0	Surface Treatment - Slurry Seal	10/4/23
ASSOCR	4620	ASSOCIATED RD	CRAIG CIR	BASTANCHURY RD	B	5	AC	5	2,800	60	168,000	11/13/25	88	18	82	0	Surface Treatment - Slurry Seal	10/5/23
ASSOCR	4630	ASSOCIATED RD	BASTANCHURY RD	WOODBRIAR CT	B	4	AAC	5	351	60	21,060	11/13/25	99	0	100	0	Overlay - AC Structural	8/4/23
ASSOCR	4640	ASSOCIATED RD	WOODBRIAR CT	NORTHCREEK LN	B	4	AAC	5	405	60	24,300	11/13/25	99	0	100	0	Overlay - AC Structural	8/4/23
ASSOCR	4650	ASSOCIATED RD	NORTHCREEK LN	YORBA LINDA BLVD	B	4	AAC	5	834	60	50,040	11/13/25	99	0	100	0	Overlay - AC Structural	8/4/23
BASTAR	1640	BASTANCHURY RD	MALVERN AVE	HILLSBORO PL	B	8	AC	5	773	60	46,380	5/16/26	68	46	32	22	New Construction - Initial	10/1/07
BASTAR	1650	BASTANCHURY RD	HILLSBORO PL	ADLENA PL	B	8	AC	5	256	60	15,360	5/16/26	74	36	64	0	New Construction - Initial	10/1/07
BASTAR	1660	BASTANCHURY RD	ADLENA PL	VALLEY VIEW DR	B	8	AC	4	1,650	60	99,000	4/13/26	66	36	61	3	New Construction - Initial	10/1/07
BASTAR	1670	BASTANCHURY RD	VALLEY VIEW DR	VALENCIA MESA DR	B	8	AC	5	378	60	22,680	5/11/26	75	12	62	26	New Construction - Initial	10/1/07
BASTAR	1680	BASTANCHURY RD	VALENCIA MESA DR	PARKS RD	B	8	AC	4	1,170	60	70,200	4/13/26	76	12	82	6	New Construction - Initial	10/1/07
BASTAR	1700	BASTANCHURY RD	PARKS RD	BASTANCHURY PL	B	8	AC	6	216	80	17,280	5/11/26	68	6	92	2	New Construction - Initial	5/1/02
BASTAR	1710	BASTANCHURY RD	BASTANCHURY PL	EUCLID ST	B	8	AAC	4	2,180	66	143,880	4/13/26	63	25	75	0	New Construction - Initial	5/1/02
BASTAR	1720	BASTANCHURY RD	EUCLID ST	HIGHLAND AVE	B	7	AC	6	2,425	66	160,050	12/18/25	96	0	29	71	New Construction - Initial	1/1/92
BASTAR	1730	BASTANCHURY RD	HIGHLAND AVE	MORELIA AVE	B	7	AC	6	956	76	72,656	12/18/25	94	62	38	0	New Construction - Initial	1/1/92
BASTAR	1740	BASTANCHURY RD	MORELIA AVE	LAGUNA RD	B	7	AC	6	930	76	70,680	12/18/25	83	38	62	0	New Construction - Initial	1/1/92
BASTAR	1750	BASTANCHURY RD	LAGUNA RD	HARBOR BLVD	B	7	AC	6	606	76	46,056	12/18/25	56	59	41	0	New Construction - Initial	1/1/92
BASTAR	1760	BASTANCHURY RD	HARBOR BLVD	BALBOA RD	B	7	AC	6	237	30	7,740	12/19/25	67	56	44	0	New Construction - Initial	1/1/80
BASTAR	1770	BASTANCHURY RD	BALBOA RD	ST JUDE EMPLOYEE ENTERANCE	B	6	AC	5	590	33	24,475	12/19/25	44	43	57	0	New Construction - Initial	1/1/80
BASTAR	1790	BASTANCHURY RD	SILVER PINE ST	PUENTE ST	B	6	AC	5	2,235	33	85,048	12/19/25	85	18	82	0	New Construction - Initial	1/1/80
BASTAR	1800	BASTANCHURY RD	PUENTE ST	BREA BLVD	B	6	AC	5	1,340	34	56,636	1/15/26	40	49	49	2	New Construction - Initial	1/1/97
BASTAR	1810	BASTANCHURY RD	BREA BLVD	THREEWOODS LN	B	5	AC	5	686	32	30,246	1/15/26	58	50	50	0	New Construction - Initial	1/1/97
BASTAR	1820	BASTANCHURY RD	THREEWOODS LN	PAYNE STEWART DR	B	5	AC	5	538	32	26,877	1/15/26	62	57	43	0	New Construction - Initial	1/1/97
BASTAR	1830	BASTANCHURY RD	PAYNE STEWART DR	ASHWOOD CIR	B	5	AC	5	1,085	33	42,993	5/18/26	62	20	60	20	New Construction - Initial	1/1/97
BASTAR	1850	BASTANCHURY RD	ASHWOOD CIR	STATE COLLEGE BLVD	B	5	AC	5	3,045	33	113,945	5/18/26	57	28	63	9	New Construction - Initial	1/1/97
BASTAR	1860	BASTANCHURY RD	STATE COLLEGE BLVD	EXCELSA DR	B	5	AC	5	636	80	50,880	11/13/25	61	13	87	0	New Construction - Initial	1/1/92
BASTAR	1870	BASTANCHURY RD	EXCELSA DR	HILLTOP CT	B	5	AC	4	372	80	29,760	11/13/25	56	18	82	0	New Construction - Initial	1/1/92
BASTAR	1880	BASTANCHURY RD	HILLTOP CT	MOUNTAIN RIDGE DR	B	5	AC	4	950	80	76,000	11/13/25	66	14	86	0	New Construction - Initial	1/1/92
BASTAR	1890	BASTANCHURY RD	HOLLYOAK DR	MOUNTAIN RIDGE DR	B	5	AC	4	146	60	8,760	11/13/25	64	11	89	0	New Construction - Initial	1/1/92
BASTAR	1900	BASTANCHURY RD	MOUNTAIN RIDGE DR	ASSOCIATED RD	B	5	AC	5	365	80	29,200	11/13/25	60	24	76	0	New Construction - Initial	1/1/92
BASTAR	1910	BASTANCHURY RD	ASSOCIATED RD	DEREK DR	B	5	AAC	4	1,300	60	78,000	11/13/25	53	8	92	0	New Construction - Initial	4/1/01
BASTAR	1920	BASTANCHURY RD	DEREK DR	HARTFORD AVE	B	4	AAC	4	1,850	60	111,000	11/13/25	54	0	100	0	New Construction - Initial	4/1/01
BASTAR	1930	BASTANCHURY RD	HARTFORD AVE	CAMBRIDGE AVE	B	4	AAC	5	269	80	21,520	11/13/25	56	0	100	0	New Construction - Initial	4/1/01
BASTAR	1940	BASTANCHURY RD	CAMBRIDGE AVE	GILMAN CIR	B	4	AAC	5	307	80	24,560	11/13/25	52	0	100	0	New Construction - Initial	4/1/01
BASTAR	50210	BASTANCHURY RD	STATE COLLEGE BLVD	ASHWOOD CIR	B	5	AC	5	3,045	33	116,606	5/11/26	59	42	39	19	New Construction - Initial	1/1/97
BASTAR	50220	BASTANCHURY RD	ASHWOOD CIR	PAYNE STEWART DR	B	5	AC	5	1,085	32	40,625	5/18/26	73	10	71	19	New Construction - Initial	1/1/97
BASTAR	50230	BASTANCHURY RD	PAYNE STEWART DR	THREEWOODS LN	B	5	AC	5	586	32	20,085	11/20/25	47	53	37	10	New Construction - Initial	1/1/97
BASTAR	50240	BASTANCHURY RD	THREEWOODS LN	BREA BLVD	B	5	AC	5	686	32	30,250	11/20/25	41	32	36	32	New Construction - Initial	1/1/97
BASTAR	50250	BASTANCHURY RD	CCPUENTE ST	CCBREA BLVD	B	5	AC	5	1,340	34	51,475	4/7/26	69	45	21	34	New Construction - Initial	1/1/97
BASTAR	50260	BASTANCHURY RD	PUENTE ST	FAIRWAY ISLES DR	B	5	AC	5	2,235	33	82,300	4/7/26	68	57	23	20	New Construction - Initial	1/1/80
BASTAR	50270	BASTANCHURY RD	FAIRWAY ISLES DR	PVMT CHNGE (1200' E/ BALBOA RD)	B	5	AC	5	1,330	32	42,560	4/7/26	58	48	29	23	New Construction - Initial	1/1/80
BASTAR	50280	BASTANCHURY RD	PVMT CHNGE (1200' E/ BALBOA RD)	BALBOA RD	B	5	AC	5	1,239	24	30,479	4/7/26	50	12	39	49	New Construction - Initial	1/1/80
BASTAR	50290	BASTANCHURY RD	BALBOA RD	HARBOR BLVD	B	5	AC	6	210	35	12,645	5/18/26	57	14	39	47	New Construction - Initial	1/1/80
BASTAR	50300	BASTANCHURY RD	ST JUDE EMPLOYEE ENTERANCE	PVMT CHNGE (600' E/ ST JUDE)	B	5	AC	5	480	30	14,410	1/15/26	29	72	18	10	New Construction - Initial	1/1/80
BASTAR	50310	BASTANCHURY RD	PVMT CHNGE (600' E/ ST JUDE)	SILVER PINE ST	B	5	AC	5	1,476	32	54,598	12/19/25	78	44	56	0	New Construction - Initial	1/1/80
BERKEA	3540	BERKELEY AVE	HARBOR BLVD	LEMON ST	B	3	AC	4	1,343	60	80,580	12/26/25	66	19	80	1	MILL and OVERLAY	7/1/13
BERKEA	3550	BERKELEY AVE	LEMON ST	HORNET WY	B	3	AC	3	1,435	60	86,100	12/26/25	67	10	57	33	New Construction - Initial	1/1/80
BERKEA	3560	BERKELEY AVE	HORNET WY	BROOKDALE PL	B	3	AC	3	1,158	60	69,480	4/13/26	71	11	89	0	New Construction - Initial	1/1/80
BERKEA	3570	BERKELEY AVE	BROOKDALE PL	CHAPMAN AVE	B	3	AC	3	975	60	58,500	12/26/25	62	21	79	0	New Construction - Initial	1/1/80
BRADFA	4500	BRADFORD AVE	PALM DR	YORBA LINDA BLVD	B	4	AC	2	478	36	17,208	1/8/26	44	0	100	0	New Construction - Initial	1/1/80
BRADFA	4510	BRADFORD AVE	YORBA LINDA BLVD	TOPAZ LN	B	4	AAC	2	987	60	59,220	1/8/26	100	0	0	0	Overlay - AC Structural	3/4/24
BRADFA	4520	BRADFORD AVE	TOPAZ LN	QUARTZ LN	B	4	AC	2	981	60	58,860	1/8/26	100	0	0	0	New Construction - Initial	1/1/80
BREABL	3870	BREA BLVD	N CITY LIMITS	SAN ANTONIO AVE	B	6	AAC	5	800	75	60,000	4/7/26	73	52	36	12	Overlay - AC Structural	5/25/20
BREABL	3880	BREA BLVD	SAN ANTONIO AVE	ROLLING HILLS DR	B	6	AAC	5	514	75	38,550	4/7/26	78	47	33	20	Overlay - AC Structural	5/25/20
BREABL	3890	BREA BLVD	ROLLING HILLS DR	BEECHWOOD AVE	B	6	AAC	5	645	80	51,600	1/9/26	88	22	63	15	Overlay - AC Structural	5/25/20
BREABL	3900	BREA BLVD	BEECHWOOD AVE	BASTANCHURY RD	B	6	AAC	5	787	80	62,960	1/9/26	82	63	33	4	Overlay - AC Structural	5/25/20
BREABL	3910	BREA BLVD	BASTANCHURY RD	ASHBURN TER	B	6	AC	4	1,498	70	104,860	4/13/26	69	32	58	10	New Construction - Initial	1/1/89
BREABL	3920	BREA BLVD	ASHBURN TER	PANORAMA RD	B	5	AC	4	1,931	70	135,170	4/13/26	58	35	34	31	New Construction - Initial	1/1/89
BREABL	3930	BREA BLVD	PANORAMA RD	BARBARA BLVD	B	5	AC	4	777	80	62,160	1/15/26	67	40	39	21	New Construction - Initial	1/1/89

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
BREABL	3940	BREA BLVD	BARBARA BLVD	LONGVIEW DR	B	5	AC	4	844	80	67,520	1/15/26	69	34	66	0	New Construction - Initial	1/1/89
BREABL	3950	BREA BLVD	LONGVIEW DR	CLEAR SPRINGS DR	B	5	AC	4	256	80	20,480	1/15/26	72	39	54	7	New Construction - Initial	1/1/89
BREABL	3960	BREA BLVD	CLEAR SPRINGS DR	HARBOR BLVD	B	5	AC	4	2,632	75	197,400	1/15/26	53	50	33	17	New Construction - Initial	1/1/89
BROOKR	2590	BROOKHURST RD	COMMONWEALTH AVE	VALENCIA DR	B	7	AAC	4	1,213	60	72,780	12/12/25	97	0	100	0	Surface Reconstruction - AC	11/16/21
BROOKR	2600	BROOKHURST RD	VALENCIA DR	WEST AVE	B	1	AAC	4	486	60	29,160	12/12/25	97	0	100	0	Surface Reconstruction - AC	11/16/21
BROOKR	2610	BROOKHURST RD	WEST AVE	OAK AVE	B	1	AAC	4	358	60	21,480	12/12/25	97	0	100	0	Surface Reconstruction - AC	11/16/21
BROOKR	2620	BROOKHURST RD	OAK AVE	SOUTHGATE AVE	B	1	AAC	4	1,088	60	65,280	12/12/25	97	0	100	0	Surface Reconstruction - AC	11/16/21
BROOKR	2630	BROOKHURST RD	SOUTHGATE AVE	ORANGETHORPE AVE	B	1	AAC	5	782	60	46,920	12/12/25	96	0	100	0	Surface Reconstruction - AC	11/16/21
BROOKR	2640	BROOKHURST RD	ORANGETHORPE AVE	ROBERTA AVE	B	1	AC	5	1,104	60	66,240	12/12/25	72	80	20	0	New Construction - AC	10/1/10
BROOKR	2650	BROOKHURST RD	ROBERTA AVE	PVMNT CHNGE N/ RIVERSIDE FWY (91)	B	1	AAC	5	374	60	49,620	12/12/25	100	0	0	0	Overlay - AC Structural	7/1/23
BROOKR	2652	BROOKHURST RD	PVMNT CHNGE N/ RIVERSIDE FWY (91)	CITY LIMITS (91 FWY WB RAMPS)	B	1	AAC	5	255	60	16,840	12/12/25	100	0	100	0	Overlay - AC Structural	7/1/23
CHAPMA	1310	CHAPMAN AVE	WOODS AVE	DRAKE AVE	B	2	AC	4	731	60	43,860	3/2/26	43	71	29	0	New Construction - Initial	1/1/85
CHAPMA	1330	CHAPMAN AVE	DRAKE AVE	RICHMAN AVE	B	2	AC	4	652	60	39,120	4/24/26	51	72	22	6	New Construction - Initial	1/1/85
CHAPMA	1340	CHAPMAN AVE	RICHMAN AVE	FORD AVE	B	2	AC	4	668	60	40,080	3/2/26	58	54	43	3	New Construction - Initial	1/1/85
CHAPMA	1350	CHAPMAN AVE	FORD AVE	HIGHLAND AVE	B	2	AC	4	674	60	40,440	3/2/26	49	74	26	0	New Construction - Initial	1/1/85
CHAPMA	1360	CHAPMAN AVE	HIGHLAND AVE	MALDEN AVE	B	2	AC	4	662	60	39,720	3/2/26	53	66	33	1	New Construction - Initial	1/1/85
CHAPMA	1370	CHAPMAN AVE	MALDEN AVE	HARBOR BLVD	B	2	AC	5	675	60	40,500	3/2/26	45	52	29	19	New Construction - Initial	1/1/85
CHAPMA	1380	CHAPMAN AVE	HARBOR BLVD	POMONA AVE	A	3	AAC	5	672	60	40,320	3/2/26	39	50	23	27	New Construction - Initial	5/1/00
CHAPMA	1390	CHAPMAN AVE	POMONA AVE	LEMON ST	B	3	AAC	4	686	56	38,416	3/2/26	44	57	30	13	New Construction - Initial	5/1/00
CHAPMA	1400	CHAPMAN AVE	LEMON ST	NEWELL PL	B	3	AAC	5	1,004	60	60,240	5/15/26	61	59	28	13	New Construction - Initial	5/1/00
CHAPMA	1410	CHAPMAN AVE	NEWELL PL	BALCOM AVE	B	3	AAC	5	311	60	18,660	4/20/26	56	32	39	29	New Construction - Initial	5/1/00
CHAPMA	1420	CHAPMAN AVE	BALCOM AVE	BERKELEY AVE	B	3	AAC	5	389	60	23,340	2/24/26	47	49	51	0	New Construction - Initial	5/1/00
CHAPMA	1430	CHAPMAN AVE	BERKELEY AVE	PRINCETON AVE	B	3	AAC	5	340	60	20,400	5/16/26	70	0	100	0	New Construction - Initial	5/1/00
CHAPMA	1440	CHAPMAN AVE	PRINCETON AVE	YALE AV	B	3	AC	5	401	60	24,060	4/20/26	70	3	97	0	New Construction - Initial	1/1/80
CHAPMA	1450	CHAPMAN AVE	YALE AVE	YALE AVE	B	3	AAC	5	109	60	6,540	5/15/26	76	0	99	1	New Construction - Initial	5/1/00
CHAPMA	1460	CHAPMAN AVE	YALE AVE	LINCOLN AVE	B	3	AAC	5	216	60	12,960	5/15/26	77	0	100	0	New Construction - Initial	5/1/00
CHAPMA	1470	CHAPMAN AVE	LINCOLN AVE	CORNELL AVE	B	3	AC	5	270	60	16,200	5/15/26	68	32	68	0	New Construction - Initial	1/1/80
CHAPMA	1480	CHAPMAN AVE	CORNELL AVE	STANFORD AVE	B	3	AAC	5	388	60	23,280	5/15/26	71	11	85	4	New Construction - Initial	5/1/00
CHAPMA	1490	CHAPMAN AVE	STANFORD AVE	RAYMOND AVE	B	3	AC	4	501	60	30,060	4/7/26	68	19	79	2	New Construction - Initial	1/1/80
CHAPMA	1500	CHAPMAN AVE	RAYMOND AVE	VICTORIA DR	B	3	AC	5	802	60	48,120	5/15/26	66	46	37	17	New Construction - Initial	1/1/94
CHAPMA	1510	CHAPMAN AVE	VICTORIA DR	HART PL	B	3	AAC	5	563	60	33,780	5/15/26	74	0	75	25	6 in overlay	8/1/09
CHAPMA	1520	CHAPMAN AVE	HART PL	ANNIN AVE	B	3	AAC	4	255	60	15,300	4/7/26	82	0	100	0	6 in overlay	8/1/09
CHAPMA	1530	CHAPMAN AVE	ANNIN AVE	HARRINGTON DR	B	3	AAC	4	556	60	33,360	5/15/26	76	15	83	2	6 in overlay	8/1/09
CHAPMA	1540	CHAPMAN AVE	HARRINGTON DR	ACACIA AVE	B	3	AAC	5	467	60	28,020	5/16/26	67	68	26	6	6 in overlay	8/1/09
CHAPMA	1550	CHAPMAN AVE	ACACIA AVE	GORDON LN	B	4	AC	5	462	60	27,720	2/23/26	87	28	72	0	Cold Mill and Overlay	6/1/18
CHAPMA	1560	CHAPMAN AVE	GORDON LN	MOUNTAIN VIEW PL	B	4	AAC	5	225	60	13,500	2/23/26	84	0	66	34	Cold Mill and Overlay	6/1/18
CHAPMA	1570	CHAPMAN AVE	MOUNTAIN VIEW PL	LADERA VISTA DR	B	4	AC	5	710	60	42,600	2/23/26	82	45	55	0	Cold Mill and Overlay	6/1/18
CHAPMA	1580	CHAPMAN AVE	LADERA VISTA DR	STATE COLLEGE BLVD	B	4	AC	5	1,246	60	74,760	5/15/26	77	60	27	13	Cold Mill and Overlay	6/1/18
CHAPMA	1590	CHAPMAN AVE	STATE COLLEGE BLVD	PAVEMENT CHANGE	B	4	AC	5	845	60	50,700	1/8/26	89	23	72	5	Cold Mill and Overlay	6/1/18
CHAPMA	1600	CHAPMAN AVE	PAVEMENT CHANGE	COMMONWEALTH AVE	B	4	AC	5	765	60	45,900	1/8/26	81	23	77	0	New Construction - Initial	1/1/88
CHAPMA	1610	CHAPMAN AVE	COMMONWEALTH AVE	ORANGE FWY (57) ENTRANCE	B	4	AC	4	965	60	57,900	1/8/26	95	47	53	0	Cold Mill and Overlay	6/1/18
CHAPMA	1620	CHAPMAN AVE	ORANGE FWY (57) ENTRANCE	ORANGE FWY (57)	B	4	AC	6	386	74	28,564	1/8/26	97	0	100	0	Cold Mill and Overlay	6/1/18
CHAPMA	1630	CHAPMAN AVE	ORANGE FWY (57)	PLACENTIA AVE	B	4	AC	4	356	74	26,344	1/8/26	95	42	58	0	Cold Mill and Overlay	6/1/18
COMMOA	1000	COMMONWEALTH AVE	CORNELL AVE	STANFORD AVE	B	3	AC	4	512	60	30,720	2/6/26	98	0	0	100	Complete Reconstruction - AC	5/25/20
COMMOA	1010	COMMONWEALTH AVE	STANFORD AVE	RAYMOND AVE	B	3	AC	4	328	60	19,680	2/6/26	96	0	0	100	Complete Reconstruction - AC	5/25/20
COMMOA	1020	COMMONWEALTH AVE	RAYMOND AVE	MONTAGUE AVE	B	3	AC	4	799	60	47,940	2/6/26	96	0	0	100	Complete Reconstruction - AC	5/25/20
COMMOA	1030	COMMONWEALTH AVE	MONTAGUE AVE	ANIN AVE	B	3	AC	4	787	60	47,220	2/20/26	38	49	31	20	Crack Sealing - AC	4/1/10
COMMOA	1040	COMMONWEALTH AVE	ANIN AVE	HARRINGTON DR	B	3	AC	4	767	60	46,020	2/20/26	27	43	19	38	Crack Sealing - AC	4/1/10
COMMOA	1050	COMMONWEALTH AVE	HARRINGTON DR	ACACIA AVE	B	3	AC	4	293	60	17,580	2/20/26	22	61	27	12	Crack Sealing - AC	4/1/10
COMMOA	1060	COMMONWEALTH AVE	ACACIA AVE	MOUNTAIN VIEW PL	B	4	AC	4	808	60	48,480	2/20/26	63	47	30	23	Crack Sealing - AC	4/1/10
COMMOA	1070	COMMONWEALTH AVE	MOUNTAIN VIEW PL	LADERA VISTA DR	B	4	AC	4	658	60	39,480	2/20/26	61	56	44	0	Crack Sealing - AC	4/1/10
COMMOA	1080	COMMONWEALTH AVE	LADERA VISTA DR	LILLIE AVE	B	4	AC	4	474	60	28,440	2/20/26	36	66	27	7	Crack Sealing - AC	4/1/10
COMMOA	1090	COMMONWEALTH AVE	LILLIE AVE	LILLIE AVE	B	4	AC	4	212	60	12,720	2/20/26	13	59	41	0	Crack Sealing - AC	4/1/10
COMMOA	1100	COMMONWEALTH AVE	LILLIE AVE	STATE COLLEGE BLVD	B	4	AC	4	487	60	29,220	4/27/26	38	31	64	5	Crack Sealing - AC	4/1/10
COMMOA	1110	COMMONWEALTH AVE	STATE COLLEGE BLVD	MISSION DR	B	4	AC	4	446	60	26,760	2/13/26	23	48	52	0	New Construction - Initial	1/1/84
COMMOA	1120	COMMONWEALTH AVE	MISSION DR	SAN CARLOS DR	B	4	AC	4	874	60	52,440	2/13/26	21	48	38	14	New Construction - Initial	1/1/84
COMMOA	1130	COMMONWEALTH AVE	SAN CARLOS DR	BALFOUR AVE	B	4	AC	4	797	60	47,820	4/27/26	25	33	23	44	New Construction - Initial	1/1/84
COMMOA	1140	COMMONWEALTH AVE	BALFOUR AVE	CHAPMAN AVE	B	4	AC	4	341	60	20,460	2/13/26	14	42	33	25	New Construction - Initial	1/1/84
COMMOA	1150	COMMONWEALTH AVE	CHAPMAN AVE	COLLEGE PL	B	4	AC	4	515	60	30,900	1/8/26	78	23	50	27	New Construction - Initial	5/1/02
COMMOA	1160	COMMONWEALTH AVE	COLLEGE PL	NUTWOOD AVE	B	4	AC	4	871	65	56,615	1/8/26	74	6	48	46	New Construction - Initial	5/1/02
COMMOA	620	COMMONWEALTH AVE	DALE ST	EDWARD AVE	B	7	AC	5	1,456	60	87,360	1/23/26	68	8	88	4	New Construction - AC	11/1/11
COMMOA	630	COMMONWEALTH AVE	EDWARD AVE	MAGNOLIA AVE	B	7	AC	5	1,192	60	71,520	1/23/26	57	19	81	0	New Construction - AC	11/1/11
COMMOA	670	COMMONWEALTH AVE	MAGNOLIA AVE	THOMPSON AVE	B	7	AAC	5	449	60	26,940	5/16/26	53	56	35	9	6 in overlay	4/27/10
COMMOA	680	COMMONWEALTH AVE	THOMPSON AVE	PRITCHARD AVE	B	7	AC	5	396	60	23,760	5/16/26	52	58	41	1	New Construction - Initial	1/1/84
COMMOA	690	COMMONWEALTH AVE	PRITCHARD AVE	JENSEN WY	B	7	AAC	5	768	60	46,080	4/20/26	60	44	55	1	Overlay - AC Structural	8/1/22
COMMOA	710	COMMONWEALTH AVE	JENSEN WY	GILBERT AVE	B	7	AC	4	867	60	52,020	4/20/26	67	27	73	0	New Construction - Initial	1/1/84
COMMOA	720	COMMONWEALTH AVE	GILBERT AVE	LLOYD AVE	B	7	AC	5	1,545	60	92,700	4/20/26	66	4	96	0	New Construction - Initial	1/1/84
COMMOA	730	COMMONWEALTH AVE	LLOYD AVE	BROOKHURST RD	B	7	AC	5	1,122	60	67,320	4/20/26	62	0	93	7	New Construction - Initial	1/1/84
COMMOA	740	COMMONWEALTH AVE	BROOKHURST RD	PCC W/ BRIDGE	B	7	AC	4	925	60	48,276	5/16/26	73	11	89	0	New Construction - Initial	1/1/80
COMMOA	745	COMMONWEALTH AVE	PCC WEST OF BRIDGE	END PCC E/ BRIDGE (MARTHA PL)	B		PCC	0	686	60	35,160	3/3/26	80	60	25	15	New Construction - Initial	1/1/80
COMMOA	760	COMMONWEALTH AVE	PCC E/ BRIDGE (MARTHA PL)	BASQUE AVE	B	7	AAC	4	1,055	60	56,545	4/20/26	80	0	100	0	Overlay - AC Structural	4/3/26
COMMOA	770	COMMONWEALTH AVE	BASQUE AVE	ORCHARD AVE	B	7	AC	4	1,007	52	52,364	4/24/26	66	0	100	0	New Construction - Initial	1/1/86

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
COMMOA	780	COMMONWEALTH AVE	ORCHARD AVE	CITRUS AVE	B	7	AC	4	325	52	16,900	4/24/26	70	0	100	0	New Construction - Initial	1/1/84
COMMOA	790	COMMONWEALTH AVE	CITRUS AVE	WILLIAMSON AVE	B	7	AC	4	344	52	17,888	5/16/26	70	0	100	0	New Construction - Initial	1/1/86
COMMOA	800	COMMONWEALTH AVE	WILLIAMSON AVE	ORANGE AVE	B	7	AC	4	651	60	39,060	5/16/26	66	11	85	4	New Construction - Initial	1/1/86
COMMOA	810	COMMONWEALTH AVE	ORANGE AVE	EUCLID ST	B	7	AC	5	333	56	18,648	5/16/26	67	16	84	0	New Construction - Initial	1/1/86
COMMOA	820	COMMONWEALTH AVE	EUCLID ST	ROOSEVELT AVE	B	2	AC	5	333	52	17,316	5/16/26	66	0	100	0	New Construction - Initial	1/1/86
COMMOA	830	COMMONWEALTH AVE	ROOSEVELT AVE	WOODS AVE	B	2	AC	4	1,002	52	52,104	4/20/26	58	23	50	27	New Construction - Initial	1/1/86
COMMOA	840	COMMONWEALTH AVE	WOODS AVE	DRAKE AVE	B	2	AC	4	688	60	41,280	4/20/26	63	26	36	38	New Construction - Initial	1/1/86
COMMOA	850	COMMONWEALTH AVE	DRAKE AVE	RICHMAN AVE	B	2	AC	4	681	52	35,412	2/6/26	44	53	44	3	New Construction - Initial	1/1/86
COMMOA	860	COMMONWEALTH AVE	RICHMAN AVE	LIBRARY LN	B	2	AC	5	495	70	34,650	4/20/26	66	30	39	31	New Construction - Initial	1/1/86
COMMOA	870	COMMONWEALTH AVE	LIBRARY LN	HIGHLAND AVE	B	2	AC	5	829	70	58,030	2/6/26	63	38	62	0	MILL and OVERLAY	7/1/12
COMMOA	880	COMMONWEALTH AVE	HIGHLAND AVE	MALDEN AVE	B	2	AC	5	664	72	47,808	4/20/26	70	6	68	26	New Construction - Initial	1/1/86
COMMOA	890	COMMONWEALTH AVE	MALDEN AVE	HARBOR BLVD	B	2	AC	5	667	75	50,025	4/20/26	63	40	49	11	New Construction - Initial	1/1/86
COMMOA	900	COMMONWEALTH AVE	HARBOR BLVD	POMONA AVE	B	3	AC	5	683	72	49,176	5/15/26	58	43	39	18	New Construction - Initial	1/1/86
COMMOA	910	COMMONWEALTH AVE	POMONA AVE	LEMON ST	B	3	AC	4	678	72	48,816	5/15/26	60	46	38	16	New Construction - Initial	1/1/86
COMMOA	920	COMMONWEALTH AVE	LEMON ST	LAWRENCE AVE	B	3	AC	4	655	60	39,300	4/20/26	68	18	61	21	New Construction - Initial	1/1/86
COMMOA	930	COMMONWEALTH AVE	LAWRENCE AVE	BALCOM AVE	B	3	AC	4	655	68	44,540	2/6/26	52	38	62	0	Crack Sealing - AC	4/1/10
COMMOA	940	COMMONWEALTH AVE	BALCOM AVE	PRINCETON AVE	B	3	AC	4	775	60	46,500	2/6/26	96	0	0	100	Complete Reconstruction - AC	5/25/20
COMMOA	960	COMMONWEALTH AVE	PRINCETON AVE	CORNELL AVE	B	3	AC	4	980	60	58,800	2/6/26	99	0	0	100	Complete Reconstruction - AC	5/25/20
DALEST	2160	DALE ST	ARTESIA AVE	COMMONWEALTH AVE	B	7	AC	4	1,440	60	86,400	5/18/26	63	37	63	0	New Construction - Initial	1/1/80
DALEST	2180	DALE ST	COMMONWEALTH AVE	WHITAKER ST	B	7	AC	5	1,316	60	78,960	1/23/26	69	25	73	2	New Construction - Initial	1/1/80
DALEST	2200	DALE ST	WHITAKER ST	ASH AVE	B	1	AC	5	681	60	40,860	1/23/26	47	73	27	0	New Construction - Initial	1/1/80
DALEST	2210	DALE ST	ASH AVE	FLOWER AVE	B	1	AC	4	570	60	34,200	1/23/26	60	63	26	11	New Construction - Initial	1/1/80
DALEST	2220	DALE ST	FLOWER AVE	MONTANA AVE	B	1	AC	5	370	60	22,200	5/18/26	54	85	10	5	New Construction - Initial	1/1/80
DALEST	2230	DALE ST	MONTANA AVE	AUTO CENTER DR	B	1	AC	5	830	60	49,800	1/23/26	49	64	23	13	New Construction - Initial	1/1/80
EUCLIS	2740	EUCLID ST	N CITY LIMITS	LA SENDA DR	B	8	ACT	5	1,981	80	158,480	10/30/25	68	32	60	8	New Construction - Initial	1/1/90
EUCLIS	2750	EUCLID ST	LA SENDA DR	LAKEVIEW DR	B	8	AC	4	959	80	76,720	4/13/26	71	69	31	0	New Construction - Initial	1/1/90
EUCLIS	2760	EUCLID ST	LAKEVIEW DR	LAGUNA RD	B	8	AC	4	1,269	80	101,520	4/13/26	71	49	46	5	New Construction - Initial	1/1/90
EUCLIS	2770	EUCLID ST	LAGUNA RD	LAGUNA TER	B	8	AC	4	2,291	80	183,280	10/30/25	72	40	60	0	New Construction - Initial	1/1/90
EUCLIS	2780	EUCLID ST	LAGUNA TER	ROSECRANS AVE	B	8	AC	5	584	80	46,720	5/15/26	74	47	29	24	New Construction - Initial	1/1/90
EUCLIS	2790	EUCLID ST	ROSCRANS AVE	RR TRACKS S/ PASEO DORADO	B	8	AC	5	1,405	80	112,400	5/15/26	100	0	0	0	Complete Reconstruction - AC	4/3/26
EUCLIS	2800	EUCLID ST	RR TRACKS S/ PASEO DORADO	BASTANCHURY RD	B	8	AC	5	260	80	17,870	5/15/26	100	0	0	0	Complete Reconstruction - AC	4/3/26
EUCLIS	2810	EUCLID ST	BASTANCHURY RD	VALENCIA MESA DR	B	7	AAC	5	1,059	60	63,540	12/12/25	99	0	100	0	Overlay - AC Structural	10/1/22
EUCLIS	2820	EUCLID ST	VALENCIA MESA DR	RODEO DR	B	7	AAC	5	720	60	43,200	12/12/25	99	0	100	0	Overlay - AC Structural	10/1/22
EUCLIS	2830	EUCLID ST	RODEO DR	VALLEY VIEW DR	B	7	AAC	5	1,156	56	64,736	12/12/25	97	0	100	0	Overlay - AC Structural	10/1/22
EUCLIS	2840	EUCLID ST	VALLEY VIEW DR	FERN DR	B	7	AAC	5	700	60	42,000	12/12/25	99	0	100	0	Overlay - AC Structural	10/1/22
EUCLIS	2860	EUCLID ST	FERN DR	MALVERN AVE	B	7	AAC	5	1,565	60	93,900	12/12/25	91	35	65	0	Overlay - AC Structural	10/1/21
EUCLIS	2870	EUCLID ST	MALVERN AVE	CHAPMAN AVE	B	7	AAC	5	439	60	26,340	12/12/25	93	0	81	19	Overlay - AC Structural	12/2/21
EUCLIS	2880	EUCLID ST	CHAPMAN AVE	WILSHIRE AVE	B	7	AAC	5	603	60	36,180	12/12/25	90	0	100	0	Overlay - AC Structural	12/2/21
EUCLIS	2890	EUCLID ST	WILSHIRE AVE	COMMONWEALTH AVE	B	7	AAC	5	718	60	43,080	12/12/25	85	41	59	0	Overlay - AC Structural	12/2/21
EUCLIS	2900	EUCLID ST	COMMONWEALTH AVE	WILLIAMSON AVE	B	7	AAC	6	372	66	24,552	1/29/26	92	50	50	0	Overlay - AC Structural	12/2/21
EUCLIS	2910	EUCLID ST	WILLIAMSON AVE	AC	B	7	PCC	5	630	60	37,800	3/3/26	88	31	52	17	New Construction - Initial	1/1/80
EUCLIS	2915	EUCLID ST	PCC	VALENCIA DR	B	7	AAC	5	250	60	15,000	1/29/26	93	0	85	15	New Construction - Initial	5/7/01
EUCLIS	2920	EUCLID ST	VALENCIA DR	WINDFALL WY	B	2	AAC	5	1,048	60	62,880	1/30/26	55	51	49	0	New Construction - Initial	5/7/01
EUCLIS	2950	EUCLID ST	WINDFALL WY	HILL AVE	B	2	AAC	5	676	60	40,560	1/30/26	67	56	35	9	New Construction - Initial	5/7/01
EUCLIS	2960	EUCLID ST	HILL AVE	ORANGETHORPE AVE	B	2	AAC	5	879	60	52,740	1/30/26	49	43	45	12	New Construction - Initial	5/7/01
EUCLIS	2970	EUCLID ST	ORANGETHORPE AVE	BAKER AVE	B	2	AC	5	821	60	49,260	1/30/26	42	31	69	0	New Construction - UNSURFACED	10/1/11
EUCLIS	2980	EUCLID ST	BAKER AVE	RIVERSIDE FWY (91)	B	2	AC	4	1,030	48	49,440	5/18/26	59	34	49	17	New Construction - UNSURFACED	10/1/11
GILBES	2390	GILBERT ST	N CITY LIMITS	CASTLEWOOD DR	B	8	AC	2	1,891	45	85,095	10/30/25	94	0	6	94	Surface Treatment - Slurry Seal	6/1/24
GILBES	2400	GILBERT ST	CASTLEWOOD DR	OPEN SKY DR	B	8	AC	4	1,841	50	92,050	10/30/25	94	45	16	39	Surface Treatment - Slurry Seal	6/1/24
GILBES	2410	GILBERT ST	OPEN SKY DR	TRAILS DR	B	8	AC	4	307	50	15,350	10/30/25	91	0	76	24	Surface Treatment - Slurry Seal	6/1/24
GILBES	2420	GILBERT ST	TRAILS DR	COYOTE HILLS DR	B	8	AC	4	1,380	50	69,000	10/30/25	96	0	21	79	Surface Treatment - Slurry Seal	6/1/24
GILBES	2430	GILBERT ST	COYOTE HILLS DR	ROSECRANS AVE	B	8	AC	4	562	60	33,720	4/13/26	50	30	32	38	New Construction - Initial	1/1/80
GILBES	2440	GILBERT ST	ROSECRANS AVE	EL RANCHO VISTA	B	8	AC	5	500	80	40,000	4/13/26	74	0	76	24	New Construction - Initial	1/1/87
GILBES	2450	GILBERT ST	EL RANCHO VISTA	VIA INGRESO	B	8	AC	5	320	60	19,200	4/13/26	79	0	63	37	New Construction - Initial	1/1/80
GILBES	2460	GILBERT ST	VIA INGRESO	LOMA VERDE DR	B	8	AC	5	640	60	38,400	12/11/25	72	37	63	0	New Construction - Initial	1/1/87
GILBES	2470	GILBERT ST	LOMA VERDE DR	VIA MIRADA	B	8	ABR	5	234	60	14,040	12/11/25	74	26	74	0	New Construction - Initial	1/1/80
GILBES	2480	GILBERT ST	VIA MIRADA	CONEJO LN	A	8	AC	5	343	60	20,580	12/11/25	78	15	71	14	New Construction - Initial	1/1/80
GILBES	2490	GILBERT ST	CONEJO LN	LOMA ALTA DR	B	8	AC	5	638	60	38,280	12/11/25	67	44	55	1	New Construction - Initial	1/1/87
GILBES	2500	GILBERT ST	LOMA ALTA DR	PIONEER AVE	B	8	AC	5	307	60	18,420	4/13/26	75	44	53	3	New Construction - Initial	1/1/87
GILBES	2515	GILBERT ST	PIONEER AVE	DAPHNE PL	B	8	AC	5	655	60	39,300	12/11/25	72	38	62	0	New Construction - Initial	1/1/80
GILBES	2530	GILBERT ST	DAPHNE PL	HUGHES DR	B	8	AC	5	1,287	66	84,942	12/11/25	80	30	69	1	New Construction - Initial	1/1/81
GILBES	2541	GILBERT ST	HUGHES DR	WINDSONG WY	B	8	AC	5	321	60	19,260	12/11/25	59	36	32	32	New Construction - Initial	1/1/81
GILBES	2542	GILBERT ST	WINDSONG WY	BRAMBLE WY	B	8	AC	5	1,003	60	60,180	12/11/25	72	42	58	0	New Construction - Initial	1/1/81
GILBES	2543	GILBERT ST	BRAMBLE WY	MALVERN AVE	B	8	AC	5	619	60	37,140	12/11/25	65	64	36	0	New Construction - Initial	1/1/81
GILBES	2550	GILBERT ST	MALVERN AVE	MOORE AVE	B	8	AC	4	740	60	44,400	5/15/26	57	41	32	27	New Construction - Initial	1/1/86
GILBES	2560	GILBERT ST	MOORE AVE	RAYMER AVE	B	8	AC	5	788	60	47,280	12/11/25	37	59	25	16	New Construction - Initial	1/1/86
GILBES	2570	GILBERT ST	RAYMER AVE	PCC N/ ARTESIA AVE	B	8	AAC	4	295	60	18,245	4/13/26	65	62	38	0	New Construction - Initial	1/1/80
GILBES	2575	GILBERT ST	PCC N/ ARTESIA AVE	ARTESIA AVE	B		PCC	0	265	60	14,000	3/3/26	82	40	25	35	New Construction - Initial	1/1/17
GILBES	2580	GILBERT ST	ARTESIA AVE	COMMONWEALTH AVE	B	7	AC	5	752	60	51,385	12/11/25	60	65	35	0	New Construction - Initial	1/1/80
HARBOB	2990	HARBOR BLVD	LAMBERT RD	EDWARDS DR	B	6	AC	3	1,312	42	55,104	12/12/25	89	50	48	2	Complete Reconstruction - AC	6/1/18
HARBOB	2995	HARBOR BLVD	EDWARDS DR	IMPERIAL HWY (90)	B	6	AC	3	1,268	40	45,370	12/12/25	91	77	23	0	Complete Reconstruction - AC	8/1/18
HARBOB	3000	HARBOR BLVD	IMPERIAL HWY (90)	LAS RIENDAS DR	B	6	AC	5	993	80	79,440	12/19/25	83	39	61	0	New Construction - Initial	1/1/87

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
HARBOB	3010	HARBOR BLVD	LAS RIENDAS DR	LAS PALMAS DR	B	6	AC	5	1,075	80	86,000	12/19/25	84	0	100	0	New Construction - Initial	1/1/78
HARBOB	3020	HARBOR BLVD	LAS PALMAS DR	HERMOSA DR	B	6	AAC	4	961	64	61,504	12/19/25	75	57	43	0	New Construction - Initial	5/7/01
HARBOB	3030	HARBOR BLVD	HERMOSA DR	LA ENTRADA PL	B	6	AAC	4	1,024	80	81,920	12/19/25	70	53	25	22	New Construction - Initial	5/7/01
HARBOB	3040	HARBOR BLVD	LA ENTRADA PL	BASTANCHURY RD	B	6	AAC	5	4,074	80	325,920	12/19/25	71	72	28	0	New Construction - Initial	5/7/01
HARBOB	3050	HARBOR BLVD	BASTANCHURY RD	VALENCIA MESA DR	B	7	AC	6	817	66	53,922	11/6/25	87	18	82	0	New Construction - Initial	1/1/95
HARBOB	3060	HARBOR BLVD	VALENCIA MESA DR	BREA BLVD	B	7	AC	6	3,970	80	317,600	11/6/25	48	62	36	2	New Construction - Initial	1/1/95
HARBOB	3080	HARBOR BLVD	BREA BLVD	VALLEY VIEW DR	B	5	AC	5	685	60	41,100	5/4/26	64	47	40	13	New Construction - Initial	1/1/95
HARBOB	3090	HARBOR BLVD	VALLEY VIEW DR	BERKELEY AVE	B	3	AC	5	743	66	49,038	5/4/26	56	60	29	11	New Construction - Initial	1/1/95
HARBOB	3100	HARBOR BLVD	BERKELEY AVE	UNION AVE	B	3	AC	5	636	56	35,616	5/4/26	50	33	67	0	New Construction - UNSURFACED	6/1/10
HARBOB	3120	HARBOR BLVD	UNION AVE	CHAPMAN AVE	B	3	AC	5	1,283	56	71,848	5/4/26	54	30	61	9	New Construction - Initial	3/19/12
HARBOB	3160	HARBOR BLVD	CHAPMAN AVE	COMMONWEALTH AVE	B	3	AC	5	1,305	52	67,860	11/6/25	100	0	0	0	Surface Treatment - REAS	7/30/25
HARBOB	3200	HARBOR BLVD	COMMONWEALTH AVE	SANTA FE AVE	B	3	AC	5	335	59	19,765	1/30/26	88	44	39	17	New Construction - Initial	1/1/80
HARBOB	3210	HARBOR BLVD	SANTA FE AVE	TRUSLOW AVE	B	3	PCC	4	867	50	43,350	3/3/26	82	36	43	21	New Construction - Initial	1/1/80
HARBOB	3230	HARBOR BLVD	TRUSLOW AVE	VALENCIA DR	B	3	ABR	4	308	60	18,480	1/30/26	89	57	43	0	New Construction - Initial	1/1/80
HARBOB	3240	HARBOR BLVD	VALENCIA DR	ASH AVE	B	3	AC	5	374	60	22,440	4/27/26	70	53	38	9	New Construction - Initial	5/1/02
HARBOB	3250	HARBOR BLVD	ASH AVE	ELM AVE	B	3	AC	5	268	60	16,080	4/27/26	82	23	77	0	New Construction - Initial	5/1/02
HARBOB	3260	HARBOR BLVD	ELM AVE	ROSSLYNN AVE	B	3	AC	5	341	60	20,460	1/30/26	89	25	75	0	New Construction - Initial	5/1/02
HARBOB	3270	HARBOR BLVD	ROSSLYNN AVE	HILL AVE	B	3	AAC	5	893	60	53,580	1/30/26	75	37	63	0	New Construction - Initial	5/1/02
HARBOB	3300	HARBOR BLVD	HILL AVE	ORANGETHORPE AVE	B	3	AAC	5	570	78	44,460	2/5/26	60	51	49	0	New Construction - Initial	5/1/02
HARBOB	3310	HARBOR BLVD	ORANGETHORPE AVE	ORANGE FAIR MALL	B	3	AC	6	501	80	39,520	2/5/26	49	47	53	0	New Construction - Initial	7/1/07
HARBOB	3320	HARBOR BLVD	ORANGE FAIR MALL	ORANGEFAIR AVE	B	3	AC	6	599	80	42,190	2/5/26	62	30	70	0	New Construction - Initial	1/1/80
HARBOB	3330	HARBOR BLVD	ORANGEFAIR AVE	RIVERSIDE FWY (91)	B	3	AC	6	773	66	51,018	2/5/26	56	50	47	3	New Construction - Initial	7/1/07
IMPERH	4010	IMPERIAL HWY	HARBOR BLVD	BONITA PL	B	6	AC	4	1,684	66	111,144	10/30/25	97	0	0	100	New Construction - Initial	1/1/80
IMPERH	4020	IMPERIAL HWY	BONITA PL	PALM ST	B	6	AC	4	930	80	74,400	10/30/25	99	0	100	0	New Construction - Initial	1/1/80
IMPERH	4030	IMPERIAL HWY	PALM ST	GEMINI AVE	B	6	AC	5	881	80	70,480	10/30/25	99	0	100	0	New Construction - Initial	1/1/80
IMPERH	4040	IMPERIAL HWY	GEMINI AVE	PUENTE ST	B	6	AC	5	1,763	80	141,040	10/30/25	98	0	100	0	New Construction - Initial	1/1/80
KRAEMB	4990	KRAEMER BLVD	SATURN ST	S. CITY LIMIT	B	4	AC	5	1,095	60	65,700	12/30/25	92	0	100	0	New Construction - Initial	1/1/85
LAMBER	3970	LAMBERT RD	HARBOR BLVD	PALM ST	B	6	AC	3	2,582	30	77,460	12/11/25	75	56	44	0	Complete Reconstruction - AC	6/1/18
LEMONS	3350	LEMON ST	BERKELEY AVE	FULLERTON COLLEGE DR	B	3	AC	4	1,030	50	51,500	12/26/25	84	24	76	0	New Construction - Initial	5/1/07
LEMONS	3370	LEMON ST	FULLERTON COLLEGE DR	CHAPMAN AVE	B	3	AC	4	702	50	35,100	12/26/25	81	31	69	0	New Construction - Initial	5/1/07
LEMONS	3380	LEMON ST	CHAPMAN AVE	WHITING AVE	B	3	AC	5	213	60	12,780	4/20/26	60	66	28	6	New Construction - Initial	1/1/80
LEMONS	3390	LEMON ST	WHITING AVE	WILSHIRE AVE	B	3	AC	4	365	60	21,900	4/20/26	52	48	23	29	New Construction - Initial	1/1/97
LEMONS	3400	LEMON ST	WILSHIRE AVE	AMERIGE AVE	B	3	AC	5	365	60	21,900	2/5/26	50	60	40	0	New Construction - Initial	1/1/97
LEMONS	3410	LEMON ST	AMERIGE AVE	COMMONWEALTH AVE	B	3	AC	5	379	60	22,740	2/5/26	51	62	38	0	New Construction - Initial	1/1/97
LEMONS	3420	LEMON ST	COMMONWEALTH AVE	SANTA FE AVE	B	3	AC	5	379	60	22,740	5/15/26	86	0	81	19	New Construction - Initial	5/7/01
LEMONS	3430	LEMON ST	SANTA FE AVE	WALNUT WAY	B	3	PCC	4	736	48	35,328	3/3/26	65	73	21	6	New Construction - Initial	1/1/75
LEMONS	3440	LEMON ST	WALNUT WAY	VALENCIA DR	B	3	AC	4	392	60	23,520	2/5/26	77	57	43	0	New Construction - Initial	1/1/75
LEMONS	3470	LEMON ST	VALENCIA DR	ASH DR	B	3	AC	4	374	60	22,440	2/5/26	85	27	73	0	New Construction - Initial	5/7/00
LEMONS	3480	LEMON ST	ASH DR	FREEDOM AVE	B	3	AC	4	979	60	58,740	2/5/26	69	67	28	5	New Construction - Initial	5/7/00
LEMONS	3490	LEMON ST	FREEDOM AVE	LIBERTY AVE	B	3	AAC	5	561	60	33,660	2/5/26	70	18	82	0	6 in overlay	8/1/08
LEMONS	3500	LEMON ST	LIBERTY AVE	ORANGETHORPE AVE	B	3	AAC	5	547	60	32,820	2/5/26	63	5	94	1	6 in overlay	8/1/08
LEMONS	3510	LEMON ST	ORANGETHORPE AVE	ORANGEFAIR AVE	B	3	AC	5	1,153	60	69,180	2/5/26	57	27	55	18	New Construction - Initial	1/1/84
LEMONS	3530	LEMON ST	ORANGEFAIR AVE	RIVERSIDE FWY (91)	B	3	AC	4	700	65	45,500	5/18/26	63	50	40	10	New Construction - Initial	1/1/99
MADISA	4410	MADISON AVE	PLACENTIA AVE	E CITY LIMITS	B	4	AC	3	734	60	44,040	5/11/26	59	31	63	6	New Construction - Initial	1/1/80
MAGNOA	2250	MAGNOLIA AVE	COMMONWEALTH AVE	VALENCIA DR	B	7	AAC	4	1,340	60	80,400	4/20/26	53	37	58	5	6 in overlay	8/1/09
MAGNOA	2280	MAGNOLIA AVE	VALENCIA DR	FLOWER AVE	B	1	AAC	5	1,203	60	72,180	4/20/26	62	22	68	10	6 in overlay	8/1/09
MAGNOA	2330	MAGNOLIA AVE	FLOWER AVE	ORANGETHORPE AVE	B	1	AC	4	1,474	60	88,440	5/16/26	67	26	69	5	MILL and OVERLAY	7/1/13
MAGNOA	2370	MAGNOLIA AVE	ORANGETHORPE AVE	BRIDGE	B	1	AC	6	1,160	88	102,080	5/18/26	46	71	25	4	New Construction - Initial	1/1/99
MALVEA	1170	MALVERN AVE	W CITY LIMITS	BURNING TREE RD	B	8	AC	4	991	76	75,316	4/13/26	70	30	69	1	New Construction - Initial	1/1/86
MALVEA	1180	MALVERN AVE	BURNING TREE RD	SUNNY RIDGE DR	B	8	AC	4	1,264	76	96,064	5/16/26	66	51	41	8	New Construction - Initial	1/1/86
MALVEA	1190	MALVERN AVE	SUNNY RIDGE DR	GILBERT AVE	B	8	AC	5	566	79	44,714	5/16/26	70	31	64	5	New Construction - Initial	1/1/86
MALVEA	1200	MALVERN AVE	GILBERT AVE	BASTANCHURY RD	B	8	AC	4	2,932	60	175,920	2/12/26	59	79	21	0	New Construction - Initial	1/1/86
MALVEA	1210	MALVERN AVE	BASTANCHURY RD	ADLENA DR	B	7	AC	4	767	60	46,020	2/12/26	52	73	27	0	New Construction - Initial	1/1/81
MALVEA	1220	MALVERN AVE	ADLENA DR	BASQUE AVE	B	7	AC	4	1,423	60	85,380	2/12/26	48	65	31	4	New Construction - Initial	1/1/81
MALVEA	1230	MALVERN AVE	BASQUE AVE	STEPHENS AVE	B	7	AC	4	667	50	33,350	5/16/26	55	65	30	5	New Construction - Initial	1/1/96
MALVEA	1240	MALVERN AVE	STEPHENS AVE	BEVERLY DR	B	7	AC	4	534	50	26,700	2/12/26	55	49	36	15	New Construction - Initial	1/1/96
MALVEA	1250	MALVERN AVE	BEVERLY DR	WESLEY AVE	B	7	AC	4	360	50	18,000	2/12/26	52	67	33	0	New Construction - Initial	1/1/96
MALVEA	1260	MALVERN AVE	WESLEY AVE	BUENA VISTA DR	B	7	AC	4	769	50	38,450	2/12/26	55	49	44	7	New Construction - Initial	1/1/96
MALVEA	1270	MALVERN AVE	BUENAVISTA DR	EUCLID ST	B	7	AC	4	322	50	16,100	2/12/26	52	64	36	0	New Construction - Initial	1/1/96
MALVEA	1280	MALVERN AVE	EUCLID ST	CASA BLANCA DR	B	2	AC	5	238	60	14,280	3/2/26	43	69	31	0	New Construction - Initial	1/1/85
MALVEA	1290	MALVERN AVE	CASA BLANCA DR	GLENWOOD DR	B	2	AC	5	296	60	17,760	4/24/26	57	57	43	0	New Construction - Initial	1/1/85
MALVEA	1300	MALVERN AVE	GLENWOOD DR	WOODS AVE	B	2	AC	4	835	60	50,100	4/24/26	53	43	24	33	New Construction - Initial	1/1/85
NUTWOA	4360	NUTWOOD AVE	STATE COLLEGE BLVD	TITAN DR	B	4	AC	6	1,117	64	71,488	1/8/26	58	46	45	9	New Construction - Initial	1/1/88
NUTWOA	4370	NUTWOOD AVE	TITAN DR	COMMONWEALTH AVE	B	4	AC	6	526	64	33,664	1/8/26	66	0	62	38	New Construction - Initial	1/1/88
NUTWOA	4380	NUTWOOD AVE	COMMONWEALTH AVE	FOLINO DR	B	4	AC	6	532	66	35,112	5/16/26	38	65	17	18	New Construction - Initial	1/1/80
NUTWOA	4390	NUTWOOD AVE	FOLINO DR	SB OFF RAMP	B	4	AC	4	488	75	36,600	1/8/26	46	56	44	0	New Construction - Initial	1/1/88
NUTWOA	4395	NUTWOOD AVE	SB OFF RAMP	NB OFF RAMP	B	4	AC	6	472	80	37,760	1/8/26	96	0	100	0	Cold Mill and Overlay	6/1/18
NUTWOA	4400	NUTWOOD AVE	NB OFF RAMP	PLACENTIA AVE	B	4	AC	4	513	60	30,780	1/8/26	96	0	100	0	Cold Mill and Overlay	6/1/18
ORANGA	100	ORANGETHORPE AVE	GILBERT ST	COURTNEY AVE	B	1	AC	5	1,309	80	74,880	5/18/26	67	34	62	4	Surface Treatment - Slurry Seal	7/1/12
ORANGA	120	ORANGETHORPE AVE	COURTNEY AVE	BROOKHURST ST	B	1	AC	5	1,317	80	105,360	1/22/26	66	39	61	0	Surface Treatment - Slurry Seal	7/1/12
ORANGA	150	ORANGETHORPE AVE	BROOKHURST RD	PACIFIC DR	B	1	AC	5	785	80	62,800	5/16/26	51	43	48	9	New Construction - Initial	1/1/81
ORANGA	160	ORANGETHORPE AVE	PACIFIC DR	EADINGTON AVE	B	1	AC	4	1,064	80	85,120	4/27/26	67	34	61	5	Surface Treatment - Slurry Seal	7/1/12

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
ORANGA	170	ORANGETHORPE AVE	EADINGTON AVE	BASQUE AVE	B	1	AC	4	996	80	79,680	1/22/26	85	0	100	0	Surface Treatment - Slurry Seal	7/1/12
ORANGA	180	ORANGETHORPE AVE	BASQUE AVE	ORCHARD AVE	B	1	AAC	4	937	80	74,960	4/27/26	63	10	90	0	Surface Treatment - Slurry Seal	7/1/12
ORANGA	190	ORANGETHORPE AVE	ORCHARD AVE	CITRUS AVE	B	1	AC	4	752	80	60,160	4/27/26	66	6	94	0	Surface Treatment - Slurry Seal	7/1/12
ORANGA	20	ORANGETHORPE AVE	I-5 BRIDGE	PAVEMENT CHANGE	B	1	AC	6	940	80	75,200	1/22/26	76	26	74	0	New Construction - Initial	1/1/84
ORANGA	210	ORANGETHORPE AVE	CITRUS AVE	EUCLID ST	B	1	AC	5	785	80	62,800	4/27/26	72	17	76	7	New Construction - Initial	1/1/81
ORANGA	220	ORANGETHORPE AVE	EUCLID ST	JEFFERSON AVE	B	2	AC	4	769	80	61,520	4/27/26	63	65	20	15	New Construction - Initial	1/1/81
ORANGA	240	ORANGETHORPE AVE	JEFFERSON AVE	WOODS AVE	B	2	AC	4	724	80	57,920	1/22/26	46	62	38	0	New Construction - Initial	1/1/84
ORANGA	250	ORANGETHORPE AVE	WOODS AVE	RICHMAN AVE	B	2	AC	4	1,182	80	94,560	12/26/25	98	0	100	0	New Construction - Initial	1/1/81
ORANGA	260	ORANGETHORPE AVE	RICHMAN AVE	RAY AVE	B	2	AC	4	835	80	66,800	12/26/25	95	0	100	0	New Construction - Initial	1/1/81
ORANGA	270	ORANGETHORPE AVE	RAY AVE	HIGHLAND AVE	B	2	AC	5	500	80	40,000	12/26/25	94	0	100	0	New Construction - Initial	1/1/84
ORANGA	280	ORANGETHORPE AVE	HIGHLAND AVE	HARBOR BLVD	B	2	AC	5	1,338	80	107,040	12/26/25	96	0	100	0	New Construction - Initial	1/1/80
ORANGA	290	ORANGETHORPE AVE	HARBOR BLVD	POMONA AVE	B	3	AAC	5	691	66	45,606	12/26/25	100	0	0	0	Overlay - AC Structural	12/27/23
ORANGA	30	ORANGETHORPE AVE	PAVEMENT CHANGE	MAGNOLIA AVE	B	1	AC	5	1,345	80	110,000	1/22/26	83	28	72	0	New Construction - Initial	1/1/84
ORANGA	300	ORANGETHORPE AVE	POMONA AVE	LEMON ST	B	3	AAC	5	660	60	39,600	12/26/25	100	0	0	0	Overlay - AC Structural	12/27/23
ORANGA	310	ORANGETHORPE AVE	RAYMOND AVE	MANHATTAN AVE	B	3	AC	6	1,338	80	107,040	1/22/26	56	35	37	28	New Construction - Initial	1/1/81
ORANGA	320	ORANGETHORPE AVE	MANHATTAN AVE	ACACIA AVE	B	3	AC	6	1,314	80	105,120	1/22/26	63	53	43	4	New Construction - Initial	1/1/81
ORANGA	330	ORANGETHORPE AVE	ACACIA AVE	STATE COLLEGE BLVD	B	4	AC	6	2,647	80	211,760	1/16/26	100	0	100	0	Complete Reconstruction - AC	10/1/22
ORANGA	340	ORANGETHORPE AVE	STATE COLLEGE BLVD	PLACENTIA AVE	B	4	AAC	6	1,919	86	165,034	1/16/26	100	0	0	0	Surface Reconstruction - AC	2/1/25
ORANGA	40	ORANGETHORPE AVE	MAGNOLIA AVE	VINE AVE	B	1	AC	5	567	80	45,360	5/18/26	66	43	53	4	New Construction - Initial	5/1/02
ORANGA	50	ORANGETHORPE AVE	VINE AVE	A ST	B	1	AC	5	591	80	47,280	1/22/26	65	27	55	18	New Construction - Initial	1/1/84
ORANGA	60	ORANGETHORPE AVE	A ST	PECKHAM ST	B	1	AC	5	544	80	43,520	1/22/26	68	22	66	12	New Construction - Initial	1/1/84
ORANGA	80	ORANGETHORPE AVE	PECKHAM ST	GILBERT ST	B	1	AC	5	833	80	66,640	5/18/26	58	69	22	9	New Construction - Initial	5/1/02
PALMST	3980	PALM ST	LAMBERT RD	MOONSTONE ST	B	6	AAC	5	1,025	60	61,500	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
PALMST	3990	PALM ST	MOONSTONE ST	BONITA PL	B	6	AAC	5	278	60	16,680	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
PALMST	4000	PALM ST	BONITA PL	IMPERIAL HWY (90)	B	6	AAC	5	1,310	60	78,600	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
PARKSR	2680	PARKS RD	ROSECRANS AVE	CONEJO LN	B	8	AC	2	708	60	42,480	4/13/26	56	59	29	12	New Construction - Initial	1/1/80
PARKSR	2710	PARKS RD	CONEJO LN	PIONEER AVE	B	8	AC	2	1,052	60	63,120	4/13/26	47	53	33	14	New Construction - Initial	1/1/80
PARKSR	2720	PARKS RD	PIONEER AVE	RR TRACKS S/ PEACOCK LN	B	8	AC	2	1,310	40	58,935	11/6/25	89	40	42	18	New Construction - Initial	1/1/80
PARKSR	2730	PARKS RD	RR TRACKS S/ PEACOCK LN	BASTANCHURY RD	B	8	AC	2	280	58	16,240	5/11/26	65	0	66	34	New Construction - Initial	1/1/80
PIONEA	2100	PIONEER AVE	GILBERT ST	STARBUCK ST	B	8	AC	2	1,110	37	41,070	11/6/25	83	0	34	66	New Construction - Initial	1/1/80
PIONEA	2110	PIONEER AVE	STARBUCK ST	CAMINO CENTROLOMA	B	8	AC	2	920	40	36,800	11/6/25	82	11	86	3	New Construction - Initial	1/1/80
PIONEA	2120	PIONEER AVE	CAMINO CENTROLOMA	ZIEBELL ST	B	8	AC	2	770	36	27,720	11/6/25	85	13	87	0	New Construction - Initial	1/1/80
PIONEA	2130	PIONEER AVE	ZIEBELL ST	BENCHLEY ST	B	8	AC	2	530	38	20,140	11/6/25	85	0	82	18	New Construction - Initial	1/1/80
PIONEA	2140	PIONEER AVE	BENCHLEY ST	PARKS RD	B	8	AC	2	896	40	35,840	11/6/25	89	0	100	0	New Construction - Initial	1/1/80
PLACEA	4670	PLACENTIA AVE	ARTS AVE	STARLING DR	B	4	AC	4	1,060	50	53,000	11/13/25	47	18	63	19	New Construction - Initial	1/1/80
PLACEA	4680	PLACENTIA AVE	STARLING DR	ROLLING HILLS DR	B	4	AC	4	1,229	50	61,450	5/11/26	62	0	74	26	New Construction - Initial	1/1/80
PLACEA	4690	PLACENTIA AVE	ROLLING HILLS DR	MONTESSORI AVE	B	4	AC	4	554	60	33,240	11/13/25	65	12	88	0	New Construction - Initial	5/1/02
PLACEA	4710	PLACENTIA AVE	CLAIRMONT AVE	MYSTIC AVE	B	4	AC	4	800	60	48,000	5/15/26	67	6	76	18	New Construction - Initial	5/13/02
PLACEA	4770	PLACENTIA AVE	MONTESSORI AVE	CLAIRMONT AVE	B	4	AC	4	533	60	31,980	11/13/25	56	6	87	7	New Construction - Initial	5/14/02
PLACEA	4790	PLACENTIA AVE	PALM DR	MACADAMIA LN	B	4	AC	5	543	60	32,580	12/30/25	87	26	71	3	New Construction - Initial	5/13/02
PLACEA	4800	PLACENTIA AVE	MACADAMIA LN	YORBA LINDA BLVD	B	4	AC	5	577	60	34,620	12/30/25	74	61	33	6	New Construction - Initial	5/7/01
PLACEA	4810	PLACENTIA AVE	YORBA LINDA BLVD	TOPAZ LN	B	4	AAC	5	882	60	52,920	1/16/26	72	10	69	21	6 in overlay	3/1/08
PLACEA	4830	PLACENTIA AVE	GARNET LN	QUARTZ LN	B	4	AAC	4	681	60	40,860	1/16/26	65	22	70	8	6 in overlay	3/1/08
PLACEA	4840	PLACENTIA AVE	QUARTZ LN	MADISON AVE	B	4	AAC	4	834	60	50,040	1/16/26	62	4	81	15	6 in overlay	8/1/09
PLACEA	4850	PLACENTIA AVE	MADISON AVE	RUBY DR	B	4	AAC	4	934	60	56,040	1/16/26	64	17	72	11	6 in overlay	8/1/09
PLACEA	4860	PLACENTIA AVE	RUBY DR	RUBY DR	B	4	AC	5	228	60	13,680	1/16/26	79	23	77	0	New Construction - Initial	1/1/70
PLACEA	4870	PLACENTIA AVE	RUBY DR	NUTWOOD AVE	B	4	AC	5	668	60	40,080	5/18/26	77	0	68	32	New Construction - Initial	1/1/70
PLACEA	4880	PLACENTIA AVE	NUTWOOD AVE	HARMONY LN	B	4	AC	5	670	60	40,200	5/18/26	78	0	96	4	New Construction - Initial	1/1/70
PLACEA	4890	PLACENTIA AVE	HARMONY LN	SUNSET DR	B	4	AC	5	527	60	31,620	5/18/26	69	0	100	0	New Construction - Initial	1/1/70
PLACEA	4900	PLACENTIA AVE	SUNSET DR	CHAPMAN AVE	B	4	AC	5	272	60	16,320	5/18/26	78	11	83	6	New Construction - Initial	1/1/70
PLACEA	4910	PLACENTIA AVE	CHAPMAN AVE	W CENTER ST	B	4	AC	5	486	65	31,590	1/16/26	63	60	40	0	New Construction - Initial	1/1/70
PLACEA	4920	PLACENTIA AVE	W CENTER ST	SANTA FE AVE	B	4	AC	5	536	60	32,160	1/16/26	54	43	39	18	New Construction - Initial	1/1/70
PLACEA	4930	PLACENTIA AVE	SANTA FE AVE	PAVEMENT CHANGE	B	4	AC	4	506	60	30,360	1/16/26	51	51	49	0	New Construction - Initial	1/1/70
PLACEA	4940	PLACENTIA AVE	PAVEMENT CHANGE	PCC	B	4	AC	5	818	60	49,080	1/16/26	65	37	33	30	New Construction - Initial	1/1/70
PLACEA	4950	PLACENTIA AVE	AC	AC	B	4	PCC	4	271	44	11,924	3/3/26	89	45	53	2	New Construction - PCC	1/1/15
PLACEA	4960	PLACENTIA AVE	PCC	W CROWTHER AVE	B	4	AC	5	483	60	28,980	5/18/26	68	12	82	6	New Construction - Initial	1/1/70
PLACEA	4970	PLACENTIA AVE	W CROWTHER AVE	KIMBERLY AVE	B	4	AC	5	864	60	51,840	5/18/26	50	33	54	13	New Construction - Initial	1/1/70
PLACEA	4980	PLACENTIA AVE	KIMBERLY AVE	ORANGETHORPE AVE	B	4	AC	5	1,297	60	77,820	5/18/26	51	46	27	27	New Construction - Initial	1/1/70
RAYMOA	3580	RAYMOND AVE	CHAPMAN AVE	WHITING AVE	B	3	AC	5	300	60	18,000	2/20/26	90	0	68	32	Complete Reconstruction - AC	5/25/20
RAYMOA	3590	RAYMOND AVE	WHITING AVE	WILSHIRE AVE	B	3	AC	5	276	60	16,560	2/20/26	100	0	100	0	Complete Reconstruction - AC	5/25/20
RAYMOA	3600	RAYMOND AVE	WILSHIRE AVE	COMMONWEALTH AVE	B	3	AC	5	735	60	44,100	2/20/26	87	63	2	35	Complete Reconstruction - AC	5/25/20
RAYMOA	3610	RAYMOND AVE	COMMONWEALTH AVE	WALNUT AVE	B	3	AC	5	750	60	45,225	4/27/26	67	28	59	13	Complete Reconstruction - AC	1/1/18
RAYMOA	3640	RAYMOND AVE	WALNUT AVE	PCC 365' S/ WALNUT AVE	B	3	AC	5	367	25	9,875	4/27/26	70	0	100	0	Complete Reconstruction - AC	1/1/18
RAYMOA	3641	RAYMOND AVE	PCC 365' S/ WALNUT AVE	WALNUT AVE	B	3	AC	5	367	25	11,780	2/20/26	80	18	82	0	Complete Reconstruction - AC	1/1/18
RAYMOA	3650	RAYMOND AVE	PCC 365' S/ WALNUT AVE	END PCC 300' N/ ASH AVE	B	3	PCC	2	315	25	7,875	3/3/26	92	0	100	0	New Construction - Initial	1/1/80
RAYMOA	3651	RAYMOND AVE	PCC 300' N/ ASH AVE	END 365' S/ WALNUT AVE	B	3	PCC	2	315	25	7,875	3/3/26	90	0	100	0	New Construction - Initial	1/1/80
RAYMOA	3665	RAYMOND AVE	END PCC 300' N/ ASH AVE	PCC 160' N/ ASH	B	3	AC	5	146	25	4,605	4/27/26	76	0	100	0	Complete Reconstruction - AC	1/1/18
RAYMOA	3666	RAYMOND AVE	PCC 75' N/ ASH	PCC 300' N/ ASH AVE	B	3	AC	5	220	25	5,535	2/20/26	82	26	74	0	Complete Reconstruction - AC	1/1/18
RAYMOA	3670	RAYMOND AVE	PCC 140' N/ ASH AVE	END PCC 50' S/ ASH AVE	B	3	PCC	2	225	25	10,505	3/3/26	91	0	100	0	New Construction - Initial	1/1/80
RAYMOA	3671	RAYMOND AVE	PCC 160' S/ ASH AVE	END PCC 50' N/ ASH AVE	B	3	PCC	2	250	25	8,340	3/3/26	90	0	100	0	New Construction - Initial	1/1/80
RAYMOA	3672	RAYMOND AVE	END PCC 50' S/ ASH AVE (N)	ASH AVE (S)	B	3	AC	2	160	25	5,040	4/27/26	68	0	100	0	New Construction - Initial	1/1/80
RAYMOA	3680	RAYMOND AVE	ASH AVE	ELM ST	B	3	AC	5	349	60	20,940	4/27/26	76	11	89	0	Complete Reconstruction - AC	1/1/18

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
RAYMOA	3690	RAYMOND AVE	ELM ST	KIMBERLY AVE	B	3	AC	5	375	60	22,500	4/27/26	41	37	24	39	New Construction - Initial	1/1/89
RAYMOA	3700	RAYMOND AVE	KIMBERLY AVE	ORANGETHORPE AVE	B	3	AC	5	1,290	60	77,400	4/27/26	56	42	35	23	New Construction - Initial	1/1/89
RAYMOA	3730	RAYMOND AVE	ORANGETHORPE AVE	BURTON ST	B	3	AC	5	1,592	60	95,520	5/18/26	28	47	18	35	New Construction - Initial	1/1/89
RAYMOA	3760	RAYMOND AVE	BURTON ST	RIVERSIDE FWY (91)	B	3	AAC	5	486	60	29,160	2/20/26	79	37	63	0	Overlay - AC Structural	11/16/21
ROSECA	1970	ROSECRANS AVE	W CITY LIMITS	EMERY RANCH RD	B	8	AAC	5	182	80	14,560	10/22/25	97	0	100	0	Overlay - AC Structural	6/1/22
ROSECA	1980	ROSECRANS AVE	EMERY RANCH RD	SUNNY RIDGE DR	B	8	AAC	4	4,320	80	345,600	10/22/25	97	0	100	0	Overlay - AC Structural	6/1/22
ROSECA	1990	ROSECRANS AVE	SUNNY RIDGE DR	LEGGETT LN	B	8	AC	4	660	80	52,800	5/15/26	42	19	50	31	New Construction - Initial	8/1/04
ROSECA	2000	ROSECRANS AVE	LEGGETT LN	GILBERT ST	B	8	AC	4	742	80	59,360	4/13/26	54	22	63	15	New Construction - Initial	8/1/04
ROSECA	2010	ROSECRANS AVE	GILBERT ST	CANYON DR	B	8	AC	4	1,681	60	100,860	4/13/26	62	0	97	3	Reconstruct Surface (AC)	7/1/12
ROSECA	2020	ROSECRANS AVE	CANYON DR	CAMINO CENTROLOMA	B	8	AC	4	1,189	60	71,340	4/13/26	69	15	78	7	New Construction - Initial	1/1/80
ROSECA	2030	ROSECRANS AVE	CAMINO CENTROLOMA	SERRANO PL	B	8	AC	5	360	60	21,600	10/22/25	15	65	19	16	New Construction - Initial	1/1/80
ROSECA	2040	ROSECRANS AVE	SERRANO PL	PARKS RD	B	8	AC	4	690	60	41,400	5/4/26	47	59	30	11	New Construction - Initial	1/1/80
ROSECA	2050	ROSECRANS AVE	PARKS RD	CAMINO REY	B	8	AC	5	539	60	32,340	5/4/26	62	33	47	20	New Construction - Initial	1/1/80
ROSECA	2060	ROSECRANS AVE	CAMINO REY	CAMINO LA VISTA	B	8	AC	4	1,048	60	62,880	10/22/25	54	61	27	12	New Construction - Initial	1/1/80
ROSECA	2070	ROSECRANS AVE	CAMINO LA VISTA	CAMINO LOMA	B	8	AC	4	470	60	28,200	3/2/26	42	40	41	19	New Construction - Initial	1/1/80
ROSECA	2080	ROSECRANS AVE	CAMINO LOMA	CAMINO DEL SOL	B	8	AC	5	545	68	37,060	4/3/26	100	0	0	0	Complete Reconstruction - AC	4/3/26
ROSECA	2090	ROSECRANS AVE	CAMINO DEL SOL	EUCLID ST	B	8	AC	6	361	80	28,880	4/3/26	100	0	0	0	Complete Reconstruction - AC	4/3/26
STATCB	4050	STATE COLLEGE BLVD	N CITY LIMITS	CHANGE IN PAVEMENT	B	5	AC	4	545	65	35,425	1/9/26	77	49	51	0	Crack Sealing - AC	3/1/11
STATCB	4060	STATE COLLEGE BLVD	CHANGE IN PAVEMENT	LARK ELLEN AVE	B	5	AC	4	134	65	8,710	1/9/26	38	49	38	13	Crack Sealing - AC	3/1/11
STATCB	4070	STATE COLLEGE BLVD	LARK ELLEN AVE	ROSALIA DR	B	5	AC	4	658	80	52,640	1/9/26	26	63	31	6	Crack Sealing - AC	3/1/11
STATCB	4080	STATE COLLEGE BLVD	ROSALIA DR	ROLLING HILLS DR	B	5	AC	5	500	80	40,000	1/9/26	29	53	36	11	Crack Sealing - AC	3/1/11
STATCB	4090	STATE COLLEGE BLVD	ROLLING HILLS DR	DELICATA DR	B	5	AC	4	1,153	66	76,098	1/9/26	48	37	48	15	Crack Sealing - AC	3/1/11
STATCB	4100	STATE COLLEGE BLVD	DELICATA DR	BASTANCHURY RD	B	5	AC	5	1,038	66	68,508	1/9/26	52	50	35	15	Crack Sealing - AC	3/1/11
STATCB	4110	STATE COLLEGE BLVD	BASTANCHURY RD	MOUNTAIN RIDGE DR	B	5	AC	6	970	90	87,300	1/9/26	24	45	39	16	Crack Sealing - AC	3/1/11
STATCB	4120	STATE COLLEGE BLVD	MOUNTAIN RIDGE DR	VISTA DEL SOL	B	5	AC	6	1,011	66	66,726	1/9/26	27	59	35	6	Crack Sealing - AC	3/1/11
STATCB	4130	STATE COLLEGE BLVD	VISTA DEL SOL	VISTA DEL ORO	B	5	AC	6	787	80	62,960	1/9/26	42	58	38	4	Crack Sealing - AC	3/1/11
STATCB	4150	STATE COLLEGE BLVD	VISTA DEL ORO	YORBA LINDA BLVD	B	5	AC	6	938	80	75,040	1/9/26	36	51	40	9	Crack Sealing - AC	3/1/11
STATCB	4170	STATE COLLEGE BLVD	YORBA LINDA BLVD	RANCH RD	B	5	AC	5	1,228	80	98,240	12/30/25	77	12	88	0	Crack Sealing - AC	3/1/11
STATCB	4180	STATE COLLEGE BLVD	RANCH RD	MELODY LN	B	5	AC	5	718	80	57,440	12/30/25	80	14	86	0	Crack Sealing - AC	3/1/11
STATCB	4190	STATE COLLEGE BLVD	MELODY LN	DOROTHY LN	B	5	AC	5	380	80	30,400	12/30/25	78	20	80	0	Crack Sealing - AC	3/1/11
STATCB	4200	STATE COLLEGE BLVD	DOROTHY LN	NUTWOOD AVE	B	4	AC	6	1,383	79	109,257	12/30/25	70	29	71	0	Crack Sealing - AC	3/1/11
STATCB	4210	STATE COLLEGE BLVD	NUTWOOD AVE	CHAPMAN AVE	B	4	AC	6	1,265	80	101,200	12/30/25	80	14	86	0	New Construction - Initial	1/1/94
STATCB	4220	STATE COLLEGE BLVD	CHAPMAN AVE	REVERE AVE	B	4	AC	5	877	64	56,128	2/23/26	69	24	56	20	New Construction - Initial	1/1/97
STATCB	4250	STATE COLLEGE BLVD	REVERE AVE	COMMONWEALTH AVE	B	4	AC	5	440	60	26,400	4/27/26	78	26	74	0	New Construction - Initial	1/1/97
STATCB	4260	STATE COLLEGE BLVD	COMMONWEALTH AVE	WALNUT AVE	B	4	AC	5	660	60	40,100	2/23/26	77	64	36	0	Complete Reconstruction - AC	1/1/18
STATCB	4280	STATE COLLEGE BLVD	WALNUT AVE	PCC S/ FENDER AVE	B	4	AC	5	503	80	39,005	2/23/26	86	31	69	0	Complete Reconstruction - AC	1/1/18
STATCB	4285	STATE COLLEGE BLVD	BEGIN PCC S/ FENDER AVE	END PCC S/ VALENCIA	B		PCC	0	410	81	27,685	3/3/26	89	27	73	0	New Construction - Initial	1/1/17
STATCB	4300	STATE COLLEGE BLVD	END PCC S/ VALENCIA	KIMBERLY AVE	B	4	AC	5	1,108	80	93,432	5/18/26	67	55	45	0	Complete Reconstruction - AC	1/1/18
STATCB	4310	STATE COLLEGE BLVD	KIMBERLY AVE	CYPRESS WY	B	4	AC	5	707	65	45,955	5/18/26	70	15	85	0	Complete Reconstruction - AC	1/1/18
STATCB	4320	STATE COLLEGE BLVD	CYPRESS WY	ORANGETHORPE AVE	B	4	AC	4	545	60	32,700	2/23/26	60	28	55	17	Complete Reconstruction - AC	1/1/18
STATCB	4330	STATE COLLEGE BLVD	ORANGETHORPE AVE	CARBON CREEK CHANNEL	B	4	AC	5	633	81	51,273	5/18/26	68	23	77	0	Complete Reconstruction - AC	1/1/18
VALEND	350	VALENCIA DR	DALE ST	MEADE AVE	B	7	AC	4	780	60	46,800	12/18/25	77	0	100	0	New Construction - Initial	1/1/77
VALEND	370	VALENCIA DR	MEADE AVE	EDWARD AVE	B	7	AC	4	683	60	40,980	12/18/25	66	39	49	12	New Construction - Initial	1/1/77
VALEND	380	VALENCIA DR	EDWARD AVE	MAGNOLIA AVE	B	7	AC	4	1,178	60	70,680	12/18/25	58	42	43	15	New Construction - Initial	1/1/77
VALEND	420	VALENCIA DR	MAGNOLIA AVE	PRITCHARD AVE	B	7	AAC	4	841	60	50,460	12/18/25	94	0	100	0	Overlay - AC Structural	10/1/22
VALEND	430	VALENCIA DR	PRITCHARD AVE	PRITCHARD AVE	B	7	AC	4	180	60	10,800	12/18/25	95	0	100	0	New Construction - Initial	1/1/80
VALEND	4340	VALENCIA DR	RAYMOND AVE	SALLY PL	B	3	AC	3	1,421	60	85,260	4/7/26	56	33	63	4	New Construction - Initial	1/1/96
VALEND	4345	VALENCIA DR	RAYMOND AVE	ACACIA AVE	B	3	AC	3	1,190	60	71,400	4/7/26	53	43	53	4	New Construction - Initial	1/1/96
VALEND	4350	VALENCIA DR	ACACIA AVE	PVMT CHNGE (1550' E/ ACACIA AVE)	B	4	AC	3	1,548	60	92,880	4/7/26	56	33	63	4	New Construction - Initial	1/1/96
VALEND	4355	VALENCIA DR	PVMT CHNGE (1550' E/ ACACIA AVE)	PCC W/ STATE COLLEGE BLVD	B	4	AC	3	650	60	37,650	4/7/26	74	57	43	0	New Construction - Initial	1/1/96
VALEND	4356	VALENCIA DR	PCC W/ STATE COLLEGE BLVD	STATE COLLEGE BLVD	B		PCC	0	345	40	14,125	3/3/26	90	0	100	0	New Construction - Initial	1/1/17
VALEND	440	VALENCIA DR	PRITCHARD AVE	JENSEN WY	B	7	AAC	4	738	60	44,280	12/18/25	92	0	84	16	Overlay - AC Structural	10/1/22
VALEND	450	VALENCIA DR	JENSEN WY	GILBERT AVE	B	7	AAC	4	739	60	44,340	12/18/25	100	0	100	0	Overlay - AC Structural	10/1/22
VALEND	460	VALENCIA DR	GILBERT ST	PINE DR	B	7	AC	4	304	60	18,240	12/18/25	85	0	100	0	Complete Reconstruction - AC	6/1/18
VALEND	470	VALENCIA DR	PINE DR	PINE DR	B	7	AC	4	201	60	12,060	12/18/25	88	0	100	0	Complete Reconstruction - AC	6/1/18
VALEND	480	VALENCIA DR	PINE DR	NAPA CT	B	7	AC	4	498	60	29,880	12/18/25	88	28	72	0	Complete Reconstruction - AC	6/1/18
VALEND	490	VALENCIA DR	NAPA CT	COURTNEY AVE	B	7	AC	4	322	60	19,320	12/18/25	87	0	100	0	Complete Reconstruction - AC	6/1/18
VALEND	500	VALENCIA DR	COURTNEY AVE	CEDAR AVE	B	7	AC	4	451	60	27,060	12/18/25	87	0	100	0	Complete Reconstruction - AC	6/1/18
VALEND	510	VALENCIA DR	CEDAR AVE	BROOKHURST RD	B	7	AC	4	868	60	52,080	12/18/25	82	27	73	0	Complete Reconstruction - AC	6/1/18
VALEND	520	VALENCIA DR	BROOKHURST RD	LOCUST DR	B	7	AC	4	370	60	22,200	12/18/25	93	16	55	29	Complete Reconstruction - AC	6/1/18
VALEND	530	VALENCIA DR	LOCUST DR	WANDA DR	B	7	AC	3	494	60	29,640	12/18/25	96	0	100	0	Complete Reconstruction - AC	6/1/18
VALEND	540	VALENCIA DR	WANDA DR	PACIFIC DR	B	7	AC	3	442	60	26,520	12/18/25	94	0	100	0	Complete Reconstruction - AC	6/1/18
VALEND	550	VALENCIA DR	PACIFIC DR	EADINGTON AVE	B	7	AC	2	173	60	10,380	12/18/25	94	0	80	20	Complete Reconstruction - AC	6/1/18
VALEND	560	VALENCIA DR	EADINGTON AVE	BASQUE AVE	B	7	AC	3	1,182	60	70,920	12/18/25	95	0	100	0	Complete Reconstruction - AC	6/1/18
VALEND	570	VALENCIA DR	BASQUE AVE	BASQUE AVE	B	7	AC	2	128	60	7,680	12/18/25	94	0	82	18	New Construction - Initial	1/1/77
VALEND	580	VALENCIA DR	BASQUE AV E	EUCLID ST	B	7	AC	3	2,526	60	151,560	12/18/25	83	42	54	4	New Construction - Initial	1/1/80
VALEND	590	VALENCIA DR	EUCLID ST	WOODS AVE	B	2	AC	3	1,350	60	81,000	1/30/26	43	61	31	8	New Construction - Initial	1/1/82
VALEND	600	VALENCIA DR	WOODS AVE	RICHMAN AVE	B	2	AC	3	1,360	60	81,600	1/30/26	52	30	57	13	New Construction - Initial	1/1/80
VALEND	610	VALENCIA DR	RICHMAN AVE	HIGHLAND AVE	B	2	AC	2	1,349	50	67,450	1/30/26	87	12	51	37	New Construction - Initial	1/1/96
YORBLB	4430	YORBA LINDA BLVD	STATE COLLEGE BLVD	ALMIRA AVE	B	4	AC	6	789	80	63,120	12/30/25	76	40	60	0	New Construction - Initial	1/1/91
YORBLB	4440	YORBA LINDA BLVD	ALMIRA AVE	ASSOCIATED RD	B	4	AC	6	653	80	52,240	12/30/25	70	49	51	0	New Construction - Initial	1/1/91
YORBLB	4450	YORBA LINDA BLVD	ASSOCIATED RD	OXFORD AVE	B	4	AC	6	550	80	44,000	12/30/25	37	69	31	0	New Construction - Initial	1/1/91

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
YORBLB	4460	YORBA LINDA BLVD	OXFORD AVE	ORANGE FWY (57)	B	4	AC	6	957	67	64,119	12/30/25	37	49	51	0	New Construction - Initial	1/1/91
YORBLB	4470	YORBA LINDA BLVD	ORANGE FWY (57)	PLACENTIA AVE	B	4	AC	6	1,845	60	110,700	1/8/26	18	69	31	0	New Construction - Initial	1/1/91
YORBLB	4480	YORBA LINDA BLVD	PLACENTIA AVE	SAPPHIRE RD	B	4	AC	6	1,395	60	83,700	5/11/26	76	4	74	22	New Construction - Initial	1/1/91
YORBLB	4490	YORBA LINDA BLVD	SAPPHIRE RD	BRADFORD AVE	B	4	AC	6	1,327	60	79,620	1/8/26	69	30	62	8	New Construction - Initial	1/1/82
									68.4		**22,545,890**							
		Locals																
ACACIA	5000	ACACIA AVE	LADERA VISTA DR	RIDGEMONT CT	E	5	AC	2	596	36	33,840	1/6/21	86	0	86	14	New Construction - Initial	1/1/80
ACACIA	50000	ACACIA AVE	VISTA DEL MAR	MIRAMAR DR	E	5	AC	2	2,427	32	77,664	11/19/20	56	67	30	3	New Construction - AC	1/1/80
ACACIA	5010	ACACIA AVE	VISTA DEL MAR DR	RIDGEMONT CT	E	5	AC	2	326	32	10,432	1/6/21	46	70	29	1	New Construction - Initial	1/1/80
ACACIA	5015	ACACIA AVE	MIRAMAR DR	MELODY LN	E	5	AC	2	862	37	31,894	4/16/25	62	41	41	18	New Construction - Initial	1/1/80
ACACIA	5020	ACACIA AVE	MELODY LN	DOROTHY LN	E	5	AAC	2	530	36	19,080	8/28/25	100	0	0	0	Overlay - AC Structural	8/28/25
ACACIA	5030	ACACIA AVE	DOROTHY LN	VICTORIA DR	E	4	AAC	2	640	36	23,040	8/30/25	100	0	0	0	Overlay - AC Structural	8/30/25
ACACIA	5040	ACACIA AVE	VICTORIA DR	CHAPMAN AVE	E	4	AC	2	1,965	36	70,740	1/13/21	25	57	34	9	New Construction - Initial	1/1/80
ADAMS	5050	ADAMS AVENUE	END	CHAPMAN AVE	E	2	AC	2	140	26	3,640	12/20/21	18	86	14	0	New Construction - Initial	1/1/80
ADAMS	5060	ADAMS AVENUE	CHAPMAN AVE	WILSHIRE AVE	E	2	AC	2	560	32	17,920	12/20/21	44	60	40	0	New Construction - Initial	1/1/80
ADAMS	5070	ADAMS AVENUE	MAPLEWOOD AVE	OAK AVE	E	2	AC	2	500	32	16,000	2/17/22	41	78	22	0	Surface Treatment - Slurry Seal	7/1/12
ADAMS	5080	ADAMS AVENUE	OAK AVE	ELM AVE / S WOOD AVE	E	2	AC	2	350	32	11,200	2/17/22	43	55	19	26	Surface Treatment - Slurry Seal	7/1/12
ADAMS	5090	ADAMS AVENUE	KNEPP AVE	PORTER AVE	E	2	AC	2	850	32	27,200	12/1/21	71	64	36	0	Surface Treatment - Slurry Seal	7/1/12
ADLENA	6000	ADLENA DR	VALLEY VIEW DR	ADLENA PL	E	7	AC	2	1,650	32	52,800	4/25/23	30	75	12	13	New Construction - Initial	1/1/80
ADLENA	6010	ADLENA DR	ADLENA PL	MALVERN AVE	E	7	AC	2	670	32	21,440	4/25/23	26	76	10	14	New Construction - Initial	1/1/80
ADLENA	6020	ADLENA DR	THOMAS WAY	CHAPMAN AVE	E	7	AC	2	460	26	11,960	4/23/25	38	72	25	3	New Construction - Initial	1/1/80
ADLENA	6030	ADLENA DR	CHAPMAN AVE	GREGORY AVE	E	7	AC	2	1,015	26	26,390	4/23/25	86	0	16	84	New Construction - Initial	1/1/80
ADLENP	6040	ADLENA PL	BASTANCHURY AVE	ADLENA DR	E	7	AC	2	160	32	5,120	4/25/23	32	61	27	12	New Construction - Initial	1/1/80
AIRPAR	6050	AIRPARK DR	MOORE AVE	RAYMER AVE	E	8	AC	2	660	40	26,400	4/25/23	45	67	33	0	New Construction - Initial	1/1/80
ALBERT	6060	ALBERTA PL	END	GREGORY AVE	E	7	AC	2	400	26	10,400	4/2/25	94	0	90	10	New Construction - Initial	1/1/80
ALBERT	6070	ALBERTA PL	GREGORY AVE	COMMONWEALTH AVE	E	7	AC	2	135	26	3,510	4/2/25	21	50	35	15	New Construction - Initial	1/1/80
ALBERT	6080	ALBERTA PL	OAK AVE	ELM AVE	E	1	AC	2	280	32	8,960	3/19/25	8	95	5	0	Surface Treatment - Slurry Seal	7/1/12
ALDER	6090	ALDER PL	END	ROSALIA DR	E	5	AC	2	150	32	4,800	6/5/26	63	26	45	0	Surface Treatment - REAS	8/28/25
ALMIRA	7000	ALMIRA AVE	CYPRESS AVE	YORBA LINDA BLVD	E	4	AC	2	1,430	32	45,760	4/21/25	71	70	26	4	Surface Treatment - Slurry Seal	5/25/20
ALTVIS	7010	ALTA VISTA DR	RODEO RD	END	E	7	AC	2	590	24	14,160	4/9/25	15	74	17	9	New Construction - Initial	1/1/80
ALTIVO	7020	ALTIVO PL	END	ARBOLADO DR	E	6	AAC	2	490	32	15,680	12/1/20	100	0	100	0	Overlay - AC Structural	8/1/17
ALTOLN	7030	ALTO LN	RIEDEL AVE	ACACIA AVE	E	5	AC	2	1,087	32	34,784	4/16/25	38	56	34	10	New Construction - Initial	1/1/80
ALTOLN	7040	ALTO LN	MOUNTAIN VIEW PL	HALE AVE	E	5	AC	2	375	32	12,000	12/10/20	63	44	44	12	New Construction - Initial	1/1/80
ALTURA	7050	ALTURA DR	LAS PALMAS DR	LAS PALMAS DR	E	6	AC	2	1,230	20	24,600	12/30/20	52	81	19	0	New Construction - Initial	1/1/80
ALVRDO	7060	ALVARADO CIR	CORONADO DR	END	E	6	AC	2	380	26	9,880	4/18/25	71	17	83	0	Surface Treatment - Slurry Seal	5/25/20
AMERIG	7070	AMERIGE AVE	BASQUE AVE	ORCHARD AVE	E	7	AC	2	1,070	32	34,240	4/1/25	17	76	5	19	New Construction - Initial	1/1/80
AMERIG	7080	AMERIGE AVE	ORCHARD AVE	ORANGE AVE	E	7	AC	2	1,230	32	39,360	12/22/21	31	48	28	24	New Construction - Initial	1/1/80
AMERIG	7090	AMERIGE AVE	ROOSEVELT AVE	DRAKE AVE	E	2	AC	2	1,610	36	57,960	12/1/21	55	77	23	0	New Construction - Initial	1/1/80
AMERIG	8000	AMERIGE AVE	DRAKE AVE	FORD AVE	E	2	AC	2	1,309	36	47,124	12/1/21	92	0	60	40	New Construction - Initial	1/1/80
AMERIG	8010	AMERIGE AVE	FORD AVE	HARBOR BLVD	E	2	AC	2	1,941	36	69,876	12/1/21	95	0	100	0	Surface Treatment - REAS	7/30/25
AMERIG	8020	AMERIGE AVE	HARBOR BLVD	POMONA AVE	E	3	AAC	2	600	36	21,600	5/5/25	100	0	0	0	Overlay - AC Structural	5/5/25
AMERIG	8025	AMERIGE AVE	POMONA AVE	LEMON ST	E	3	AC	2	610	36	21,960	12/3/21	92	0	100	0	New Construction - Initial	3/1/11
AMERIG	8030	AMERIGE AVE	LEMON ST	BALCOM AVE	E	3	AC	2	1,250	36	45,000	11/19/21	19	39	53	8	New Construction - Initial	1/1/80
AMERIG	8035	AMERIGE AVE	CONCORD AVE	LILLIE AVE	E	4	AC	2	255	32	8,160	5/14/25	94	0	100	0	Surface Treatment - Slurry Seal	6/1/24
AMHERS	8040	AMHERST AVE	TERI PL	END	E	4	AC	2	1,026	32	32,832	4/22/25	89	0	54	46	New Construction - Initial	1/1/80
AMHERS	8050	AMHERST AVE	DEREK DR	END	E	4	AC	2	300	32	9,600	4/22/25	91	0	100	0	Surface Treatment - Slurry Seal	5/25/20
AMHERS	8060	AMHERST AVE	DEERPARK DR	HARTFORD AVE	E	4	AC	2	832	32	26,624	6/5/26	99	0	100	0	Surface Treatment - REAS	8/28/25
ANACAP	8070	ANACAPA PL	END	SANTA BARBARA AVE	E	6	AC	2	1,984	32	63,488	12/11/20	57	58	6	36	New Construction - Initial	1/1/80
ANDOVE	8080	ANDOVER AVE	TERI PL	DEREK DR	E	4	AC	2	997	32	31,904	4/22/25	91	0	100	0	New Construction - Initial	1/1/80
ANITA	8090	ANITA PL	END	MIRAMAR DR	E	5	AC	2	245	32	7,840	12/22/20	21	75	25	0	New Construction - Initial	1/1/80
ANNIN	9000	ANNIN AVE	CHAPMAN AVE	WILSHIRE AVE	E	3	AC	2	528	32	16,896	12/6/21	90	0	100	0	New Construction - Initial	1/1/80
ANNIN	9010	ANNIN AVE	WILSHIRE AVE	COMMONWEALTH AVE	E	3	AC	2	767	32	24,544	12/6/21	84	37	63	0	New Construction - Initial	1/1/80
ANNIN	9015	ANNIN AVE	COMMONWEALTH AVE	S END	E	3	AC	2	750	26	19,500	5/14/25	84	70	30	0	Surface Treatment - Slurry Seal	6/1/24
ANZAPL	9020	ANZA PL	END	ASH AVE	E	1	AC	2	182	26	4,732	3/19/25	23	72	28	0	New Construction - Initial	1/1/80
AQUILA	9030	AQUILA AVE	SANTA YSABEL AVE	SANTA CLARA AVE	E	4	AAC	2	545	32	17,440	9/1/24	100	0	0	0	Overlay - AC Structural	9/1/24
ARAGON	9040	ARAGON PL	END	CIENAGA DR	E	6	AC	2	305	32	9,760	4/18/25	55	62	38	0	Surface Treatment - Slurry Seal	5/25/20
ARBOL	9050	ARBOL DR	LAS FALDAS DR	END	E	6	AAC	2	1,530	26	39,780	4/16/22	100	0	0	0	Overlay - AC Structural	4/16/22
ARBOLA	9060	ARBOLADO DR	TWILIGHT DR	MADONNA DR	E	6	AAC	2	930	32	29,760	11/25/20	95	0	100	0	Overlay - AC Structural	8/1/17
ARBOLA	9065	ARBOLADO DR	MADONNA DR	SARAH PL	E	6	AC	2	360	32	11,520	11/25/20	100	0	100	0	Complete Reconstruction - AC	8/1/17
ARBOLA	9070	ARBOLADO DR	SARAH PL	EL MIRADOR DR	E	6	AC	2	1,080	32	34,560	11/25/20	100	0	100	0	Complete Reconstruction - AC	8/1/17
ARBOLA	9080	ARBOLADO DR	EL MIRADOR DR	MADONNA DR	E	6	AC	2	1,730	32	55,360	11/25/20	100	0	100	0	Complete Reconstruction - AC	8/1/17
ARLING	9090	ARLINGTON AVE	PUENTE ST	ARROUES DR	E	6	AC	2	701	32	22,432	4/22/25	89	26	74	0	Surface Treatment - Slurry Seal	5/25/20
ARMSTE	10000	ARMSTEAD LN	END	CAMINO DEL SOL	E	8	AC	2	263	32	8,416	4/11/25	41	46	54	0	New Construction - Initial	1/1/80
ARROUE	10010	ARROUES DR	N END	LANTANA AVE	E	6	AC	2	1,300	32	41,600	4/22/25	87	0	57	43	Surface Treatment - Slurry Seal	5/25/20
ARROUE	10020	ARROUES DR	LANTANA AVE	E END	E	6	AC	2	153	32	4,896	4/22/25	81	55	40	5	Surface Treatment - Slurry Seal	5/25/20
ARROYO	10030	ARROYO DR	ARROYO PL	EUCLID ST	E	7	AC	2	1,071	26	27,846	12/22/21	90	0	73	27	Complete Reconstruction - AC	7/1/17
ARROYP	10040	ARROYO PL	FERN DR	ARROYO DR	E	7	AC	2	480	26	12,480	12/23/21	94	0	100	0	Complete Reconstruction - AC	7/1/17
ARTESI	10050	ARTESIA AVE	DALE PL	PRICHARD AVE	E	7	AC	2	3,487	39	135,993	3/26/25	13	74	17	9	New Construction - Initial	1/1/80
ARTESI	10060	ARTESIA AVE	PRITCHARD AVE	GILBERT ST	E	7	AC	2	1,650	39	64,350	4/25/23	33	48	33	19	New Construction - Initial	1/1/80
ASHAVE	10070	ASH AVE	DALE ST	MEADE AVE	E	1	AAC	2	762	32	24,384	4/27/23	95	0	100	0	Overlay - AC Structural	4/16/22
ASHAVE	10075	ASH AVE	MEADE AVE	END	E	1	AAC	2	402	32	12,864	4/27/23	95	0	100	0	Surface Reconstruction - AC	4/16/22

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
ASHAVE	10080	ASH AVE	MAGNOLIA AVE	PRITCHARD AVE	E	1	AC	2	975	32	31,200	4/20/23	68	32	68	0	Surface Treatment - Slurry Seal	7/1/12
ASHAVE	10090	ASH AVE	PINE DR	COURTNEY AVE	E	1	AC	2	985	26	26,410	4/18/23	91	0	95	5	Surface Treatment - Slurry Seal	7/1/12
ASHAVE	10095	ASH AVE	COURTNEY AVE	OAK AVE	E	1	AC	2	1,048	26	27,248	4/18/23	66	72	16	12	Surface Treatment - Slurry Seal	7/1/12
ASHAVE	10100	ASH AVE	LOCUST DR	PACIFIC DR	E	1	AC	2	773	26	20,098	3/25/25	22	85	15	0	Surface Treatment - Slurry Seal	7/1/12
ASHAVE	10110	ASH AVE	EADINGTON AVE	LAMBERT DR	E	1	AC	2	1,008	32	32,256	3/19/25	15	76	22	2	Surface Treatment - Slurry Seal	7/1/12
ASHAVE	10120	ASH AVE	BASQUE AVE	LEE AVE	E	1	AC	2	700	36	25,200	4/23/25	19	86	6	8	Surface Treatment - Slurry Seal	7/1/12
ASHAVE	10125	ASH AVE	LEE AVE	DELHI PL	E	1	AC	2	551	36	19,836	4/23/25	58	62	38	0	Surface Treatment - Slurry Seal	7/1/12
ASHAVE	10130	ASH AVE	DELHI PL	ANZA PL	E	1	AC	2	290	36	10,440	4/23/25	51	68	31	1	Surface Treatment - Slurry Seal	7/1/12
ASHAVE	10133	ASH AVE	ANZA PL	CITRUS AVE	E	1	AC	2	333	36	11,988	3/19/25	20	80	0	20	Surface Treatment - Slurry Seal	7/1/12
ASHAVE	10136	ASH AVE	CITRUS AVE	EUCLID AVE	E	1	AC	2	672	36	24,192	4/23/25	38	68	20	12	Surface Treatment - Slurry Seal	7/1/12
ASHAVE	10140	ASH AVE	WOODS AVE	RICHMAN AVE	E	2	AC	2	1,196	32	38,272	11/29/21	69	82	18	0	New Construction - Initial	1/1/80
ASHAVE	10150	ASH AVE	HIGHLAND AVE	MALDEN AVE	E	2	AC	2	618	32	19,776	11/22/21	95	0	100	0	Complete Reconstruction - AC	6/1/18
ASHAVE	10155	ASH AVE	MALDEN AVE	HARBOR BLVD	E	2	AC	2	613	32	19,616	11/22/21	95	0	99	1	Cold Mill and Overlay	6/1/18
ASHAVE	10160	ASH AVE	HARBOR BLVD	END	E	3	AC	2	971	36	34,956	11/22/21	95	0	100	0	New Construction - Initial	1/1/80
ASHAVE	10170	ASH AVE	LEMON ST	LAWRENCE AVE	E	3	AC	2	600	30	18,000	11/22/21	95	0	100	0	New Construction - Initial	1/1/80
ASHAVE	10180	ASH AVE	ELM AVE	RAYMOND AVE	E	3	AC	2	1,281	40	51,240	2/17/22	60	0	100	0	New Construction - Initial	1/1/80
ASHAVE	10190	ASH AVE	RAYMOND AVE	END	E	3	AC	2	642	32	20,544	2/17/22	62	24	69	7	New Construction - Initial	1/1/80
ASHAVE	50060	ASH AVE	PRITCHARD AVE	JENSEN WAY	E	1	AC	2	840	32	26,880	4/20/23	61	75	25	0	Surface Treatment - Slurry Seal	7/1/12
ASHBUR	10200	ASHBURN TERR	BREA BLVD	OAKMONT PL	E	5	AC	2	188	52	9,776	4/16/25	80	69	31	0	New Construction - Initial	1/1/80
ASHFOR	102010	ASHFORD PL	END	WILSHIRE AVE	E	3	AC	2	408	26	10,608	12/6/21	87	0	100	0	New Construction - Initial	1/1/80
ASHFOR	10220	ASHFORD PL	REVERE AVE	END	E	3	AC	2	196	26	5,096	12/6/21	97	0	100	0	New Construction - Initial	1/1/80
ASHFOR	10230	ASHFORD PL	SUDENE AVE	END	E	3	AC	2	301	26	7,826	5/14/25	87	0	100	0	Surface Treatment - Slurry Seal	6/1/24
ASPENC	10240	ASPEN CIR	END	LIVE OAK AVE	E	5	AC	2	220	32	7,040	11/25/20	95	0	9	91	Complete Reconstruction - AC	6/1/18
ATHENA	10280	ATHENA PL	POST RD	END	E	8	AC	2	347	32	11,104	4/17/25	30	58	27	15	New Construction - Initial	1/1/80
ATHERT	10290	ATHERTON CIR	CAMINO DEL SOL	CAMINO DEL SOL	E	8	AC	2	1,098	32	35,136	4/11/25	53	48	51	1	New Construction - Initial	1/1/80
AVALON	10300	AVALON DR	END	MARION BLVD	E	5	AAC	2	547	32	17,504	10/29/24	100	0	0	0	Overlay - AC Structural	10/29/24
AVEANT	10310	AVENIDA ANTIGUA	END	MANZANITA DR	E	8	AC	2	442	32	14,144	4/22/25	43	51	35	14	New Construction - Initial	1/1/80
AVEDCO	10320	AVENIDA DEL CORTO	END	NICOLAS DR	E	8	AC	2	539	32	17,248	4/11/25	42	34	48	18	New Construction - Initial	1/1/80
AVEDNO	10330	AVENIDA DEL NORTE	END	PARKS RD	E	8	AC	2	415	32	13,280	4/11/25	33	29	70	1	New Construction - Initial	1/1/80
AVEDOS	10340	AVENIDA DEL OSSA	END	CAMINO CENTROLOMA	E	8	AC	2	500	32	16,000	4/21/25	32	51	46	3	New Construction - Initial	1/1/80
AVESLO	10350	AVENIDA SAN LORENZO	SERRANO PL	CAMINO REY	E	8	AAC	2	872	32	27,904	4/11/25	95	0	100	0	Overlay - AC Structural	4/1/23
AVESEL	10360	AVENIDA SELVA	CALLE CANDELA	END	E	8	AC	2	292	32	9,344	4/22/25	20	70	24	6	New Construction - Initial	1/1/80
AVESOL	10370	AVENIDA SOLEDAD	END	MANZANITA DR	E	8	AC	2	643	32	20,576	4/22/25	23	50	43	7	New Construction - Initial	1/1/80
AVESOL	10380	AVENIDA SOLEDAD	MANZANITA DR	N END	E	8	AC	2	736	32	23,552	4/22/25	29	57	34	9	New Construction - Initial	1/1/80
AVOLEN	10390	AVOLENCIA DR	SUNNYCREST DR	RICHMAN AVE	E	7	AC	2	1,288	28	36,064	4/8/25	88	0	23	77	New Construction - Initial	1/1/80
AVOLEN	10395	AVOLENCIA DR	RICHMAN AVE	VALLEY VIEW DR	E	7	AC	2	1,575	32	50,400	4/23/25	15	59	36	5	New Construction - Initial	1/1/80
BAKER	10400	BAKER AVE	COURTNEY AVE	CUL-DE-SAC (W)	E	1	AC	2	455	32	15,760	4/12/23	41	69	16	15	Surface Treatment - Slurry Seal	7/1/12
BAKER	10405	BAKER AVE	COURTNEY AVE	EAST END	E	1	AC	2	925	32	25,100	4/12/23	25	85	10	5	Surface Treatment - Slurry Seal	7/1/12
BAKER	10410	BAKER AVE	PACIFIC DR	EADINGTON AVE	E	1	AC	2	1,026	32	32,832	4/11/23	90	40	60	0	Surface Treatment - Slurry Seal	7/1/12
BAKER	10420	BAKER AVE	EADINGTON AVE	BASQUE AVE	E	1	AC	2	962	32	30,784	4/11/23	94	0	100	0	Surface Treatment - Slurry Seal	7/1/12
BAKER	10430	BAKER AVE	BASQUE AVE	ORCHARD AVE	E	1	AC	2	912	32	29,184	4/11/23	91	0	100	0	Surface Treatment - Slurry Seal	7/1/12
BAKER	10440	BAKER AVE	ORCHARD AVE	EUCLID ST	E	1	AC	2	1,440	32	46,080	4/11/23	90	0	100	0	Surface Treatment - Slurry Seal	7/1/12
BAKER	10450	BAKER AVE	EUCLID ST	LOMBARD DR	E	2	AAC	2	2,051	32	65,632	11/24/21	95	0	100	0	Overlay - AC Structural	6/1/19
BAKER	10460	BAKER AVE	LOMBARD DR	RICHMAN AVE	E	2	AAC	2	557	32	17,824	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
BAKER	10465	BAKER AVE	RICHMAN AVE	HIGHLAND AVE	E	2	AAC	2	1,300	32	41,600	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
BALBOA	10470	BALBOA RD	END	BASTANCHURY RD	E	6	AC	2	360	32	11,520	12/4/20	83	0	75	25	New Construction - Initial	1/1/80
BALCOM	10480	BALCOM AVE	CHAPMAN AVE	WILSHIRE AVE	E	3	AC	2	522	32	16,704	11/19/21	69	34	66	0	New Construction - Initial	1/1/80
BALCOM	10486	BALCOM AVE	WILSHIRE AVE	COMMONWEALTH AVE	E	3	AC	2	688	32	22,016	11/19/21	26	67	33	0	New Construction - Initial	1/1/80
BALCOM	10490	BALCOM AVE	COMMONWEALTH AVE	SANTA FE R.R. / END	E	3	AC	2	618	32	19,776	11/19/21	95	0	93	7	New Construction - Initial	1/1/80
BALCOM	10500	BALCOM AVE	TRUSLOW AVE	PATTERSON WAY	E	3	AC	2	172	32	5,504	11/22/21	95	0	100	0	Cold Mill and Overlay	1/1/17
BALCOM	10505	BALCOM AVE	PATTERSON WY	VALENCIA DR	E	3	AC	2	220	32	7,040	11/29/21	95	0	100	0	Cold Mill and Overlay	1/1/17
BALCOM	10510	BALCOM AVE	VALENCIA DR	ROSSLYNN AVE	E	3	AC	2	943	32	30,176	11/22/21	95	0	96	4	New Construction - Initial	1/1/80
BALFOU	10520	BALFOUR AVE	STATE COLLEGE BLVD	SAN CARLOS DR	E	4	AC	2	1,081	32	34,592	2/27/25	83	0	74	26	New Construction - Initial	1/1/80
BALFOU	10530	BALFOUR AVE	SAN CARLOS DR	COMMONWEALTH AVE	E	4	AC	2	791	32	25,312	2/27/25	83	0	95	5	New Construction - Initial	1/1/80
BALFOU	10535	BALFOUR AVE	COMMONWEALTH AVE	DEREK DR	E	4	AC	2	880	32	28,160	2/27/25	78	5	71	24	Surface Treatment - Slurry Seal	5/25/20
BARBAR	10540	BARBARA BLVD	END	BREA BLVD	E	5	AC	2	1,136	36	40,896	12/11/20	37	65	29	6	New Construction - Initial	1/1/80
BARCEL	10550	BARCELONA CIR	CORONADO DR	END	E	6	AC	2	334	26	8,684	4/18/25	73	15	85	0	Surface Treatment - Slurry Seal	5/25/20
BARONE	10560	BARONET PL	KINGHAM WAY	END	E	8	AC	2	616	32	19,712	4/22/25	31	53	40	7	New Construction - Initial	1/1/80
BARONE	10570	BARONET PL	FARVIEW RD	END	E	8	AC	2	437	32	13,984	4/22/25	37	60	33	7	New Construction - Initial	1/1/80
BARRIS	10580	BARRIS DR	CASA BLANCA DR	FERN DR	E	2	AC	2	1,035	28	28,980	6/1/24	100	0	0	0	Complete Reconstruction - AC	6/1/24
BASQUE	10590	BASQUE AVE	MALVERN AVE	CHAPMAN AVE	E	7	AC	2	660	32	21,120	4/23/25	82	0	77	23	Mill, Overlay w/Fabric (1.5 In)	7/1/13
BASQUE	10592	BASQUE AVE	CHAPMAN AVE	COMMONWEALTH AVE	E	7	AC	2	1,220	32	39,040	7/1/13	100	0	0	0	Mill, Overlay w/Fabric (1.5 In)	7/1/13
BASQUE	10595	BASQUE AVE	COMMONWEALTH AVE	GATE	E	7	AC	2	176	32	5,632	4/2/25	88	0	49	51	New Construction - Initial	1/1/80
BASQUE	10600	BASQUE AVE	SANTA FE R.R. / END	VALENCIA DR	E	7	AAC	2	1,603	32	51,296	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
BASQUE	10610	BASQUE AVE	VALENCIA DR	OAK AVE	E	1	AC	2	860	32	27,520	3/19/25	95	0	100	0	Complete Reconstruction - AC	6/1/18
BASQUE	10615	BASQUE AVE	OAK AVE	HILL AVE	E	1	AC	2	1,129	32	36,128	3/19/25	13	66	11	23	Surface Treatment - Slurry Seal	7/1/12
BASQUE	10620	BASQUE AVE	HILL AVE	ORANGETHORPE AVE	E	1	AC	2	555	32	17,760	3/18/25	24	84	16	0	Surface Treatment - Slurry Seal	7/1/12
BASQUE	10625	BASQUE AVE	BAKER AVE	HOUSTON AVE	E	1	AC	2	765	32	24,480	4/11/23	14	91	4	5	Surface Treatment - Slurry Seal	7/1/12
BASQUE	50190	BASQUE AVE	WOODCREST AVE	BAKER AVE	E	1	AC	2	525	32	16,800	4/17/23	55	73	27	0	Surface Treatment - Slurry Seal	7/1/12
BASQUE	50200	BASQUE AVE	ORANGETHORPE AVE	WOODCREST AVE	E	1	AC	2	270	32	8,640	4/17/23	30	86	6	8	Surface Treatment - Slurry Seal	7/1/12
BASTAN	10630	BASTANCHURY PL	BASTANCHURY RD	END	E	7	AC	2	85	68	5,780	4/9/25	55	20	45	35	New Construction - Initial	1/1/80
BAXTER	10640	BAXTER ST	VIA BURTON ST	91 FWY	E	4	AC	2	681	32	21,792	1/6/21	68	28	62	10	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
BEACON	10650	BEACON ST	END	CLAIRMONT AVE	E	4	AAC	2	338	32	10,816	4/22/25	91	0	100	0	Overlay - AC Structural	5/25/20
BEACON	10660	BEACON ST	CLAIRMONT AVE	MYSTIC AVE	E	4	AC	2	741	32	23,712	4/22/25	82	55	45	0	Surface Treatment - Slurry Seal	5/25/20
BEDFOR	10670	BEDFORD DR	DEERPARK DR	SHERWOOD AVE	E	4	AC	2	1,254	32	40,128	6/5/26	96	0	100	0	Surface Treatment - REAS	8/28/25
BEECHW	10680	BEECHWOOD AVE	FIRETHORNE AVE	LANTANA AVE	E	6	AAC	2	700	32	22,400	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
BEECHW	10690	BEECHWOOD AVE	WILLOW AVE	WOODBINE AVE	E	5	AC	2	1,111	32	35,552	11/25/20	86	0	83	17	New Construction - Initial	1/1/80
BEECHW	10700	BEECHWOOD AVE	SEQUIOA AVE	LIME AVE	E	5	AC	2	1,970	32	63,040	11/25/20	93	0	78	22	New Construction - Initial	1/1/80
BEECHW	10710	BEECHWOOD AVE	MERLIN AVE	END	E	5	AC	2	370	32	11,840	12/4/20	46	59	41	0	New Construction - Initial	1/1/80
BEECHW	10715	BEECHWOOD AVE	LIVE OAK AVE	END	E	5	AC	2	130	32	4,160	6/5/26	85	52	48	0	Surface Treatment - REAS	8/28/25
BEECHW	10720	BEECHWOOD AVE	BREA BL	SANTIAGO RD	E	5	AC	2	200	32	6,400	12/22/20	17	63	37	0	New Construction - Initial	1/1/80
BENCHLEYST	22013	BENCHLEY ST	NICOLAS ST	SHEDDON ST	E		AAC	0	1,350	36	48,000	4/18/22	100	0	0	0	New Construction - Initial	4/18/22
BENCHLEYST	22014	BENCHLEY ST	SHEDDON ST	PIONEER AVE	E		AAC	0	720	36	25,920	4/18/22	100	0	0	0	New Construction - Initial	4/18/22
BERKEA	10740	BERKELEY AVE	VALLEY VIEW DR	HARBOR BLVD	E	2	AC	3	1,520	60	91,200	12/3/21	93	0	100	0	New Construction - Initial	1/1/80
BERKEA	10750	BERKELEY AVE	CHAPMAN AVE	COMMONWEALTH AVE	E	3	AC	2	1,260	32	40,320	8/29/23	37	63	37	0	New Construction - Initial	1/1/80
BERKLC	10760	BERKELEY CIR	END	WALNUT AVE	E	3	AC	2	146	32	4,672	11/19/21	8	37	15	48	New Construction - Initial	1/1/80
BERNAR	10770	BERNARD DR	ROSARITA DR	FIRETHORNE AVE	E	6	AC	2	1,109	32	35,488	4/22/25	95	0	100	0	Surface Treatment - Slurry Seal	5/25/20
BERNAR	10780	BERNARD DR	FIRETHORNE AVE	MULBERRY AVE	E	6	AC	2	1,106	32	35,392	4/22/25	89	0	71	29	Surface Treatment - Slurry Seal	5/25/20
BEVERL	10790	BEVERLY DR	BUENA VISTA DR	MALVERN AVE	E	7	AC	2	568	32	18,176	4/2/25	82	0	100	0	Complete Reconstruction - AC	11/1/16
BIRCH	10800	BIRCH PL	EL MIRADOR DR	END	E	5	AC	2	256	32	10,692	11/25/20	80	0	100	0	Surface Treatment - Slurry Seal	8/1/18
BIRCH	10805	BIRCH PL	BEECHWOOD AVE	END	E	5	AC	2	380	32	12,160	11/25/20	84	0	50	50	New Construction - Initial	1/1/80
BISCAY	10810	BISCAYNE PL	CARLETON WAY	END	E	8	AC	2	371	32	11,872	4/17/25	68	6	94	0	New Construction - Initial	1/1/80
BLURID	10820	BLUERIDGE CT	END	MOUNTAIN RIDGE DR	E	4	AC	2	241	26	6,266	4/21/25	88	0	97	3	New Construction - Initial	1/1/80
BONITA	10830	BONITA PL	PALM ST	IMPERIAL BL	E	6	AAC	2	2,137	36	76,932	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
BONITA	10835	BONITA PL	IMPERIAL HWY	CIENAGA DR	E	6	AC	2	429	36	15,444	12/23/20	50	25	75	0	New Construction - Initial	1/1/80
BOXWOD	10840	BOXWOOD AVE	FIRETHORNE AVE	END	E	6	AAC	2	831	32	26,592	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
BRAEBU	10850	BRAEBURN AVE	DEERPARK DR	SHERWOOD AVE	E	4	AC	2	755	32	24,160	6/5/26	97	0	100	0	Surface Treatment - REAS	8/28/25
BRENTW	10860	BRENTWOOD DR	END	PANORAMA RD	E	5	AC	2	297	32	9,504	12/15/20	21	90	7	3	New Construction - Initial	1/1/80
BROOKD	10870	BROOKDALE PL	FERN DR	END	E	7	AC	2	417	28	11,676	5/8/25	84	83	17	0	New Construction - Initial	1/1/80
BROOKD	10880	BROOKDALE PL	RICHMAN AVE	HIGHLAND AVE	E	2	AC	2	1,277	32	40,864	12/17/21	46	70	29	1	New Construction - Initial	1/1/80
BROOKD	10890	BROOKDALE PL	HIGHLAND AVE	HARBOR BL	E	2	AC	2	1,240	32	39,680	12/17/21	100	0	0	0	New Construction - Initial	1/1/80
BROOKD	10895	BROOKDALE PL	HARBOR BL	E END	E	3	AAC	2	380	32	12,160	12/14/23	100	0	0	0	Surface Reconstruction - AC	12/14/23
BROOKD	10900	BROOKDALE PL	BERKELEY AVE	PRINCETON CIR EAST	E	3	AC	2	323	32	10,336	11/17/21	83	80	20	0	Surface Treatment - REAS	8/2/23
BROOKD	10905	BROOKDALE PL	PRINCETON CIR EAST	LINCOLN AVE	E	3	AAC	2	505	32	16,160	8/1/22	100	0	0	0	Overlay - AC Structural	8/1/22
BROOKD	10910	BROOKDALE PL	CORNELL AVE	END	E	3	AC	2	482	32	15,424	11/17/21	94	0	87	13	New Construction - Initial	1/1/80
BROOKD	10915	BROOKDALE PL	VICTORIA DR	E END	E	3	AAC	2	150	32	4,800	12/6/21	99	0	0	100	Overlay - AC Structural	12/2/21
BROOKD	10920	BROOKDALE PL	HARRINGTON DR	END	E	3	AC	2	519	27	14,013	12/6/21	22	90	8	2	New Construction - Initial	1/1/80
BROOKD	10930	BROOKDALE PL	SYCAMORE AVE	CONCORD AVE	E	4	AC	2	504	26	13,104	4/21/25	17	96	4	0	New Construction - Initial	1/1/80
BROOKH	10940	BROOKHURST PL	BASTANCHURY RD	END	E	7	AC	2	141	36	5,076	4/9/25	4	42	58	0	New Construction - Initial	1/1/80
BUENAV	10960	BUENA VISTA DR	BEVERLY DR	ROSE DR	E	7	AC	2	816	28	22,848	12/22/21	93	0	100	0	Complete Reconstruction - AC	11/1/16
BUENAV	10970	BUENA VISTA DR	ROSE DR	MALVERN AVE	E	7	AC	2	715	26	18,590	4/2/25	87	0	100	0	Complete Reconstruction - AC	11/1/16
BURNTR	10980	BURNING TREE RD	CLEAR CREEK DR	ISLAND DR	E	8	AC	2	505	36	18,180	3/26/25	36	22	69	9	New Construction - Initial	1/1/80
BURNTR	10985	BURNING TREE RD	ISLAND DR	PIONEER AVE	E	8	AC	2	1,027	36	36,972	3/26/25	92	0	100	0	Surface Treatment - REAS	8/2/23
BURNTR	10990	BURNING TREE RD	PIONEER AVE	FRANKLIN HILLS DR	E	8	AC	2	1,791	36	64,476	3/26/25	93	0	100	0	Surface Treatment - REAS	8/2/23
BURNTR	11000	BURNING TREE RD	FRANKLIN HILLS DR	MALVERN AVE	E	8	AC	2	650	40	26,000	3/26/25	100	0	100	0	Surface Treatment - REAS	8/4/23
BURNTR	11005	BURNING TREE RD	MALVERN AVE	MOORE AVE	E	8	AC	2	750	32	24,000	3/26/25	52	0	95	5	New Construction - Initial	1/1/80
BURNTR	11008	BURNING TREE RD	MOORE AVE	END	E	8	AC	2	440	32	14,080	1/1/80	100	0	0	0	New Construction - Initial	1/1/80
BURTPL	11010	BURT PL	CYPRESS WAY	END	E	4	AC	2	223	32	7,136	4/21/25	84	35	65	0	Surface Treatment - Slurry Seal	5/25/20
BURTON	11020	BURTON ST	RAYMOND AVE	MANHATTAN AVE	E	3	AC	2	1,454	32	46,528	12/17/21	84	0	74	26	New Construction - Initial	1/1/80
BURWOD	11030	BURWOOD ST	LAS PALMAS DR	NORTHERN CITY LIMIT	E	6	AC	2	115	32	3,680	1/7/21	29	53	42	5	New Construction - Initial	1/1/80
CABRIL	11040	CABRILLO CIR	CORONADO DR	END	E	6	AAC	2	325	28	9,100	4/18/25	78	16	84	0	Surface Treatment - Slurry Seal	5/25/20
CALAVE	11050	CALAVERA PL	END	EL RANCHO VISTA	E	8	AAC	2	659	32	21,088	4/22/25	94	0	83	17	Overlay - AC Structural	5/25/19
CALAVE	11055	CALAVERA PL	CAMINO CENTROLOMA	END	E	8	AC	2	309	32	9,888	4/21/25	73	7	93	0	New Construction - Initial	2/13/11
CALAVE	11060	CALAVERA PL	SERRANO PL	VIA CALIENTE	E	8	AAC	2	397	32	12,704	4/11/25	97	0	88	12	Overlay - AC Structural	4/1/23
CALAVE	11070	CALAVERA PL	END	CAMINO REY	E	8	AC	2	148	32	4,736	4/21/25	13	60	40	0	New Construction - Initial	1/1/80
CALALE	11080	CALLE ALEGRIA	EL RANCHO VISTA	SUNSET LN	E	8	AAC	2	776	32	24,832	4/22/25	93	0	67	33	Overlay - AC Structural	5/25/19
CALCAN	11090	CALLE CANDELA	END	EL RANCHO VISTA	E	8	AC	2	807	32	25,824	4/22/25	48	55	34	11	New Construction - Initial	1/1/80
CALMEL	11100	CALLE MELENO	END	CAMINO DEL SOL	E	8	AC	2	281	32	8,992	4/21/25	46	33	47	20	New Construction - Initial	1/1/80
CALMIR	11110	CALLE MIRANDA	END	CALAVERA PL	E	8	AAC	2	233	32	7,456	4/22/25	94	0	100	0	Overlay - AC Structural	5/25/19
CALSER	11120	CALLE SERENA	END	CAMINO CENTROLOMA	E	8	AC	2	439	32	14,048	4/21/25	17	55	43	2	New Construction - Initial	1/1/80
CALULT	11130	CALLE ULTIMO	END	CALLE SERENA	E	8	AC	2	176	32	5,632	4/21/25	32	41	59	0	New Construction - Initial	1/1/80
CAMBRI	11140	CAMBRIDGE AVE	WINCHESTER ST	BASTANCHURY RD	E	4	AC	2	1,117	32	35,744	4/22/25	81	64	36	0	Surface Treatment - Slurry Seal	5/25/20
CAMBRI	11145	CAMBRIDGE AVE	CLAIRMONT AVE	MARYMONT AVE	E	4	AAC	2	378	32	12,096	4/22/25	91	0	100	0	Overlay - AC Structural	5/25/20
CAMBRI	11150	CAMBRIDGE AVE	BASTANCHURY RD	SHERWOOD AVE	E	4	AC	2	1,142	36	41,112	4/22/25	61	45	49	6	New Construction - Initial	1/1/80
CAMEO	11160	CAMEO LN	TOPAZ LN	GARNET LN	E	4	AC	2	273	37	10,101	12/22/20	78	0	100	0	Surface Treatment - Slurry Seal	5/25/20
CAMEO	11170	CAMEO LN	GARNET LN	PEARL DR	E	4	AC	2	280	37	10,360	12/3/20	78	0	100	0	Surface Treatment - Slurry Seal	5/25/20
CAMEO	11180	CAMEO LN	PEARL DR	QUARTZ LN	E	4	AC	2	302	37	11,174	12/3/20	80	14	86	0	Surface Treatment - Slurry Seal	5/25/20
CAMEO	11190	CAMEO LN	QUARTZ LN	MADISON AVE	E	4	AC	2	798	37	29,526	4/21/25	29	49	27	24	New Construction - Initial	1/1/80
CAMIAL	11200	CAMINO ALTO	END	DOMINGO RD	E	8	AC	2	438	32	14,016	4/22/25	70	0	100	0	New Construction - Initial	1/1/80
CAMICE	11210	CAMINO CENTROLOMA	N END	ROSECRANS AVE	E	8	AC	2	778	32	24,896	4/21/25	13	57	35	8	New Construction - Initial	1/1/80
CAMICE	11220	CAMINO CENTROLOMA	ROSECRANS AVE	MARIPOSA LN	E	8	AC	2	1,384	32	44,288	4/21/25	61	47	53	0	New Construction - Initial	1/1/80
CAMICE	11230	CAMINO CENTROLOMA	MARIPOSA LN	PIONEER AVE	E	8	AC	2	486	32	15,552	4/21/25	38	48	46	6	New Construction - Initial	1/1/80
CAMISO	11240	CAMINO DEL SOL	PARKS RD	ARMSTEAD LN	E	8	AC	2	2,072	32	66,304	4/11/25	38	48	46	6	New Construction - Initial	1/1/80
CAMISO	11250	CAMINO DEL SOL	ARMSTEAD LN	NICOLAS DR	E	8	AC	2	1,409	32	45,088	4/11/25	27	57	34	9	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
CAMISO	11260	CAMINO DEL SOL	NICOLAS DR	ROSECRANS AVE	E	8	AC	2	1,261	32	40,352	4/11/25	11	61	27	12	New Construction - Initial	1/1/80
CAMISO	11265	CAMINO DEL SOL	PASEO DORADO	DOMINGO RD	E	8	AC	2	430	32	13,760	4/18/25	87	0	100	0	New Construction - Initial	1/1/80
CAMIES	11270	CAMINO ESCONDIDO	CALLE CANDELA	END	E	8	AC	2	567	32	18,144	4/22/25	68	7	71	22	New Construction - Initial	1/1/80
CAMIVI	11280	CAMINO LA VISTA	MESA VERDE	GRISSOM PARK DR	E	8	AC	2	261	32	8,352	4/22/25	20	59	32	9	New Construction - Initial	1/1/80
CAMIVI	11285	CAMINO LA VISTA	GRISSOM PARK DR	ROSECRANS AVE	E	8	AC	2	687	32	21,984	4/22/25	19	60	31	9	New Construction - Initial	1/1/80
CAMIVI	11288	CAMINO LA VISTA	ROSECRANS AVE	PASEO DORADO	E	8	AC	2	920	32	29,440	4/18/25	28	54	32	14	New Construction - Initial	1/1/80
CAMIVI	11290	CAMINO LA VISTA	END	DOMINGO RD	E	8	AC	2	245	32	7,840	4/22/25	68	0	98	2	New Construction - Initial	1/1/80
CAMILO	11300	CAMINO LOMA	ROSECRANS AVE	END	E	8	AC	2	155	32	4,960	4/3/26	100	0	0	0	Complete Reconstruction - AC	4/3/26
CAMILO	11310	CAMINO LOMA	END	DOMINGO RD	E	8	AC	2	374	32	11,968	4/22/25	77	0	98	2	New Construction - Initial	1/1/80
CAMIRO	11320	CAMINO LOS ROBLES	END	DOMINGO RD	E	8	AC	2	229	32	7,328	4/22/25	76	0	95	5	New Construction - Initial	1/1/80
CAMIMO	11330	CAMINO MONTE	CAMINO DEL SOL	END	E	8	AC	2	248	32	7,936	4/21/25	28	45	49	6	New Construction - Initial	1/1/80
CAMIRC	11340	CAMINO RECONDITO	AVENIDA SELVA	END	E	8	AC	2	362	32	11,584	4/22/25	14	65	28	7	New Construction - Initial	1/1/80
CAMIRY	11350	CAMINO REY	CAMINO DEL SOL	AVENIDA SAN LORENZO	E	8	AC	2	1,984	32	79,808	4/21/25	37	57	33	10	New Construction - Initial	1/1/80
CAMIRY	11360	CAMINO REY	AVENIDA SAN LORENZO	ROSECRANS AVE	E	8	AC	2	919	32	29,408	4/21/25	35	69	31	0	New Construction - Initial	1/1/80
CANDLW	11370	CANDLEWOOD DR	END	LARKWOOD DR	E	8	AC	2	1,102	32	35,264	4/17/25	24	57	30	13	New Construction - Initial	1/1/80
CANNON	11380	CANNON LN	LEMON ST	LUANNE AVE	E	5	AC	2	653	26	16,978	4/15/25	73	25	51	24	New Construction - Initial	1/1/80
CANNON	11385	CANNON LN	LUANNE AVE	SHEPPARD DR	E	5	AC	2	195	26	5,070	1/6/21	48	64	28	8	New Construction - Initial	1/1/80
CANYON	11400	CANYON DR	ROSECRANS AVE	SUNSET LN	E	8	AAC	2	1,065	32	34,080	4/22/25	94	0	57	43	Overlay - AC Structural	5/25/19
CANYON	11410	CANYON DR	LOMA VERDE DR	LOMA ALTA DR	E	8	AC	2	1,058	32	33,856	4/11/25	93	0	32	68	Complete Reconstruction - AC	10/1/20
CANYON	11420	CANYON DR	LOMA ALTA DR	S END	E	8	AC	2	331	32	10,592	4/11/25	94	0	42	58	Complete Reconstruction - AC	10/1/20
CAPIST	11430	CAPISTRANO CIR	CORONADO DR	END	E	6	AAC	2	336	32	10,752	4/18/25	71	11	89	0	Surface Treatment - Slurry Seal	5/25/20
CARHAR	11440	CARHART AVE	VALLEY VIEW DR	MALVERN AVE	E	7	AC	2	2,056	28	57,568	4/25/23	90	0	94	6	New Construction - Initial	1/1/80
CARLET	11450	CARLETON WAY	PIONEER AVE	GREENHILL DR	E	8	AC	2	123	32	3,936	4/17/25	23	69	31	0	New Construction - Initial	1/1/80
CARLET	11460	CARLETON WAY	GREENHILL DR	TRIESTE WAY	E	8	AC	2	1,000	32	32,000	4/17/25	20	71	23	6	New Construction - Initial	1/1/80
CAROL	11470	CAROL DR	END	MAGNOLIA AVE	E	7	AC	2	1,732	32	55,424	4/20/23	89	14	49	37	New Construction - Initial	1/1/80
CAROL	11480	CAROL DR	VERMONT AVE	GILBERT ST	E	7	AC	2	1,322	32	42,304	4/27/23	86	69	28	3	New Construction - Initial	1/1/80
CAROL	11490	CAROL DR	GILBERT ST	END	E	7	AC	2	1,832	32	58,624	4/27/23	88	0	28	72	New Construction - Initial	1/1/80
CARRIA	11500	CARRIAGE PL	END	TERRAZA PL	E	6	AC	2	195	32	6,240	12/3/20	98	0	100	0	Surface Treatment - Slurry Seal	5/25/20
CASBLA	11510	CASA BLANCA DR	FERN DR	END	E	2	AC	2	745	28	20,860	5/8/25	70	81	8	11	Surface Treatment - Slurry Seal	6/1/24
CASBLA	11520	CASA BLANCA DR	END	MALVERN AVE	E	2	AC	2	625	32	20,000	12/20/21	22	91	9	0	New Construction - Initial	1/1/80
CASTLW	11530	CASTLEWOOD DR	GILBERT ST	PARKS RD	E	8	AC	2	1,295	32	41,440	4/22/25	49	26	73	1	New Construction - Initial	1/1/80
CATLIN	11540	CATALINA RD	SANTA BARBARA AVE	DOMINGO RD	E	6	AC	2	1,983	32	37,120	4/18/25	82	0	100	0	Surface Treatment - Slurry Seal	5/25/20
CATLIN	11550	CATALINA RD	CORONADO DR	E END	E	6	AC	2	310	32	9,920	12/30/20	11	92	8	0	New Construction - Initial	1/1/80
CEDAR	11560	CEDAR AVE	WALNUT AVE	VALENCIA DR	E	7	AC	2	475	32	15,200	4/27/23	94	0	100	0	New Construction - Initial	1/1/80
CEDAR	11570	CEDAR AVE	FLOWER AVE	SOUTHGATE AVE	E	1	AC	2	665	32	21,280	4/18/23	55	65	22	13	Surface Treatment - Slurry Seal	7/1/12
CEDAR	11575	CEDAR AVE	SOUTHGATE AVE	ORANGETHORPE AVE	E	1	AC	2	730	32	23,360	4/18/23	61	73	20	7	Surface Treatment - Slurry Seal	7/1/12
CEDAR	11580	CEDAR AVE	ORANGETHORPE AVE	BAKER AVE	E	1	AC	2	630	32	20,160	4/12/23	22	72	28	0	Surface Treatment - Slurry Seal	7/1/12
CELEST	11590	CELESTE LN	PARKS RD	CONEJO LN	E	8	AC	2	1,417	32	45,344	4/23/25	29	58	37	5	New Construction - Initial	1/1/80
CENTRA	11600	CENTRAL AVE	RAYMOND AVE	END	E	3	AC	2	440	32	14,080	5/8/25	99	0	100	0	Surface Treatment - REAS	11/1/24
CENTRA	11610	CENTRAL AVE	HART PL	ACACIA AVE	E	3	AC	2	1,240	32	39,680	12/6/21	94	0	100	0	New Construction - Initial	1/1/80
CENTRA	11615	CENTRAL AVE	ACACIA AVE	E END	E	4	AC	2	210	28	5,880	4/15/25	49	51	42	7	New Construction - Initial	1/1/80
CENTRA	11620	CENTRAL AVE	HALE AVE	END	E	4	AC	2	635	32	20,320	12/10/20	10	97	3	0	New Construction - Initial	1/1/80
CERRIT	11630	CERRITOS DR	RICHMAN KNOLL	EL CAMINO DR	E	7	AC	2	1,580	32	50,560	4/9/25	8	59	3	38	New Construction - Initial	1/1/80
CHAPMA	11640	CHAPMAN AVE	END (CHAPMAN ALLEY)	DIANA PL	E	7	AC	2	1,660	32	53,120	4/23/25	95	0	100	0	Reconstruct Surface (AC)	7/1/11
CHAPMA	11650	CHAPMAN AVE	DIANA PL	BASQUE AVE	E	7	AC	2	890	32	28,480	4/1/25	92	0	100	0	Reconstruct Surface (AC)	7/1/11
CHAPMA	11651	CHAPMAN AVE	BASQUE AVE	MICHAEL AVE	E	7	AAC	2	876	32	28,032	4/1/25	81	76	24	0	Overlay - AC Structural	5/25/20
CHAPMA	11660	CHAPMAN AVE	MICHAEL AVE	EUCLID ST	E	7	AAC	2	1,685	32	53,920	8/29/23	97	0	100	0	Overlay - AC Structural	5/25/20
CHAPMA	11670	CHAPMAN AVE	EUCLID ST	WOODS AVE	E	2	AC	2	1,275	32	40,800	12/20/21	33	81	10	9	New Construction - Initial	1/1/80
CHAPFRONT	70000	CHAPMAN AVE (FRONTAGE)	CLARKE AVE	COMMONWEALTH AVE	E	4	AC	2	575	30	17,250	12/7/23	95	0	100	0	New Construction - AC	1/1/80
CHAPFRONT	70010	CHAPMAN AVE (FRONTAGE)	COMMONWEALTH AVE	DEER DR	E	4	AC	2	955	30	28,650	12/7/23	79	41	52	7	New Construction - AC	1/1/80
CHARLE	11680	CHARLES AVE	SAN ANTONIO AVE	ROLLING HILLS DR	E	6	AC	2	590	32	18,880	4/22/25	91	0	96	4	Surface Treatment - Slurry Seal	5/25/20
CHERRY	11690	CHERRY AVE	VINE AVE	PAULA DR	E	1	AC	2	1,860	32	59,520	4/18/23	91	0	94	6	Surface Treatment - Slurry Seal	7/1/12
CHERRY	11700	CHERRY AVE	PINE AVE	COURTNEY AVE	E	1	AC	2	990	32	31,680	4/12/23	51	65	28	7	Surface Treatment - Slurry Seal	7/1/12
CHERRY	11705	CHERRY AVE	COURTNEY AVE	CEDAR AVE	E	1	AC	2	200	32	6,400	4/18/23	19	96	4	0	Surface Treatment - Slurry Seal	7/1/12
CHERRY	11710	CHERRY AVE	CEDAR AVE	HAWTHORNE AVE	E	1	AC	2	700	32	22,400	4/18/23	32	79	21	0	Surface Treatment - Slurry Seal	7/1/12
CHESTN	11720	CHESTNUT PL	COMMONWEALTH AVE	END	E	2	AC	2	535	32	17,120	12/2/21	95	0	100	0	Complete Reconstruction - AC	10/1/20
CIELO	11730	CIELO PL	END	CIENAGA DR	E	6	AC	2	325	32	10,400	4/18/25	70	49	51	0	Surface Treatment - Slurry Seal	5/25/20
CIENAG	11740	CIENAGA DR	ARAGON PL	TERMINO PL	E	6	AC	2	1,760	32	56,320	12/23/20	32	71	29	0	New Construction - Initial	1/1/80
CIENAG	11750	CIENAGA DR	MADONNA DR	PUENTE ST	E	6	AC	2	1,170	32	37,440	12/23/20	30	76	16	8	New Construction - Initial	1/1/80
CITRUS	11760	CITRUS AVE	COMMONWEALTH AVE	SANTA FE R.R. / END	E	7	AC	2	560	32	17,920	4/1/25	82	0	96	4	New Construction - Initial	1/1/80
CITRUS	11770	CITRUS AVE	OLIVE AVE	ELM AVE	E	1	AAC	2	260	32	8,320	4/16/22	100	0	0	0	Overlay - AC Structural	4/16/22
CITRUS	11771	CITRUS AVE	ELM AVE	ASH AVE	E	1	AAC	2	590	32	18,880	4/16/22	100	0	0	0	Overlay - AC Structural	4/16/22
CITRUS	11772	CITRUS AVE	ASH AVE	WEST AVE	E	1	AAC	2	320	32	10,240	4/16/22	100	0	0	0	Overlay - AC Structural	4/16/22
CITRUS	11780	CITRUS AVE	HILL AVE	PORTER AVE	E	1	AC	2	260	32	8,320	3/18/25	89	16	84	0	Surface Treatment - Slurry Seal	7/1/12
CITRUS	11790	CITRUS AVE	PORTER AVE	ORANGETHORPE AVE	E	1	AC	2	265	24	6,360	3/18/25	41	83	17	0	New Construction - Initial	1/1/80
CITRUS	11800	CITRUS AVE	ORANGETHORPE AVE	WOODCREST AVE	E	1	AC	2	315	32	25,920	4/17/23	57	50	25	25	Surface Treatment - Slurry Seal	7/1/12
CITRUS	11810	CITRUS AVE	BAKER AVE	HOUSTON AVE	E	1	AC	2	640	32	20,480	4/11/23	14	84	4	12	Surface Treatment - Slurry Seal	7/1/12
CITRUS	50130	CITRUS AVE	WOODCREST AVE	BAKER AVE	E	1	AC	2	507	32	16,224	4/17/23	23	88	9	3	Surface Treatment - Slurry Seal	7/1/12
CLAIRE	11820	CLAIRE AVE	END	MARION BLVD	E	5	AAC	2	350	21	7,350	10/29/24	100	0	0	0	Overlay - AC Structural	10/29/24
CLARMT	11830	CLAIRMONT AVE	CAMBRIDGE AVE	PLACENTIA AVE	E	4	AAC	2	1,195	37	44,215	4/22/25	90	0	100	0	Overlay - AC Structural	5/25/20
CLARIO	11840	CLARION DR	LAKEVIEW DR	TERRAZA PL	E	6	AC	2	1,200	32	38,400	12/11/20	86	0	58	42	New Construction - Initial	1/1/80
CLARKE	11850	CLARKE AVE	STATE COLLEGE BLVD	CHAPMAN AVE	E	4	AAC	2	1,355	32	43,360	9/15/24	100	0	0	0	Overlay - AC Structural	9/15/24

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
CLEACR	11860	CLEAR CREEK DR	END	ISLAND DR	E	8	AC	2	1,570	32	50,240	3/26/25	32	52	37	11	New Construction - Initial	1/1/80
COLLEG	11865	COLLEGE PL	CORNELL AVE	STANFORD AVE	E	3	AC	2	230	32	7,360	11/17/21	95	0	100	0	New Construction - Initial	1/1/80
COLLEG	11870	COLLEGE PL	TITAN DR	COMMONWEALTH AVE	E	4	AC	2	520	32	16,640	4/16/25	66	43	57	0	New Construction - Initial	1/1/80
COLLEG	11875	COLLEGE PL	COMMONWEALTH AVE	LANGSDORF DR	E	4	AC	2	525	32	16,800	4/16/25	74	33	59	8	New Construction - Initial	1/1/80
CONCOR	11880	CONCORD AVE	OLD RIVER RD	END	E	5	AC	2	910	32	60,640	5/8/25	80	59	41	0	New Construction - Initial	1/1/80
CONCOR	11890	CONCORD AVE	VIRGINIA RD	END	E	5	AC	2	660	32	21,120	11/24/20	20	89	8	3	New Construction - Initial	1/1/80
CONCOR	11900	CONCORD AVE	END	SYCAMORE AVE	E	4	AC	2	1,170	32	37,440	11/24/20	32	62	37	1	New Construction - Initial	1/1/80
CONCOR	11905	CONCORD AVE	AMERIGE AVE	N END	E	4	AC	2	540	32	19,600	5/14/25	89	25	75	0	New Construction - Initial	1/1/80
CONEJO	11910	CONEJO LN	SUNRISE LN	CAMINO CENTROLOMA	E	8	AC	2	549	32	17,568	4/21/25	92	0	100	0	Complete Reconstruction - AC	10/1/20
CONEJO	11912	CONEJO LN	CAMINO CENTROLOMA	PARKS RD	E	8	AC	2	1,336	32	42,752	4/23/25	10	73	26	1	New Construction - Initial	1/1/80
CONEJO	11920	CONEJO LN	END	CAMINO LA VISTA	E	8	AC	2	555	32	17,760	4/22/25	25	68	27	5	New Construction - Initial	1/1/80
CORNEL	11930	CORNELL AVE	DOROTHY LN	GLENWOOD AVE	E	3	AC	2	700	32	22,400	11/17/21	84	27	73	0	New Construction - Initial	1/1/80
CORNEL	11940	CORNELL AVE	NUTWOOD AVE	CHAPMAN AVE	E	3	AC	2	1,255	32	40,160	11/17/21	93	0	65	35	New Construction - Initial	1/1/80
CORNEL	11950	CORNELL AVE	CHAPMAN AVE	COMMONWEALTH AVE	E	3	AC	2	1,245	32	39,840	11/19/21	37	0	93	7	Surface Treatment - Slurry Seal	6/1/24
CORNEL	11955	CORNELL AVE	COMMONWEALTH AVE	WALNUT AVE	E	3	AC	2	700	32	22,400	11/19/21	87	0	100	0	MILL and OVERLAY	7/1/12
CORONA	11956	CORONADO DR	N END	LAS PALMAS DR	E	6	AC	2	550	32	17,600	5/9/25	96	0	100	0	Surface Treatment - Cape Seal	12/1/24
CORONA	11960	CORONADO DR	END	CAPISTRANO CIR	E	6	AC	2	1,860	32	59,520	4/18/25	76	12	85	3	Surface Treatment - Slurry Seal	5/25/20
CORONA	11970	CORONADO DR	END	LAGUNA RD	E	6	AC	2	1,790	32	57,280	12/4/20	17	84	15	1	New Construction - Initial	1/1/80
COSTA	11980	COSTA CT	END	SANTA CLARA AVE	E	4	AAC	2	220	26	5,720	9/8/24	100	0	0	0	Overlay - AC Structural	9/8/24
COURTN	12010	COURTNEY AVE	VALENCIA DR	OAK AVE	E	1	AC	2	840	32	26,880	4/18/23	64	52	34	14	Surface Treatment - Slurry Seal	7/1/12
COURTN	12015	COURTNEY AVE	OAK AVE	CHERRY AVE	E	1	AC	2	935	32	29,920	4/18/23	35	85	14	1	Surface Treatment - Slurry Seal	7/1/12
COURTN	12020	COURTNEY AVE	CHERRY AVE	ORANGETHORPE AVE	E	1	AC	2	775	32	24,800	4/18/23	35	68	19	13	Surface Treatment - Slurry Seal	7/1/12
COURTN	12030	COURTNEY AVE	ORANGETHORPE AVE	ROBERTA AVE	E	1	AC	2	1,065	32	22,720	4/12/23	34	76	16	8	New Construction - Initial	1/1/80
COURTN	12040	COURTNEY AVE	MAXZIM AVE	HOUSTON AVE	E	1	AC	2	260	32	8,320	4/12/23	27	83	16	1	Surface Treatment - Slurry Seal	7/1/12
COURTP	12050	COURTNEY PL	WALNUT AVE	HOUSTON AVE	E	7	AC	2	240	32	7,680	4/27/23	93	0	100	0	New Construction - Initial	1/1/80
COYOTE	12060	COYOTE HILLS DR	END	GILBERT ST	E	8	AC	2	1,520	36	54,720	5/14/25	84	0	96	4	Surface Treatment - Slurry Seal	6/1/24
COYOTE	12070	COYOTE HILLS DR	GILBERT ST	OPEN SKY DR	E	8	AC	2	1,250	36	45,000	5/14/25	80	73	27	0	Surface Treatment - Slurry Seal	6/1/24
COYOTE	12080	COYOTE HILLS DR	OPEN SKY DR	VINTAGE WAY	E	8	AC	2	1,825	36	65,700	5/14/25	76	70	30	0	Surface Treatment - Slurry Seal	6/1/24
COYOTE	12090	COYOTE HILLS DR	VINTAGE WAY	CASTLEWOOD DR	E	8	AC	2	1,500	36	54,000	5/14/25	89	0	91	9	Surface Treatment - Slurry Seal	6/1/24
CRESVW	12100	CRESTVIEW DR	END	VALENCIA MESA DR	E	7	AC	2	863	29	25,027	5/8/25	75	62	25	13	Surface Treatment - REAS	8/3/24
CRESVW	12110	CRESTVIEW DR	VALENCIA MESA DR	1085' S/ VALENCIA MESA DR	E	7	AC	2	1,087	25	27,175	12/22/21	23	45	26	29	New Construction - Initial	1/1/80
CRESVW	12111	CRESTVIEW DR	1085' S/ VALENCIA MESA DR	LA MESA DR	E	7	AC	2	406	24	10,544	4/2/25	79	0	100	0	New Construction - Initial	1/1/80
CRISTI	12120	CRISTINE PL	VALENCIA MESA DR	END	E	7	AC	2	180	26	4,680	4/23/25	15	55	37	8	New Construction - Initial	1/1/80
CROWN	12130	CROWN WAY	SUNNY RIDGE DR	END	E	8	AAC	2	720	32	23,040	5/5/25	100	0	0	0	Overlay - AC Structural	5/5/25
CRYSTA	12140	CRYSTAL PL	CHERRY AVE	END	E	1	AC	2	160	32	5,120	4/18/23	94	0	79	21	Surface Treatment - Slurry Seal	7/1/12
CYPRSA	12150	CYPRESS AVE	ALMIRA AVE	END	E	4	AC	2	290	24	6,960	1/6/21	49	85	15	0	New Construction - Initial	1/1/80
CYPRSW	12160	CYPRESS WAY	STATE COLLEGE BLVD	END	E	4	AC	2	776	32	27,832	4/21/25	59	68	32	0	Surface Treatment - Slurry Seal	5/25/20
DALEPL	12170	DALE PL	ARTESIA AVE	END	E	7	AC	2	210	32	6,720	3/26/25	32	44	56	0	New Construction - Initial	1/1/80
DANAPL	12210	DANA PL	NW END	LINDENDALE AVE	E	5	AC	2	1,070	32	34,240	12/22/20	43	60	37	3	New Construction - Initial	1/1/80
DANAPL	12220	DANA PL	LINDENDALE AVE	E END	E	5	AC	2	430	32	13,760	1/6/21	61	59	41	0	New Construction - Initial	1/1/80
DANAPL	12230	DANA PL	ACACIA AVE	END	E	5	AC	2	540	32	17,280	4/16/25	25	68	28	4	New Construction - Initial	1/1/80
DANAPL	12240	DANA PL	END	MOUNTAIN VIEW PL	E	5	AC	2	520	32	16,640	12/10/20	44	72	26	2	New Construction - Initial	1/1/80
DAPHNE	12250	DAPHNE PL	W END	GILBERT ST	E	8	AC	2	740	32	23,680	4/17/25	38	63	37	0	New Construction - Initial	1/1/80
DAWNS	12260	DAWNS WAY	ACACIA AVE	END	E	4	AC	2	440	32	14,080	1/6/21	53	26	58	16	New Construction - Initial	1/1/80
DEERPK	12270	DEERPARK DR	TREEVIEW PL	EUCALYPTUS PL	E	4	AC	2	715	32	22,955	11/25/20	76	43	52	5	Surface Treatment - Slurry Seal	5/25/20
DEERPK	12275	DEERPARK DR	EUCALYPTUS PL	DEVONSHIRE AVE	E	4	AC	2	1,320	32	43,262	11/25/20	76	43	52	5	Surface Treatment - Slurry Seal	5/25/20
DEERPK	12280	DEERPARK DR	AMHERST AVE	END	E	4	AC	2	1,283	32	41,056	6/5/26	99	0	100	0	Surface Treatment - REAS	8/28/25
DEERPK	12290	DEERPARK DR	GARNET LN	MADISON AVE	E	4	AC	2	1,620	37	59,940	2/27/25	83	0	36	64	New Construction - Initial	1/1/80
DELCER	12300	DEL CERRO PL	POTRERO AVE	DEL CERRO PL	E	6	AC	2	350	32	11,200	12/30/20	31	59	18	23	New Construction - Initial	1/1/80
DELMON	12310	DEL MONTE WEST	RICHMAN AVE	EL DORADO DR	E	2	AC	2	330	32	10,560	12/17/21	87	0	100	0	New Construction - Initial	1/1/80
DELMON	12315	DEL MONTE WEST	EL DORADO DR	FORD AVE	E	2	AC	2	491	32	15,712	12/17/21	37	36	63	1	New Construction - Initial	1/1/80
DELORO	12320	DEL ORO LN	END	ARBOLADO DR	E	6	AAC	2	300	32	9,600	12/1/20	99	0	100	0	Overlay - AC Structural	8/1/17
DELRIO	12330	DEL RIO WAY	END	CERRITOS DR	E	7	AAC	2	190	32	6,080	10/28/25	100	0	0	0	Overlay - AC Structural	10/28/25
DELHI	12340	DELHI PL	END	ASH AVE	E	1	AC	2	170	32	5,440	3/19/25	33	81	19	0	New Construction - Initial	1/1/80
DELPHN	12350	DELPHINE PL	END	FERN DR	E	7	AC	2	330	26	8,580	4/25/23	29	68	14	18	New Construction - Initial	1/1/80
DELPHN	12360	DELPHINE PL	JACARANDA PL	CHAPMAN AVE	E	7	AC	2	580	26	15,080	4/1/25	56	67	33	0	New Construction - Initial	1/1/80
DEREK	12370	DEREK DR	BASTANCHURY RD	END	E	4	AC	2	1,860	32	59,520	11/24/20	88	0	100	0	Surface Treatment - Slurry Seal	5/25/20
DEREK	12380	DEREK DR	END	SANTA CLARA AVE	E	4	AC	2	2,031	32	64,992	4/14/25	45	51	41	8	New Construction - Initial	1/1/80
DEVNSH	12390	DEVONSHIRE AVE	DEERPARK DR	HARTFORD AVE	E	4	AC	2	850	32	27,200	11/25/20	27	58	37	5	New Construction - Initial	1/1/80
DIANA	12400	DIANA PL	JACARANDA PL	END	E	7	AC	2	960	26	24,960	4/23/25	94	0	32	68	Reconstruct Surface (AC)	7/1/11
DOLORE	12410	DOLORES DR	END	MARGARITA DR	E	7	AC	2	310	28	8,680	5/8/25	87	55	27	18	Surface Treatment - REAS	8/16/24
DOMNGP	12420	DOMINGO PL	DOMINGO RD	END	E	6	AC	2	200	32	6,400	1/6/21	22	85	8	7	New Construction - Initial	1/1/80
DOMNGR	12430	DOMINGO RD	TERRAZA PL	SANTA BARBARA AVE	E	6	AC	2	1,840	32	58,880	12/11/20	20	87	5	8	New Construction - Initial	1/1/80
DOMNGR	12440	DOMINGO RD	SANTA BARBARA AVE	LAGUNA RD	E	6	AC	2	1,867	32	59,744	12/11/20	29	63	28	9	New Construction - Initial	1/1/80
DOMNGR	12450	DOMINGO RD	LAGUNA RD	JOSE WAY	E	6	AC	2	1,190	32	38,080	12/3/20	46	53	35	12	New Construction - Initial	1/1/80
DOMNGR	12460	DOMINGO RD	JOSE WAY	TERRAZA PL	E	6	AC	2	1,430	32	45,760	12/30/20	47	39	49	12	New Construction - Initial	1/1/80
DOMNGR	12470	DOMINGO RD	TERRAZA PL	VERONA DR	E	6	AC	2	770	32	24,640	12/30/20	59	22	31	47	New Construction - Initial	1/1/80
DOMNGR	12480	DOMINGO RD	PASEO DORADO	CAMINO DEL SOL	E	8	AC	2	1,900	32	60,800	4/18/25	62	55	42	3	New Construction - Initial	1/1/80
DORTHD	12490	DOROTHY DR	END	HORNET WAY	E	3	AC	2	1,095	32	35,040	11/17/21	49	36	45	19	New Construction - Initial	1/1/80
DORTHL	12495	DOROTHY LN	HORNET WY	LONGVIEW DR	E	3	AC	2	941	36	33,876	11/15/21	91	0	100	0	New Construction - Initial	3/1/11
DORTHL	12500	DOROTHY LN	LONGVIEW DR	RAYMOND AVE	E	5	AC	2	1,690	32	54,080	4/15/25	77	44	55	1	New Construction - Initial	1/1/80
DORTHL	12510	DOROTHY LN	RAYMOND AVE	FERNDALE AVE	E	5	AC	2	1,705	36	61,380	4/15/25	73	24	66	10	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
DORTHL	12515	DOROTHY LN	FERNDALE AVE	ACACIA AVE	E	5	AAC	2	951	36	31,680	8/28/25	100	0	0	0	Overlay - AC Structural	8/28/25
DORTHL	12520	DOROTHY LN	ACACIA AVE	VICTORIA DR	E	5	AC	2	880	36	31,680	4/15/25	78	44	56	0	New Construction - Initial	1/1/80
DORTHL	12530	DOROTHY LN	VICTORIA DR	STATE COLLEGE BLVD	E	5	AC	3	1,745	37	64,565	4/15/25	79	28	55	17	New Construction - Initial	1/1/80
DRAKE	12540	DRAKE AVE	UNION AVE	END	E	2	AC	2	1,336	32	42,752	12/20/21	100	0	0	0	Complete Reconstruction - AC	5/25/20
DRAKE	12550	DRAKE AVE	CHAPMAN AVE	COMMONWEALTH AVE	E	2	AC	2	1,228	32	39,296	12/2/21	74	72	28	0	New Construction - Initial	1/1/80
DRFTWD	12560	DRIFTWOOD	PANORAMA RD	END	E	5	AC	2	290	32	9,280	1/6/21	17	79	16	5	New Construction - Initial	1/1/80
EADING	12570	EADINGTON AVE	VALENCIA DR	FLOWER AVE	E	1	AC	2	1,275	32	40,800	4/17/25	22	55	33	12	Surface Treatment - Slurry Seal	7/1/12
EADING	12580	EADINGTON AVE	FLOWER AVE	SOUTHGATE AVE	E	1	AC	2	560	32	17,920	3/19/25	16	91	9	0	Surface Treatment - Slurry Seal	7/1/12
EADING	12585	EADINGTON AVE	SOUTHGATE AVE	ORANGETHORPE AVE	E	1	AC	2	700	32	22,400	3/19/25	19	73	27	0	Surface Treatment - Slurry Seal	7/1/12
EADING	12590	EADINGTON AVE	ORANGETHORPE AVE	BAKER AVE	E	1	AC	2	885	32	28,320	4/17/23	80	69	31	0	Surface Treatment - Slurry Seal	7/1/12
EADING	12595	EADINGTON AVE	BAKER AVE	HOUSTON AVE	E	1	AC	2	725	32	23,200	4/11/23	83	53	47	0	New Construction - Initial	1/1/80
EASRDG	12600	EASTRIDGE KNOLL	END	VALLEY VIEW DR	E	7	AC	2	220	28	6,160	4/8/25	87	62	32	6	New Construction - Initial	1/1/80
EDGARA	12610	EDGAR AVE	SUDENE AVE	END	E	3	AC	2	350	27	9,450	5/14/25	92	0	100	0	Surface Treatment - Slurry Seal	6/1/24
EDGARP	12620	EDGAR PL	END	GLENWOOD AVE	E	3	AC	2	110	51	5,610	11/15/21	84	0	90	10	New Construction - Initial	1/1/80
EDGCLF	12630	EDGECLIFF DR	KROEGER AVE	RAYMOND AVE	E	5	AC	2	430	32	13,760	1/6/21	20	82	12	6	New Construction - Initial	1/1/80
EDWARD	12640	EDWARD AVE	COMMONWEALTH AVE	CAROL DR	E	7	AC	2	510	32	16,320	4/20/23	85	0	25	75	New Construction - Initial	1/1/80
EDWARD	12645	EDWARD AVE	CAROL DR	VALENCIA DR	E	7	AC	2	712	32	22,784	4/20/23	91	24	70	6	New Construction - Initial	1/1/80
EGERER	12650	EGERER PL	LAS PALMAS DR	HERMOSA DR	E	6	AAC	2	895	32	17,920	10/5/24	100	0	0	0	Overlay - AC Structural	10/5/24
ELADOB	12660	EL ADOBE PL	END	SUNNY WOOD DR	E	6	AC	2	490	32	15,680	5/9/25	90	0	100	0	Surface Treatment - Slurry Seal	6/1/24
ELCAMI	12670	EL CAMINO DR	CERRITOS DR	RICHMAN AVE	E	7	AC	2	295	32	10,640	4/9/25	22	49	22	29	New Construction - Initial	1/1/80
ELCAMI	12675	EL CAMINO DR	RICHMAN AVE	GLENHAVEN AVE	E	7	AAC	2	290	32	9,280	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
ELDORA	12680	EL DORADO DR	HIGHLAND AVE	VALLEY VIEW DR	E	7	AC	2	1,135	32	36,320	4/8/25	22	78	12	10	New Construction - Initial	1/1/80
ELDORA	12690	EL DORADO DR	VALLEY VIEW DR	DEL MONTE WEST	E	2	AC	2	1,520	32	48,640	12/3/21	85	45	55	0	New Construction - Initial	1/1/80
ELMIRA	12700	EL MIRADOR DR	TWILIGHT DR	MADONNA DR	E	6	AAC	2	943	32	30,176	11/25/20	95	0	16	84	Overlay - AC Structural	8/1/17
ELMIRA	12705	EL MIRADOR DR	MADONNA DR	ARBOLADO DR	E	6	AC	2	975	32	31,200	11/25/20	94	0	100	0	Cold Mill and Overlay	8/1/17
ELMIRA	12710	EL MIRADOR DR	PUENTE ST	FIRETHORNE AVE	E	6	AC	2	670	32	21,440	4/22/25	90	28	72	0	Surface Treatment - Slurry Seal	5/25/20
ELMIRA	12715	EL MIRADOR DR	PUENTE ST	W END	E	6	AC	2	110	33	3,630	12/15/20	28	69	31	0	New Construction - Initial	1/1/80
ELMIRA	12720	EL MIRADOR DR	LANTANA AVE	MULBERRY AVE	E	6	AC	2	889	32	28,448	12/4/20	86	0	100	0	Surface Treatment - Slurry Seal	5/25/20
ELMIRA	12725	EL MIRADOR DR	BREA BLVD	HEMLOCK PL	E	5	AC	2	1,035	32	33,120	4/22/25	84	0	100	0	Surface Treatment - Slurry Seal	8/1/18
ELMIRA	12730	EL MIRADOR DR	HEMLOCK PL	SPRUCE PL	E	5	AC	2	551	32	17,632	4/22/25	86	0	61	39	Cold Mill and Overlay	8/1/18
ELMIRA	12735	EL MIRADOR DR	SPRUCE PL	END	E	5	AC	2	370	32	11,840	4/22/25	82	0	100	0	Surface Treatment - Slurry Seal	8/1/18
ELPASO	12740	EL PASO LN	CELESTE LN	PARKS RD	E	8	AC	2	845	32	27,040	4/23/25	38	43	54	3	New Construction - Initial	1/1/80
ELPASO	12750	EL PASO LN	W END	CAMINO LA VISTA	E	8	AC	2	285	32	9,120	4/22/25	15	65	28	7	New Construction - Initial	1/1/80
ELPASO	12755	EL PASO LN	CAMINO LA VISTA	E END	E	8	AC	2	85	32	2,720	4/18/25	93	0	100	0	New Construction - Initial	3/1/11
ELRANC	12760	EL RANCHO VISTA	END	GILBERT ST	E	8	AC	2	920	32	29,440	4/22/25	19	66	31	3	New Construction - Initial	1/1/80
ELRANC	12770	EL RANCHO VISTA	VIA MIRADA	CANYON DR	E	8	AAC	2	1,310	32	41,920	4/21/25	92	0	73	27	Overlay - AC Structural	5/25/19
ELRANC	12780	EL RANCHO VISTA	CANYON DR	SUNSET LN	E	8	AAC	2	1,045	32	33,440	4/21/25	91	0	47	53	Overlay - AC Structural	5/25/19
ELINOR	12790	ELINOR WAY	ROSARITA DR	MADONNA DR	E	6	AC	2	1,360	32	43,520	11/25/20	98	0	36	64	Complete Reconstruction - AC	8/1/17
ELIZAB	12800	ELIZABETH WAY	JACARANDA PL	CHAPMAN AVE	E	7	AC	2	505	26	13,130	4/1/25	93	0	93	7	New Construction - Initial	7/1/13
ELIZAB	12805	ELIZABETH WAY	CHAPMAN AVE	END	E	7	AC	2	500	26	13,000	4/1/25	94	0	80	20	Reconstruct Surface (AC)	7/1/11
ELLISL	12810	ELLIS LN	POMONA AVE	ELLIS PL	E	3	AC	2	481	16	7,696	2/17/22	83	0	73	27	New Construction - Initial	1/1/80
ELLISP	12820	ELLIS PL	HARBOR BLVD	POMONA AVE	E	3	AC	2	600	28	16,800	2/17/22	46	18	48	34	New Construction - Initial	1/1/80
ELMAVE	12830	ELM AVE	LOCUST AVE	PACIFIC DR	E	1	AC	2	820	32	26,240	3/25/25	20	70	22	8	Surface Treatment - Slurry Seal	7/1/12
ELMAVE	12840	ELM AVE	EADINGTON AVE	END	E	1	AC	2	720	32	23,040	3/19/25	14	80	20	0	Surface Treatment - Slurry Seal	7/1/12
ELMAVE	12850	ELM AVE	BASQUE AVE	LEE AVE	E	1	AC	2	700	32	22,400	3/19/25	10	88	0	12	Surface Treatment - Slurry Seal	7/1/12
ELMAVE	12860	ELM AVE	ORCHARD AVE	CITRUS AVE	E	1	AC	2	870	32	27,840	3/19/25	29	66	33	1	Surface Treatment - Slurry Seal	7/1/12
ELMAVE	12870	ELM AVE	ADAMS AVE	WASHINGTON AVE	E	2	AC	2	393	32	12,576	2/17/22	55	79	21	0	MILL and OVERLAY	7/1/13
ELMAVE	12871	ELM AVE	WASHINGTON AVE	WOODS AVE	E	2	AC	2	261	32	8,352	2/17/22	87	0	100	0	New Construction - Initial	1/1/80
ELMAVE	12872	ELM AVE	WOODS AVE	RICHMAN AVE	E	2	AC	2	1,122	32	35,904	11/29/21	26	92	6	2	New Construction - Initial	1/1/80
ELMAVE	12880	ELM AVE	FORD AVE	HIGHLAND AVE	E	2	AC	2	340	32	10,880	2/17/22	92	0	97	3	New Construction - Initial	1/1/80
ELMAVE	12885	ELM AVE	HIGHLAND AVE	TAMARACK DR	E	2	AC	2	360	32	11,520	11/22/21	94	0	86	14	New Construction - Initial	1/1/80
ELMAVE	12890	ELM AVE	MALDEN AVE	HARBOR BLVD	E	2	AC	2	600	32	19,200	11/22/21	95	0	100	0	Cold Mill and Overlay	6/1/18
ELMAVE	12900	ELM AVE	END	POMONA AVE	E	3	AC	2	470	32	15,040	11/22/21	78	63	37	0	New Construction - Initial	1/1/80
ELMAVE	12910	ELM AVE	POMONA AVE	END	E	3	AC	2	310	32	9,920	11/22/21	92	0	100	0	New Construction - Initial	1/1/80
ELMAVE	12920	ELM AVE	END	LAWRENCE AVE	E	3	AC	2	600	32	19,200	11/22/21	88	0	100	0	New Construction - Initial	1/1/80
ELMAVE	12930	ELM AVE	LAWRENCE AVE	BALCOM AVE	E	3	AC	2	805	32	25,760	11/22/21	95	0	100	0	New Construction - Initial	1/1/80
ELMAVE	12940	ELM AVE	END	RAYMOND AVE	E	3	AC	2	1,180	32	37,760	2/17/22	60	0	100	0	New Construction - Initial	1/1/80
ELSAAV	12950	ELSA AVE	AVALON DR	HELEN DR	E	5	AAC	2	710	32	22,720	10/29/24	100	0	0	0	Overlay - AC Structural	10/29/24
ELTHAM	12960	ELTHAM PL	END	TARRYTOWN DR	E	8	AC	2	570	32	18,240	4/17/25	19	68	24	8	New Construction - Initial	1/1/80
EMYRAN	12970	EMERY RANCH RD	WISTERIA LN	ROSECRANS AVE	E	8	AAC	2	440	36	15,840	5/5/25	100	0	0	0	Overlay - AC Structural	5/5/25
ENTPRS	12980	ENTERPRISE WAY	KIMBERLY AVE	END	E	3	AC	2	400	38	15,200	12/23/21	97	0	64	36	New Construction - Initial	1/1/80
ESTRAL	12990	ESTRALITA PL	END	SUNNY WOOD DR	E	6	AC	2	220	32	7,040	5/9/25	82	65	28	7	Surface Treatment - Slurry Seal	6/1/24
EUCALY	13000	EUCALYPTUS PL	DEERPARK DR	END	E	4	AC	2	680	24	16,320	2/27/25	80	28	43	29	Surface Treatment - Slurry Seal	5/25/20
EVRGRN	13010	EVERGREEN AVE	BREA BLVD	SEQUOIA AVE	E	5	AC	2	1,560	32	49,920	12/4/20	99	0	100	0	Cold Mill and Overlay	8/1/18
EVRGRN	13020	EVERGREEN AVE	SEQUOIA AVE	LAUREL AVE	E	5	AC	2	1,300	32	41,600	4/22/25	82	0	100	0	Cold Mill and Overlay	8/1/18
EVRGRN	13030	EVERGREEN AVE	LAUREL AVE	LARK ELLEN DR	E	5	AC	2	1,110	32	35,520	12/4/20	73	42	43	15	New Construction - Initial	1/1/80
EVRGRN	13040	EVERGREEN AVE	MAPLE AVE	LIVE OAK AVE	E	5	AC	2	930	32	29,760	12/4/20	42	68	10	22	New Construction - Initial	1/1/80
FAIRFD	13050	FAIRFORD DR	TIFFANY PL	FAIRGREEN DR	E	8	AC	2	1,590	32	50,880	4/23/25	33	53	41	6	New Construction - Initial	1/1/80
FAIRGN	13060	FAIRGREEN DR	TIFFANY PL	END	E	8	AC	2	1,920	32	63,440	4/23/25	17	60	34	6	New Construction - Initial	1/1/80
FARVIW	13070	FARVIEW RD	FAIRGREEN DR	SUNNY RIDGE DR	E	8	AC	2	175	32	5,600	4/23/25	42	37	54	9	New Construction - Initial	1/1/80
FARVIW	13080	FARVIEW RD	SUNNY RIDGE DR	KINGHAM WAY	E	8	AC	2	555	32	17,760	4/22/25	17	63	31	6	New Construction - Initial	1/1/80
FENDAV	13085	FENDER AVE	ST COLLEGE BL	PLACENTIA AVE	E	4	AC	2	2,600	38	98,800	3/18/25	69	47	39	14	Complete Reconstruction - AC	6/1/18

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
FERNDR	13090	FERN DR	ADELENA DR	BROOKDALE PL	E	7	AC	2	515	32	16,480	4/25/23	25	74	11	15	New Construction - Initial	1/1/80
FERNDR	13100	FERN DR	BROOKDALE PL	CARHART AVE	E	7	AC	2	1,973	32	63,136	4/25/23	88	0	100	0	New Construction - Initial	1/1/80
FERNDR	13110	FERN DR	CARHART AVE	VALLEY VIEW DR	E	7	AC	2	1,726	32	55,232	4/25/23	87	0	62	38	New Construction - Initial	1/1/80
FERNDR	13120	FERN DR	EUCLID ST	WOODS AVE	E	2	AC	2	1,470	32	47,040	5/8/25	79	83	17	0	Surface Treatment - Slurry Seal	6/1/24
FERNDR	13130	FERN DR	WOODS AVE	RICHMAN AVE	E	2	AC	2	1,310	32	41,920	12/2/21	33	70	26	4	New Construction - Initial	1/1/80
FERNDR	13140	FERN DR	FORD AVE	END	E	2	AAC	2	710	32	22,720	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
FERNDR	13150	FERN DR	HORNET WAY	PRINCETON AVE	E	3	AC	2	670	32	21,440	11/17/21	46	55	40	5	New Construction - Initial	1/1/80
FERNDR	13160	FERN DR	RAYMOND AVE	NORMAN PL	E	3	AC	2	470	32	15,040	11/17/21	13	64	29	7	New Construction - Initial	1/1/80
FERNDR	13170	FERN DR	VICTORIA DR	HALE AVE	E	4	AC	2	250	32	8,000	4/15/25	74	53	47	0	Surface Treatment - Slurry Seal	5/25/20
FRNDLE	13180	FERNDALE AVE	DOROTHY LN	RIVERSIDE DR	E	3	AC	2	900	32	28,800	11/17/21	95	0	100	0	New Construction - Initial	1/1/80
FIESTA	13190	FIESTA PL	END	MORELIA AVE	E	6	AAC	2	190	32	6,080	8/3/23	100	0	0	0	Overlay - AC Structural	8/3/23
FIRETHN	13210	FIRETHORNE AVE	BERNARD DR	ARROUES DR	E	6	AC	2	900	32	28,800	4/22/25	87	34	66	0	Surface Treatment - Slurry Seal	5/25/20
FIRETHN	13220	FIRETHORNE AVE	BOXWOOD AVE	OAKWOOD AVE	E	6	AAC	2	900	32	28,800	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
FLTRDG	13230	FLINTRIDGE DR	LAS PALMAS DR	END	E	6	AC	2	590	28	16,520	1/7/21	18	78	12	10	New Construction - Initial	1/1/80
FLORNC	13240	FLORENCE PL	END	GREGORY AVE	E	7	AC	2	450	26	11,700	4/2/25	86	0	26	74	New Construction - Initial	1/1/80
FLOWER	13250	FLOWER AVE	DALE ST	MEADE AVE	E	1	AC	2	1,065	32	34,080	4/27/23	95	0	100	0	Surface Treatment - Slurry Seal	10/1/22
FLOWER	13260	FLOWER AVE	MAGNOLIA AVE	VINE AVE	E	1	AC	2	580	32	18,560	4/20/23	88	0	47	53	Cold Mill and Overlay	10/1/17
FLOWER	13265	FLOWER AVE	VINE AVE	LINDY PL	E	1	AC	2	980	32	31,360	4/20/23	89	0	79	21	Surface Treatment - Slurry Seal	7/1/12
FLOWER	13270	FLOWER AVE	LINDY PL	GILBERT ST	E	1	AC	2	895	32	28,640	4/20/23	46	74	22	4	Surface Treatment - Slurry Seal	7/1/12
FLOWER	13280	FLOWER AVE	PINE DR	COURTNEY AVE	E	1	AC	2	980	32	31,360	4/12/23	53	64	36	0	Surface Treatment - Slurry Seal	7/1/12
FLOWER	13290	FLOWER AVE	CEDAR AVE	HAWTHORNE AVE	E	1	AC	2	800	32	25,600	4/18/23	22	91	6	3	Surface Treatment - Slurry Seal	7/1/12
FLOWER	13300	FLOWER AVE	LOCUST AVE	LAMBERT AVE	E	1	AC	2	2,175	32	69,600	4/17/25	36	71	27	2	Surface Treatment - Slurry Seal	7/1/12
FORDAV	13310	FORD AVE	MALDEN AVE	GLENWOOD AVE	E	2	AAC	2	1,300	32	41,600	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
FORDAV	13320	FORD AVE	GLENWOOD AVE	DEL MONTE WEST	E	2	AC	2	260	32	8,320	12/17/21	27	56	44	0	New Construction - Initial	1/1/80
FORDAV	13330	FORD AVE	END	CHAPMAN AVE	E	2	AC	2	1,090	32	34,880	12/22/21	36	55	45	0	New Construction - Initial	1/1/80
FORDAV	13333	FORD AVE	CHAPMAN AVE	WILSHIRE AVE	E	2	AC	2	490	32	15,680	2/17/22	94	0	71	29	New Construction - Initial	3/5/11
FORDAV	13336	FORD AVE	WILSHIRE AVE	AMERIGE AVE	E	2	AC	2	350	32	11,200	12/22/21	30	54	36	10	New Construction - Initial	1/1/80
FORDAV	13340	FORD AVE	WEST AVE	ELM AVE	E	2	AC	2	390	32	12,480	2/17/22	90	0	40	60	New Construction - Initial	1/1/80
FOXDR	13350	FOX DR	END	VALENCIA MESA DR	E	7	AC	2	340	32	10,880	4/9/25	20	64	25	11	New Construction - Initial	1/1/80
FRANCS	13360	FRANCES AVE	SKYLINE DR	CANNON LN	E	5	AC	2	1,150	27	31,050	4/15/25	71	7	45	48	New Construction - Initial	1/1/80
FRANCS	50010	FRANCES AVE	SKYLINE DR	N END	E	5	AC	2	118	32	3,776	11/17/20	87	0	100	0	New Construction - AC	1/1/80
FRANKN	13370	FRANKLIN AVE	HASTINGS AVE	MEADE AVE	E	1	AAC	2	595	32	19,040	4/27/23	92	0	48	52	Overlay - AC Structural	4/16/22
FRANKN	13375	FRANKLIN AVE	MEADE AVE	END	E	1	AAC	2	400	32	12,800	4/27/23	95	0	100	0	Overlay - AC Structural	4/16/22
FRANKN	13380	FRANKLIN AVE	MAGNOLIA AVE	OLIN ST	E	1	AC	2	620	32	19,840	4/20/23	39	61	11	28	Surface Treatment - Slurry Seal	7/1/12
FRANKN	13385	FRANKLIN AVE	OLIN ST	WEST END	E	1	AC	2	605	32	19,360	4/20/23	38	75	9	16	Surface Treatment - Slurry Seal	7/1/12
FRANKH	13390	FRANKLIN HILLS DR	BURNING TREE RD	SUNNY RIDGE DR	E	8	AC	2	1,130	32	36,160	3/26/25	37	38	49	13	New Construction - Initial	1/1/80
FRIAR	13400	FRIAR PL	CORONADO DR	END	E	6	AC	2	225	32	7,200	12/4/20	22	83	16	1	New Construction - Initial	1/1/80
FULRNC	13410	FULLERTON CREEK DR	MELODY LN	MOUNTAIN VIEW PL	E	5	AC	2	700	32	22,400	12/22/20	36	65	35	0	New Construction - Initial	1/1/80
FULRNC	13420	FULLERTON CREEK DR	MOUNTAIN VIEW PL	SYCAMORE AVE	E	5	AC	2	1,650	32	52,800	12/22/20	23	88	12	0	New Construction - Initial	1/1/80
FULRNC	13430	FULLERTON CREEK DR	SYCAMORE AVE	YORBA LINDA BLVD	E	5	AC	2	850	32	27,200	12/22/20	20	72	28	0	New Construction - Initial	1/1/80
GAGEAV	13440	GAGE AVE	END	COURTNEY AVE	E	1	AC	2	400	32	12,800	4/12/23	28	75	20	5	Surface Treatment - Slurry Seal	7/1/12
GAGEAV	13450	GAGE AVE	PACIFIC DR	EADINGTON AVE	E	1	AC	2	1,080	32	34,560	4/17/23	89	42	55	3	Surface Treatment - Slurry Seal	7/1/12
GAGEAV	13455	GAGE AVE	EADINGTON AVE	BASQUE AVE	E	1	AC	2	970	32	31,040	4/17/23	21	90	3	7	Surface Treatment - Slurry Seal	7/1/12
GAGEAV	13460	GAGE AVE	BASQUE AVE	ORCHARD AVE	E	1	AC	2	920	32	29,440	4/17/23	90	0	95	5	Surface Treatment - Slurry Seal	7/1/12
GAGEAV	13470	GAGE AVE	JEFFERSON AVE	LOMBARD DR	E	2	AC	2	1,280	32	40,960	11/24/21	90	0	100	0	Surface Treatment - Slurry Seal	6/1/19
GAGEAV	13480	GAGE AVE	END	RICHMAN AVE	E	2	AC	2	300	26	7,800	11/24/21	93	0	100	0	New Construction - Initial	1/1/80
GAGEAV	50090	GAGE AVE	ORCHARD AVE	CITRUS AVE	E	1	AC	2	675	32	21,600	4/17/23	49	72	28	0	Surface Treatment - Slurry Seal	7/1/12
GALLIO	13490	GALLIO DR	CLEAR CREEK DR	ISLAND DR	E	8	AC	2	425	32	13,600	3/26/25	37	70	30	0	New Construction - Initial	1/1/80
GARNET	13500	GARNET LN	DEER PARK DR	PLACENTIA AVE	E	4	AC	2	1,110	37	41,070	2/27/25	79	23	65	12	Surface Treatment - Slurry Seal	5/25/20
GARNET	13510	GARNET LN	PLACENTIA AVE	SAPPHIRE RD	E	4	AC	2	1,290	37	47,730	12/3/20	62	0	91	9	New Construction - Initial	1/1/80
GENEVA	13520	GENEVA PL	POST RD	END	E	8	AC	2	360	32	11,520	4/17/25	23	64	23	13	New Construction - Initial	1/1/80
GILBES	13530	GILBERT ST	COMMONWEALTH AVE	VALENCIA DR	E	7	AAC	2	1,247	32	39,904	5/5/25	100	0	0	0	Overlay - AC Structural	5/5/25
GILBES	13540	GILBERT ST	VALENCIA DR	OLIVE AVE	E	1	AC	2	1,460	32	46,720	5/9/25	86	85	15	0	Surface Treatment - Slurry Seal	6/1/24
GILBES	13550	GILBERT ST	OLIVE AVE	ORANGETHORPE AVE	E	1	AC	2	1,100	32	35,200	5/9/25	91	0	100	0	Surface Treatment - Slurry Seal	6/8/24
GILBES	13560	GILBERT ST	ORANGETHORPE AVE	HOUSTON AVE	E	1	AC	2	1,779	32	56,928	4/12/23	65	52	12	36	New Construction - Initial	1/1/80
GLNVWD	13600	GLEN VIEW DR	N END	VALENCIA MESA DR	E	7	AC	2	320	32	10,240	5/8/25	91	0	100	0	Surface Treatment - REAS	8/16/24
GLNVWD	13605	GLEN VIEW DR	VALENCIA MESA DR	RODEO RD	E	7	AC	2	535	24	12,840	4/9/25	16	88	12	0	New Construction - Initial	3/1/11
GLNVWD	13610	GLEN VIEW DR	RODEO RD	S END	E	7	AC	2	1,020	28	28,560	4/9/25	25	56	10	34	New Construction - Initial	1/1/80
GLNHVN	13570	GLENHAVEN AVE	HIGHLAND AVE	VALLEY VIEW DR	E	7	AAC	2	1,605	32	51,360	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
GLNHVN	13580	GLENHAVEN AVE	VALLEY VIEW DR	S END	E	2	AC	2	625	32	20,000	12/20/21	70	67	19	14	New Construction - Initial	1/1/80
GLNHVN	13590	GLENHAVEN AVE	RICHMAN AVE	END	E	2	AC	2	690	32	22,080	12/20/21	89	0	65	35	New Construction - Initial	1/1/80
GLNWOD	13620	GLENWOOD AVE	FORD AVE	MALDEN AVE	E	2	AAC	2	1,345	32	43,040	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
GLNWOD	13630	GLENWOOD AVE	HARBOR BLVD	END	E	3	AC	2	510	32	16,320	5/8/25	86	0	21	79	Surface Treatment - Slurry Seal	6/1/24
GLNWOD	13640	GLENWOOD AVE	W END	PRINCETON AVE	E	3	AC	2	360	32	14,270	11/17/21	33	82	9	9	New Construction - Initial	1/1/80
GLNWOD	13650	GLENWOOD AVE	YALE AVE	RAYMOND AVE	E	3	AAC	2	1,500	32	48,000	8/1/22	100	0	0	0	Overlay - AC Structural	8/1/22
GLNWOD	13660	GLENWOOD AVE	RAYMOND AVE	RIEDEL AVE	E	3	AC	2	1,050	32	33,600	11/17/21	95	0	100	0	New Construction - Initial	1/1/80
GLNWOD	13665	GLENWOOD AVE	RIEDEL AVE	OAKDALE AVE	E	3	AC	2	260	32	8,320	11/17/21	8	97	3	0	New Construction - Initial	1/1/80
GLNWOD	13670	GLENWOOD AVE	MOUNTAIN VIEW PL	HALE AVE	E	4	AC	2	340	32	10,880	4/15/25	81	14	84	2	Surface Treatment - Slurry Seal	5/25/20
GOLDEN	13680	GOLDEN AVE	UNION AVE	MALVERN AVE	E	2	AC	2	860	32	27,520	12/20/21	100	0	0	0	Complete Reconstruction - AC	5/25/20
GRNDVW	13690	GRANDVIEW AVE	FERN DR	VALLEY VIEW DR	E	7	AC	2	345	32	11,040	4/8/25	34	62	38	0	New Construction - Initial	1/1/80
GRNDVW	13691	GRANDVIEW AVE	VALLEY VIEW DR	END	E	7	AC	2	1,165	32	38,780	4/23/25	14	69	22	9	New Construction - Initial	1/1/80
GRNDVW	13700	GRANDVIEW AVE	FERN DR	WOODS AVE	E	2	AC	2	1,420	32	45,440	12/20/21	96	96	4	0	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
GRNACD	13720	GREEN ACRE DR	W END	HIGHLAND AVE	E	7	AC	2	980	32	31,360	5/8/25	95	0	32	68	Surface Treatment - REAS	8/16/24
GRNACD	13730	GREEN ACRE DR	HIGHLAND AVE	E END	E	7	AC	2	693	32	22,176	5/8/25	96	0	100	0	Surface Treatment - Slurry Seal	8/16/24
GRNACR	13740	GREEN ACRE RD	GREEN ACRE DR	RICHMAN KNOLL	E	7	AC	2	420	32	13,440	5/8/25	96	0	100	0	Surface Treatment - REAS	8/9/24
GRNHLL	13750	GREENHILL DR	POST RD	END	E	8	AC	2	945	32	32,240	4/17/25	19	61	34	5	New Construction - Initial	1/1/80
GRNMDW	13760	GREENMEADOW DR	SUNNYHILLS RD	HERMOSA DR	E	6	AAC	2	1,340	32	42,880	4/18/25	90	14	35	51	Overlay - AC Structural	10/5/24
GRNVWP	13770	GREENVIEW PL	MEDFORD PL	END	E	4	AC	2	620	32	19,840	11/24/20	88	0	72	28	Surface Treatment - Slurry Seal	5/25/20
GREGRY	13780	GREGORY AVE	PRITCHARD AVE	END	E	7	AC	2	325	32	10,400	4/25/23	35	47	53	0	New Construction - Initial	1/1/80
GREGRY	13790	GREGORY AVE	CHAPMAN AVE	ADLENA DR	E	7	AC	2	1,540	32	49,280	4/2/25	21	73	14	13	New Construction - Initial	1/1/80
GREGRY	13800	GREGORY AVE	ADLENA DR	BASQUE AVE	E	7	AC	2	1,360	32	43,520	4/2/25	16	83	5	12	New Construction - Initial	1/1/80
GRSMPK	13810	GRISSOM PARK DR	PASEO GRANDE	MANZANITA DR	E	8	AC	2	1,981	32	69,120	4/22/25	27	48	40	12	New Construction - Initial	1/1/80
GROVE	13820	GROVE PL	RAYMOND AVE	HALL AVE	E	3	AC	2	630	32	20,160	12/6/21	95	0	100	0	New Construction - Initial	1/1/80
GROVE	13830	GROVE PL	HART PL	END	E	3	AC	2	225	32	7,200	12/6/21	73	36	64	0	New Construction - Initial	1/1/80
GROVE	13840	GROVE PL	HARRINGTON DR	MAERTIN LN	E	3	AC	2	1,060	32	33,920	12/6/21	25	92	8	0	New Construction - Initial	1/1/80
HALEAV	13850	HALE AVE	ALTO LN	END	E		AC	0	1,790	32	57,280	1/1/00	100	0	0	0	New Construction - Initial	1/1/00
HALEAV	13855	HALE AVE	PIONEER AVE	END	E		AC	0	180	32	5,760	1/1/00	100	0	0	0	New Construction - Initial	1/1/00
HALEAV	13860	HALE AVE	VICTORIA DR	END	E		AC	0	380	32	12,160	1/1/00	100	0	0	0	New Construction - Initial	1/1/00
HALEAV	13870	HALE AVE	FERN DR	GLENWOOD AVE	E		AC	0	520	32	16,640	1/1/00	100	0	0	0	New Construction - Initial	1/1/00
HALEAV	13880	HALE AVE	NUTWOOD AVE	CENTRAL AVE	E		AC	0	1,040	32	33,280	1/1/00	100	0	0	0	New Construction - Initial	1/1/00
HALEAV	13890	HALE AVE	WHITING AVE	WILSHIRE AVE	E		AC	0	325	32	10,400	5/14/25	88	0	100	0	Surface Treatment - Slurry Seal	6/1/24
HALEAV	13900	HALE AVE	WALNUT AVE	END	E		AC	0	250	40	10,000	1/1/00	100	0	0	0	New Construction - Initial	1/1/00
HALLAV	14000	HALL AVE	S END	ASH AVE	E	3	AC	2	180	32	5,760	2/17/22	46	91	9	0	New Construction - Initial	1/1/80
HALLAV	14005	HALL AVE	RIVERSIDE DR	S END	E	3	AC	2	420	32	13,440	12/6/21	94	0	100	0	New Construction - Initial	1/1/80
HALLAV	14010	HALL AVE	ASH AVE	N END	E	3	AC	2	178	26	4,628	2/17/22	87	0	100	0	New Construction - Initial	1/1/80
HAMELL	14020	HAMELL RD	END	HERMOSA DR	E	6	AC	2	320	25	8,000	5/8/25	96	0	0	100	Surface Treatment - Slurry Seal	6/1/24
HANSEN	14030	HANSEN AVE	END	WALLACE AVE	E	4	AC	2	1,005	32	32,160	12/10/20	54	72	28	0	Surface Treatment - Slurry Seal	5/25/20
HRMNYL	14040	HARMONY LN	END	LINCOLN AVE	E	5	AC	2	1,235	32	39,520	1/13/21	74	58	42	0	New Construction - Initial	1/1/80
HRMNYL	14050	HARMONY LN	LINCOLN AVE	STANFORD AVE	E	5	AC	2	830	32	26,560	4/16/25	69	36	63	1	New Construction - Initial	1/1/80
HRMNYL	14060	HARMONY LN	RIEDEL AVE	END	E	5	AC	2	1,130	32	36,160	4/16/25	40	58	33	9	New Construction - Initial	1/1/80
HRMNYP	14070	HARMONY PL	END	SHEPPARD DR	E	5	AC	2	225	32	7,200	1/6/21	38	71	29	0	New Construction - Initial	1/1/80
HARGTN	14080	HARRINGTON DR	VICTORIA DR	CENTRAL AVE	E	3	AC	2	810	32	25,920	12/6/21	14	89	11	0	New Construction - Initial	1/1/80
HARGTN	14090	HARRINGTON DR	CENTRAL AVE	CHAPMAN AVE	E	3	AC	2	275	32	8,800	5/8/25	81	0	0	100	Surface Treatment - REAS	11/1/24
HARGTN	14095	HARRINGTON DR	CHAPMAN AVE	S END	E	3	AC	2	960	32	30,720	12/6/21	94	0	100	0	New Construction - Initial	1/1/80
HARGTN	14100	HARRINGTON DR	COMMONWEALTH AVE	END	E	3	AC	2	615	32	19,680	5/14/25	93	0	100	0	New Construction - Initial	1/1/80
HARTPL	14105	HART PL	VICTORIA DR	CHAPMAN AVE	E	3	AC	2	734	32	23,488	12/6/21	95	0	100	0	New Construction - Initial	1/1/80
HARTPL	14110	HART PL	END	WILSHIRE AVE	E	3	AC	2	450	27	12,150	12/6/21	95	0	100	0	New Construction - Initial	1/1/80
HARTPL	14120	HART PL	REVERE AVE	END	E	3	AC	2	470	32	15,040	12/6/21	91	0	100	0	New Construction - Initial	1/1/80
HARTPL	14130	HART PL	SUDENE AVE	END	E	3	AC	2	350	27	9,450	5/14/25	85	21	79	0	New Construction - Initial	1/1/80
HARTFD	14140	HARTFORD AVE	ROLLING HILLS DR	TREEVIEW PL	E	4	AC	2	141	35	4,935	2/27/25	87	16	53	31	Surface Treatment - Slurry Seal	5/25/20
HARTFD	14145	HARTFORD AVE	TREEVIEW PL	END	E	4	AC	2	328	32	10,496	12/4/20	91	0	67	33	Surface Treatment - Slurry Seal	5/25/20
HARTFD	14150	HARTFORD AVE	END	BASTANCHURY RD	E	4	AC	2	1,635	32	52,320	4/22/25	28	69	31	0	New Construction - Initial	1/1/80
HARTFD	14160	HARTFORD AVE	BASTANCHURY RD	SHERWOOD AVE	E	4	AC	2	1,155	32	36,960	6/5/26	95	0	100	0	Surface Treatment - REAS	8/30/25
HASTNG	14170	HASTINGS AVE	WEST AVE	ASH AVE	E	1	AAC	2	530	32	16,960	4/27/23	95	0	100	0	Surface Reconstruction - AC	4/16/22
HASTNG	14180	HASTINGS AVE	OAK AVE	PORTER AVE	E	1	AC	2	1,100	32	35,200	4/27/23	94	0	91	9	Surface Treatment - Slurry Seal	10/1/22
HAWTHN	14190	HAWTHORNE AVE	FLOWER AVE	SOUTHGATE AVE	E	1	AC	2	765	32	24,480	4/18/23	38	69	31	0	Surface Treatment - Slurry Seal	7/1/12
HEATHE	14200	HEATHER DR	N END	LARK ELLEN DR	E	5	AC	2	215	32	8,880	6/5/26	56	96	4	0	Surface Treatment - REAS	8/28/25
HEATHE	14210	HEATHER DR	LARK ELLEN DR	END	E	5	AC	2	884	36	34,324	6/5/26	73	99	1	0	Surface Treatment - REAS	8/28/25
HELEND	14214	HELEN DR	PARK VIEW DR	S END	E	5	AAC	2	470	32	15,040	10/29/24	100	0	0	0	Overlay - AC Structural	10/29/24
HELEND	14218	HELEN DR	N END	MARION BL	E	5	AAC	2	680	32	21,760	10/29/24	100	0	0	0	Overlay - AC Structural	10/29/24
HEMLCK	14220	HEMLOCK PL	EL MIRADOR DR	ROLLING HILLS DR	E	5	AC	2	650	32	20,800	11/25/20	76	0	98	2	Cold Mill and Overlay	8/1/18
HEMLCK	14230	HEMLOCK PL	END	BEECHWOOD AVE	E	5	AC	2	380	32	12,160	11/25/20	88	0	100	0	New Construction - Initial	1/1/80
HERMSD	14235	HERMOSA DR	LAS PALMAS DR	LAKEVIEW DR	E	6	AC	2	1,110	24	26,640	12/3/20	76	29	65	6	New Construction - Initial	1/1/80
HERMSD	14240	HERMOSA DR	LAKEVIEW DR	HARBOR BL	E	6	AC	2	1,755	27	47,385	1/7/21	32	65	30	5	New Construction - Initial	1/1/80
HERMSD	14250	HERMOSA DR	HARBOR BL	HIDEAWAY LN	E	6	AAC	2	880	32	28,160	10/5/24	100	0	0	0	Overlay - AC Structural	10/5/24
HERMSD	14260	HERMOSA DR	HIDEAWAY LN	TWILIGHT DR	E	6	AAC	2	1,825	32	58,400	10/5/24	100	0	0	0	Overlay - AC Structural	10/5/24
HERMSD	14270	HERMOSA DR	TWILIGHT DR	MADONNA DR	E	6	AAC	2	990	32	31,680	10/5/24	100	0	0	0	Overlay - AC Structural	10/5/24
HERMSD	14280	HERMOSA DR	MADONNA DR	PUENTE ST/ BRIARWOOD DR	E	6	AAC	2	1,160	32	37,120	10/5/24	100	0	0	0	Overlay - AC Structural	10/5/24
HERMSP	14290	HERMOSA PL	END	LAS PALMAS DR	E	6	AC	2	1,210	32	38,720	5/8/25	91	27	68	5	Surface Treatment - Cape Seal	12/1/24
HETEBRINKS	22004	HETEBRINK ST	STARBUCKS ST	GOODWIN ST	E		AC	0	1,100	40	41,500	4/18/22	100	0	0	0	New Construction - Initial	4/18/22
HETEBRINKS	22005	HETEBRINK ST	GOODWIN ST	NICOLAS ST	E		AC	0	1,250	40	50,000	4/18/22	100	0	0	0	New Construction - Initial	4/18/22
HICKRY	14310	HICKORY PL	HEATHER DR	END	E	5	AC	2	160	32	5,120	6/5/26	56	97	3	0	Surface Treatment - REAS	8/28/25
HICKRY	14320	HICKORY PL	ROSALIA DR	END	E	5	AC	2	305	32	9,760	6/5/26	77	81	11	8	Surface Treatment - REAS	8/28/25
HIDEWY	14330	HIDEAWAY LN	END	HERMOSA DR	E	6	AC	2	320	27	8,640	5/8/25	85	32	41	27	Surface Treatment - Slurry Seal	6/1/24
HIGCRT	14340	HIGHCREST CT	MOUNTAIN RIDGE DR	END	E	4	AC	2	150	26	3,900	4/21/25	86	0	82	18	New Construction - Initial	1/1/80
HIGLND	14350	HIGHLAND AVE	BASTANCHURY RD	GREEN ACRE DR	E	7	AC	2	245	32	7,840	5/8/25	95	0	100	0	Surface Treatment - REAS	8/16/24
HIGLND	14360	HIGHLAND AVE	RICHMAN AVE	EL DORADO DR	E	7	AAC	2	735	32	23,520	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
HIGLND	14370	HIGHLAND AVE	EL DORADO DR	VALLEY VIEW DR	E	7	AAC	2	1,058	32	33,856	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
HIGLND	14375	HIGHLAND AVE	VALLEY VIEW DR	FORD AVE	E	7	AAC	2	441	32	14,112	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
HIGLND	14380	HIGHLAND AVE	GLENWOOD AVE	UNION AVE	E	2	AAC	2	425	32	13,600	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
HIGLND	14383	HIGHLAND AVE	UNION AVE	CHAPMAN AVE	E	2	AC	2	1,170	28	32,760	12/3/21	95	0	100	0	New Construction - Initial	1/1/80
HIGLND	14386	HIGHLAND AVE	CHAPMAN AVE	WILSHIRE AVE	E	2	AC	2	490	34	16,660	12/3/21	95	0	100	0	New Construction - Initial	1/1/80
HIGLND	14390	HIGHLAND AVE	WILSHIRE AVE	COMMONWEALTH AVE	E	2	AC	3	688	34	23,392	12/3/21	94	0	100	0	New Construction - Initial	1/1/80
HIGLND	14395	HIGHLAND AVE	COMMONWEALTH AVE	PCC 140' N/ WALNUT AVE	E	2	AC	2	535	40	20,190	12/3/21	88	0	90	10	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
HIGLND	14396	HIGHLAND AVE	PCC 140' N/ WALNUT AVE	WALNUT AVE	E	7	PCC	2	141	40	5,640	2/17/22	98	0	100	0	New Construction - Initial	1/1/80
HIGLND	14397	HIGHLAND AVE	WALNUT AVE	TRUSLOW AVE	E	7	AC	2	1,105	32	35,360	12/15/21	85	28	70	2	New Construction - Initial	1/1/80
HIGLND	14400	HIGHLAND AVE	TRUSLOW AVE	VALENCIA DR	E	2	AC	3	410	40	16,400	12/15/21	79	38	62	0	New Construction - Initial	1/1/80
HIGLND	14410	HIGHLAND AVE	HILL AVE	ORANGETHORPE AVE	E	2	AC	3	495	60	29,700	12/15/21	99	0	100	0	New Construction - Initial	1/1/80
HIGLND	14413	HIGHLAND AVE	ORANGETHORPE AVE	BAKER AVE	E	2	AC	4	900	60	54,000	12/15/21	95	0	84	16	Surface Treatment - Slurry Seal	3/1/23
HIGLND	14416	HIGHLAND AVE	BAKER AVE	END	E	2	AAC	3	600	60	36,000	3/1/23	100	0	0	0	Overlay - AC Structural	3/1/23
HIGLND	50070	HIGHLAND AVE	VALENCIA DR	ROSSLYNN AVE	E	7	AC	3	855	36	38,650	12/15/21	98	0	59	41	New Construction - Initial	1/1/80
HIGLND	50080	HIGHLAND AVE	ROSSLYNN AVE	HILL AVE	E	7	AC	3	995	45	44,775	12/15/21	97	0	43	57	New Construction - Initial	1/1/80
HIGLND	50140	HIGHLAND AVE	RICHMAN AVE	END	E	7	AC	2	720	32	25,290	4/9/25	88	0	100	0	New Construction - Initial	1/1/80
HILLAV	14420	HILL AVE	HASTINGS AVE	MEADE AVE	E	1	AC	2	950	32	30,400	4/27/23	93	0	100	0	Surface Treatment - Slurry Seal	10/17/22
HILLAV	14430	HILL AVE	VINE AVE	CHERRY AVE	E	1	AC	2	900	32	28,800	4/18/23	93	0	58	42	Surface Treatment - Slurry Seal	7/1/12
HILLAV	14440	HILL AVE	PINE DR	COURTNEY AVE	E	1	AC	2	990	32	31,680	4/12/23	19	88	12	0	Surface Treatment - Slurry Seal	7/1/12
HILLAV	14450	HILL AVE	END	PACIFIC	E	1	AC	2	570	32	18,240	3/25/25	26	57	29	14	Surface Treatment - Slurry Seal	7/1/12
HILLAV	14460	HILL AVE	PACIFIC DR	END	E	1	AC	2	433	32	15,856	3/25/25	46	37	43	20	Surface Treatment - Slurry Seal	7/1/12
HILLAV	14470	HILL AVE	BASQUE AVE	CITRUS AVE	E	1	AC	2	1,605	32	51,360	4/21/25	37	58	42	0	Surface Treatment - Slurry Seal	7/1/12
HILLAV	14474	HILL AVE	CITRUS AVE	EUCLID ST	E		AAC	0	1,050	32	36,200	8/29/23	69	50	50	0	New Construction - Initial	1/1/10
HILLAV	14475	HILL AVE	END	JEFFERSON AVE	E	2	AC	2	125	32	4,000	12/1/21	23	81	0	19	Surface Treatment - Slurry Seal	7/1/12
HILLAV	14480	HILL AVE	ADAMS AVE	END	E	2	AC	2	130	32	4,160	12/1/21	26	75	0	25	Surface Treatment - Slurry Seal	7/1/12
HILLAV	14490	HILL AVE	WOODS AVE	RICHMAN AVE	E	2	AC	2	1,160	32	37,120	11/29/21	28	87	11	2	New Construction - Initial	1/1/80
HILLAV	14500	HILL AVE	RICHMAN AVE	HIGHLAND AVE	E	2	AC	2	1,280	32	40,960	11/29/21	71	79	21	0	New Construction - Initial	1/1/80
HILLAV	14510	HILL AVE	HIGHLAND AVE	HARBOR BLVD	E	2	AC	2	1,280	32	40,960	11/24/21	44	84	16	0	New Construction - Initial	1/1/80
HLCRTD	14520	HILLCREST DR	LEMON ST	END	E	3	AC	2	1,075	32	34,400	4/8/24	90	0	100	0	Surface Treatment - Cape Seal	7/1/23
HLCRTL	14530	HILLCREST LN	END	HILLCREST DR	E	3	AC	2	310	20	6,200	2/17/22	73	0	24	76	Surface Treatment - REAS	7/1/23
HLLBOR	14540	HILLSBORO PL	BASTANCHURY RD	END	E	7	AAC	2	610	32	19,520	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
HLLTOP	14550	HILLTOP CT	S END	MOUNTAIN RIDGE DR	E	4	AC	2	540	26	14,040	4/21/25	81	0	41	59	New Construction - Initial	1/1/80
HLLTOP	14555	HILLTOP CT	BASTANCHURY RD	END	E	5	AC	2	120	26	3,120	4/22/25	88	0	48	52	New Construction - Initial	1/1/80
HLLTOP	14560	HILLTOP CT	MOUNTAIN RIDGE DR	N END	E	4	AC	2	275	26	7,150	4/21/25	87	0	100	0	New Construction - Initial	1/1/80
HILLVW	14570	HILLVIEW CIR	END	MOUNTAIN RIDGE DR	E	4	AC	2	435	26	11,310	4/21/25	82	0	47	53	New Construction - Initial	1/1/80
HOLYDL	14580	HOLLYDALE DR	END	MIRARMAR DR	E	5	AC	2	1,020	32	32,640	4/16/25	72	8	33	59	New Construction - Initial	1/1/80
HOLYDL	14590	HOLLYDALE DR	MIRARMAR DR	MELODY LN	E	5	AAC	2	1,090	32	34,880	5/5/25	100	0	0	0	Overlay - AC Structural	5/5/25
HOLYDL	14600	HOLLYDALE DR	MELODY LN	DOROTHY LN	E	5	AAC	2	560	32	17,920	5/5/25	100	0	0	0	Overlay - AC Structural	5/5/25
HOLYDL	14605	HOLLYDALE DR	DOROTHY LN	GLENWOOD AVE	E	3	AC	2	700	32	22,400	11/17/21	11	91	5	4	New Construction - Initial	1/1/80
HOLYOK	14610	HOLLYOAK DR	BASTANCHURY RD	END	E	5	AC	2	1,105	32	35,360	4/22/25	79	35	46	19	New Construction - Initial	1/1/80
HOLYOK	14620	HOLLYOAK DR	END	BASTANCHURY RD	E	5	AC	2	70	32	2,240	4/22/25	93	0	100	0	New Construction - Initial	1/1/80
HORNET	14630	HORNET WAY	DOROTHY LN	BERKELEY AVE	E	3	AC	2	520	32	16,640	11/15/21	72	0	100	0	New Construction - Initial	1/1/80
HORTON	14640	HORTON AVE	END	AMERIGE AVE	E	7	AC	2	225	32	7,200	4/1/25	49	88	12	0	New Construction - Initial	1/1/80
HOUSTN	14650	HOUSTON AVE	PINE DR	KNUCKLE (100' E/ COURTNEY AVE)	E	1	AC	2	1,023	32	34,140	4/12/23	43	81	17	2	Surface Treatment - Slurry Seal	7/1/12
HOUSTN	14660	HOUSTON AVE	ROBERTA AVE	PACIFIC DR	E	1	AC	2	975	32	31,200	4/11/23	87	45	46	9	Surface Treatment - Slurry Seal	7/1/12
HOUSTN	14670	HOUSTON AVE	PACIFIC DR	EADINGTON AVE	E	1	AC	2	1,140	32	36,480	4/11/23	92	0	100	0	Surface Treatment - Slurry Seal	7/1/12
HOUSTN	14680	HOUSTON AVE	EADINGTON AVE	BASQUE AVE	E	1	AC	2	1,010	32	32,320	4/11/23	92	0	75	25	Surface Treatment - Slurry Seal	7/1/12
HOUSTN	14690	HOUSTON AVE	BASQUE AVE	ORCHARD AVE	E	1	AC	2	950	32	30,400	4/11/23	91	0	100	0	New Construction - Initial	1/1/80
HOUSTN	14700	HOUSTON AVE	ORCHARD AVE	BAKER AVE	E	1	AC	2	1,801	32	57,632	4/11/23	93	0	85	15	Surface Treatment - Slurry Seal	7/1/12
HOUSTN	14710	HOUSTON AVE	ROOSEVELT AVE	LOMBARD DR	E	2	AC	2	1,800	32	57,600	11/24/21	92	0	100	0	Surface Treatment - Slurry Seal	6/1/19
HOUSTN	14720	HOUSTON AVE	LOMBARD DR	E END	E	2	AC	2	1,265	32	40,480	11/24/21	82	36	64	0	New Construction - Initial	1/1/80
HOUSTN	14725	HOUSTON AVE	W END	HARBOR BL	E	2	AC	2	515	32	16,480	12/16/21	77	29	64	7	New Construction - Initial	1/1/80
HOUSTN	50030	HOUSTON AVE	KNUCKLE (100' E/ COURTNEY AVE)	END	E	1	AC	2	1,268	30	36,985	4/12/23	73	37	49	14	Surface Treatment - Slurry Seal	7/1/12
HUGHESDR	22000	HUGHES DR	GILBERT ST	STARBUCKS ST	E		AC	0	710	40	28,400	4/18/22	100	0	0	0	New Construction - Initial	4/18/22
HUGHESDR	22001	HUGHES DR	STARBUCKS ST	NICHLAS ST	E		AC	0	2,250	40	88,750	4/18/22	100	0	0	0	New Construction - Initial	4/18/22
HUGHESDR	22002	HUGHES DR	NICHLAS ST	SPENCER LN	E		AC	0	1,010	40	40,400	4/18/22	100	0	0	0	New Construction - Initial	4/18/22
HUGHESDR	22003	HUGHES DR	SPENCER LN	BASTANCHURY RD	E		AC	0	1,650	40	66,000	4/18/22	100	0	0	0	New Construction - Initial	4/18/22
IRISCT	14730	IRIS CT	END	GILBERT ST	E	1	AAC	2	720	32	23,040	4/17/23	87	0	100	0	Overlay - AC Structural	4/16/22
ISLAND	14740	ISLAND DR	N END	BURNING TREE RD	E	8	AC	2	1,440	32	46,080	3/26/25	27	47	46	7	New Construction - Initial	1/1/80
ISLAND	14750	ISLAND DR	BURNING TREE RD	S END	E	8	AC	2	655	32	20,960	3/26/25	39	38	62	0	New Construction - Initial	1/1/80
IVYPL	14760	IVY PL	WINCHESTER ST	MYSTIC AVE	E	4	AC	2	270	32	8,640	12/4/20	13	62	12	26	New Construction - Initial	1/1/80
IVYPL	14770	IVY PL	END	DEVONHIRE AVE	E	4	AC	2	180	32	5,760	12/4/20	33	52	43	5	New Construction - Initial	1/1/80
JACARA	14780	JACARANDA PL	WANDA DR	CHAPMAN AVE	E	7	AC	2	1,345	26	34,970	4/2/25	26	89	5	6	New Construction - Initial	1/1/80
JACARA	14785	JACARANDA PL	ALLEY W/DIANA PL	WANDA DR	E	7	AC	2	721	26	18,746	4/1/25	48	78	22	0	New Construction - Initial	7/1/11
JACARA	14790	JACARANDA PL	ELIZABETH WAY	ALLEY W/DIANA PL	E	7	AC	2	436	26	11,336	4/1/25	93	0	85	15	Reconstruct Surface (AC)	7/1/11
JACARA	14800	JACARANDA PL	ORCHARD AVE	MARIE AVE	E	7	AC	2	850	32	27,200	12/23/21	96	0	0	100	New Construction - Initial	1/1/80
JACARA	14810	JACARANDA PL	END	MALDEN AVE	E	2	AAC	2	3,038	32	97,216	3/1/22	100	0	0	0	Overlay - AC Structural	3/1/22
JANET	14820	JANET PL	REVERE AVE	END	E	3	AC	2	450	27	12,150	12/6/21	94	0	100	0	New Construction - Initial	1/1/80
JANET	14830	JANET PL	SUDENE AVE	END	E	3	AC	2	340	27	9,180	5/14/25	86	17	83	0	Surface Treatment - Slurry Seal	6/1/24
JASMIN	14840	JASMINE AVE	END	FLOWER AVE	E	1	AC	2	230	26	5,980	4/12/23	28	95	5	0	Surface Treatment - Slurry Seal	7/1/12
JEFRSN	14845	JEFFERSON AVE	N END	CHAPMAN AVE	E	2	AC	2	150	26	3,900	12/20/21	8	100	0	0	New Construction - Initial	1/1/80
JEFRSN	14850	JEFFERSON AVE	CHAPMAN AVE	WILSHIRE AVE	E	2	AC	2	540	32	17,280	12/20/21	32	69	27	4	New Construction - Initial	1/1/80
JEFRSN	14860	JEFFERSON AVE	END	COMMONWEALTH AVE	E	2	AC	2	170	32	5,440	12/22/21	76	38	62	0	New Construction - Initial	1/1/80
JEFRSN	14870	JEFFERSON AVE	MAPLEWOOD AVE	ROSSLYNN AVE	E	2	AC	2	470	32	15,040	12/1/21	47	69	16	15	Surface Treatment - Slurry Seal	7/1/12
JEFRSN	14880	JEFFERSON AVE	SOUTHGATE AVE	END	E	2	AC	2	370	32	11,840	12/1/21	18	76	4	20	Surface Treatment - Slurry Seal	7/1/12
JEFRSN	14890	JEFFERSON AVE	ORANGETHORPE AVE	BAKER AVE	E	2	AC	2	850	32	27,200	11/24/21	90	0	100	0	Surface Treatment - Slurry Seal	6/1/19
JENSEN	14900	JENSEN WAY	COMMONWEALTH AVE	CAROL DR	E	7	AC	2	430	32	13,760	4/27/23	92	0	93	7	New Construction - Initial	1/1/80
JENSEN	14910	JENSEN WAY	END	VALENCIA DR	E	7	AC	2	510	32	16,320	5/9/25	100	0	100	0	Surface Treatment - Slurry Seal	6/1/24
JENSEN	14915	JENSEN WAY	VALENCIA DR	OAK AVE	E	1	AC	2	860	32	27,520	4/20/23	43	87	9	4	Surface Treatment - Slurry Seal	7/1/12

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
JHNSON	14920	JOHNSON PL	CARHART AVE	STEPHENS AVE	E	7	AC	2	410	28	11,480	12/23/21	86	0	100	0	New Construction - Initial	1/1/80
JHNSTN	14930	JOHNSTON KNOLL	SUNNYCREST DR	END	E	7	AC	2	340	28	9,520	4/8/25	83	0	100	0	New Construction - Initial	1/1/80
JOSEWY	14940	JOSE WAY	END	DOMINGO RD	E	6	AC	2	1,390	32	44,480	12/30/20	60	75	22	3	Surface Treatment - Slurry Seal	5/25/20
JUANIT	14950	JUANITA PL	CLARION DR	END	E	6	AC	2	710	32	22,720	1/6/21	13	71	5	24	New Construction - Initial	1/1/80
JULIE	14960	JULIE AVE	GREGORY AVE	END	E	7	AC	2	460	26	11,960	4/2/25	22	77	5	18	New Construction - Initial	1/1/80
JUNIPR	14970	JUNIPER AVE	END	FLOWER AVE	E	1	AC	2	230	26	5,980	4/12/23	83	26	53	21	Surface Treatment - Slurry Seal	7/1/12
KELLOG	14980	KELLOG AVE	COMMONWEALTH AVE	CAROL DR	E	7	AC	2	510	26	13,260	4/20/23	93	0	88	12	New Construction - Initial	1/1/80
KELLOG	14982	KELLOG AVE	CAROL DR	SOUTH END	E	7	AC	2	320	26	8,320	4/20/23	94	0	100	0	New Construction - Initial	1/1/80
KELLOG	14985	KELLOG AVE	NORTH END	VALENCIA DR	E	7	AC	2	330	32	10,560	4/27/23	22	88	4	8	New Construction - Initial	1/1/80
KNSGTN	14990	KENSINGTON DR	HOLLYDALE DR	MELODY LN	E	5	AC	2	720	32	23,040	12/15/20	42	57	13	30	New Construction - Initial	1/1/80
KNSGTN	14995	KENSINGTON DR	MELODY LN	END	E	5	AC	2	670	32	21,440	4/23/25	83	0	83	17	New Construction - Initial	1/1/80
KNWOOD	15000	KENWOOD PL	END	RAYMOND AVE	E	5	AC	2	260	32	8,320	4/16/25	48	43	56	1	New Construction - Initial	1/1/80
KMBRLY	15020	KIMBERLY AVE	RAYMOND AVE	ACACIA AVE	E	3	AC	3	2,570	38	97,660	12/23/21	67	21	69	10	New Construction - Initial	1/1/80
KMBRLY	15030	KIMBERLY AVE	ACACIA AVE	STATE COLLEGE BLVD	E	4	PCC	2	2,560	32	81,920	10/1/22	100	0	0	0	Complete Reconstruction - PCC	10/1/22
KMBRLY	15040	KIMBERLY AVE	STATE COLLEGE BLVD	PLACENTIA AVE	E	4	AC	2	2,150	32	68,800	12/23/21	79	0	95	5	New Construction - Initial	1/1/80
KINGPL	15050	KING PL	END	CHAPMAN AVE	E	7	AC	2	530	26	13,780	4/1/25	89	0	75	25	Reconstruct Surface (AC)	7/1/11
KINGPL	15060	KING PL	CHAPMAN AVE	END	E	7	AC	2	560	26	14,560	4/1/25	93	0	86	14	Reconstruct Surface (AC)	7/1/11
KNGHM	15070	KINGHAM WAY	BARONET PL	END	E	8	AC	2	1,676	32	53,632	4/22/25	19	66	34	0	New Construction - Initial	1/1/80
KNEPP	15080	KNEPP AVE	ROOSEVELT AVE	WOODS AVE	E	2	AC	2	1,175	32	37,600	12/1/21	46	64	34	2	Surface Treatment - Slurry Seal	7/1/12
KNEPP	15090	KNEPP AVE	WOODS AVE	RICHMAN AVE	E	2	AC	2	1,170	32	37,440	11/29/21	47	72	25	3	New Construction - Initial	1/1/80
KNEPP	15100	KNEPP AVE	RICHMAN AVE	HIGHLAND AVE	E	2	AC	2	1,280	32	40,960	11/29/21	73	69	31	0	New Construction - Initial	1/1/80
KNEPP	15110	KNEPP AVE	HIGHLAND AVE	MALDEN AVE	E	2	AAC	2	630	32	20,160	3/1/23	100	0	0	0	Overlay - AC Structural	3/1/23
KNEPP	15115	KNEPP AVE	MALDEN AVE	HARBOR BL	E	2	PCC	2	620	33	20,460	11/29/21	100	0	0	0	New Construction - Initial	1/1/80
KROEGR	15120	KROEGER AVE	EDGECLIFF DR	MIRAMAR PL	E	5	AC	2	850	32	27,200	4/16/25	9	69	27	4	New Construction - Initial	1/1/80
KROEGR	15125	KROEGER AVE	MIRAMAR PL	MELODY LN	E	5	AC	2	892	32	28,544	4/16/25	40	50	50	0	New Construction - Initial	1/1/80
KROEGR	15130	KROEGER AVE	DOROTHY LN	GLENWOOD AVE	E	3	AC	2	700	32	22,400	11/17/21	93	0	58	42	New Construction - Initial	1/1/80
LACRST	15140	LA CRESTA PL	RODEO RD	PINE RIDGE KNOLL	E	7	AC	2	590	28	16,520	4/9/25	16	81	10	9	New Construction - Initial	1/1/80
LAENTD	15150	LA ENTRADA PL	CORONADO DR	HARBOR BL	E	6	AC	2	495	48	23,760	4/18/25	79	26	74	0	Surface Treatment - Slurry Seal	5/25/20
LAENTD	15155	LA ENTRADA PL	HARBOR BL	SAN JUAN DR	E	6	AC	2	185	25	5,175	12/23/20	100	0	0	0	New Construction - Initial	1/1/80
LAENTD	15156	LA ENTRADA PL	SAN JUAN DR	HARBOR BL	E	6	AAC	2	185	25	5,150	4/16/22	100	0	0	0	Overlay - AC Structural	4/16/22
LALOMA	15160	LA LOMA PL	END	ARBOL DR	E	6	AAC	2	235	32	7,520	4/16/22	100	0	0	0	Overlay - AC Structural	4/16/22
LAMESD	15170	LA MESA DR	VALENCIA MESA DR	LA MESA PL	E	7	AC	2	1,070	22	23,540	12/22/21	72	25	74	1	New Construction - Initial	1/1/80
LAMESD	15180	LA MESA DR	LA MESA PL	VALLEY VIEW DR	E	7	AC	2	742	22	16,324	12/22/21	83	0	100	0	New Construction - Initial	1/1/80
LAMESP	15190	LA MESA PL	END	LA MESA DR	E	7	AC	2	200	16	3,200	4/2/25	12	34	37	29	New Construction - Initial	1/1/80
LASNDA	15200	LA SENDA DR	LA TRAVESIA DR	EUCLID ST	E	6	AC	2	1,140	32	36,480	12/11/20	13	76	16	8	New Construction - Initial	1/1/80
LASMBR	15210	LA SOMBRA WAY	LAS PALMAS DR	END	E	6	AC	2	320	32	10,240	1/7/21	26	82	18	0	New Construction - Initial	1/1/80
LATRVA	15220	LA TRAVESIA DR	COUNTRY HILLS DR	LA SENDA DR	E	6	AC	2	880	32	28,160	12/11/20	31	70	21	9	New Construction - Initial	1/1/80
LATRVA	15230	LA TRAVESIA DR	END	LAKEVIEW WAY	E	6	AC	2	1,025	32	32,800	12/11/20	16	64	31	5	New Construction - Initial	1/1/80
LADRVS	15240	LADERA VISTA DR	ACACIA AVE	LADERA VISTA PL	E	5	AC	2	2,640	32	84,480	1/13/21	74	74	25	1	New Construction - Initial	1/1/80
LADRVS	15250	LADERA VISTA DR	LADERA VISTA PL	PIONEER AVE	E	5	AC	2	800	26	20,800	4/16/25	41	50	46	4	New Construction - Initial	1/1/80
LADRVS	15260	LADERA VISTA DR	MELODY LN	END	E	5	AC	2	325	32	10,400	4/21/25	39	61	39	0	New Construction - Initial	1/1/80
LADRVS	15270	LADERA VISTA DR	END	CHAPMAN AVE	E	4	AC	2	1,440	32	46,080	11/24/20	26	77	23	0	New Construction - Initial	1/1/80
LADRVS	15280	LADERA VISTA DR	WILSHIRE AVE	COMMONWEALTH AVE	E	4	AC	2	620	32	19,840	5/14/25	75	85	15	0	Surface Treatment - Slurry Seal	6/1/24
LAGUNA	15290	LAGUNA RD	EUCLID ST	TERRAZA PL	E	6	AC	2	1,415	32	45,280	12/23/20	40	64	29	7	New Construction - Initial	1/1/80
LAGUNA	15300	LAGUNA RD	TERRAZA PL	MORELIA PL	E	6	AC	2	1,932	36	69,552	12/3/20	25	74	21	5	New Construction - Initial	1/1/80
LAGUNA	15310	LAGUNA RD	MORELIA PL	BASTANCHURY RD	E	6	AC	3	1,515	36	54,540	12/30/20	54	87	11	2	New Construction - Initial	1/1/80
LAGUNA	15315	LAGUNA RD	BASTANCHURY RD	VALENCIA MESA DR	E	7	AC	2	825	36	29,700	4/18/25	85	0	40	60	New Construction - Initial	1/1/80
LAKESD	15320	LAKESIDE DR	END	HERMOSA DR	E	6	AC	2	1,660	32	53,120	12/23/20	26	86	10	4	New Construction - Initial	1/1/80
LKVWDR	15350	LAKEVIEW DR	EUCLID ST	CLARION DR	E	6	AAC	2	1,105	36	39,780	12/1/24	100	0	0	0	Overlay - AC Structural	12/1/24
LKVWDR	15355	LAKEVIEW DR	CLARION DR	HERMOSA DR	E	6	AAC	2	1,470	22	32,340	12/1/24	100	0	0	0	Overlay - AC Structural	12/1/24
LKVWDR	15360	LAKEVIEW DR	HERMOSA DR	LAS PALMAS DR	E	6	AAC	2	615	21	12,915	12/1/24	100	0	0	0	Overlay - AC Structural	12/1/24
LKVWDR	15365	LAKEVIEW DR	LAS PALMAS DR	N CITY LIMIT	E	6	AC	2	1,170	28	32,760	5/9/25	82	63	32	5	Surface Treatment - Cape Seal	12/1/24
LAMBRT	15370	LAMBERT DR	WEST AVE	OAK AVE	E	1	AC	2	550	32	17,600	3/19/25	15	97	3	0	Surface Treatment - Slurry Seal	7/1/12
LAMBRT	15375	LAMBERT DR	OAK AVE	PORTER AVE	E	1	AC	2	1,330	32	42,560	5/7/20	53	56	43	1	Surface Treatment - Slurry Seal	7/1/12
LNGDRF	15380	LANGSDORF DR	NUTWOOD AVE	COLLEGE PL	E	4	AC	2	910	32	29,120	4/16/25	80	22	78	0	New Construction - Initial	1/1/80
LANTAN	15390	LANTANA AVE	BERNARD DR	ROLLING HILLS DR	E	6	AC	2	1,195	32	38,240	4/22/25	89	43	57	0	Surface Treatment - Slurry Seal	5/25/20
LANTAN	15395	LANTANA AVE	ROLLING HILLS DR	BOXWOOD AVE	E	6	AAC	2	245	32	7,840	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
LANTAN	15400	LANTANA AVE	BEECHWOOD AVE	OAKWOOD AVE	E	6	AAC	2	650	32	20,800	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
LARIAT	15410	LARIAT PL	END	LAS RIENDAS DR	E	6	AC	2	200	32	6,400	1/7/21	39	63	36	1	New Construction - Initial	1/1/80
LRKELN	15415	LARK ELLEN DR	EVERGREEN AVE	PONDEROSA AVE	E	5	AC	2	309	32	9,888	4/22/25	85	0	100	0	Cold Mill and Overlay	8/1/18
LRKELN	15420	LARK ELLEN DR	PONDEROSA AVE	LAUREL AVE	E	5	AC	2	365	32	11,680	12/4/20	99	0	61	39	Complete Reconstruction - AC	6/1/18
LRKELN	15425	LARK ELLEN DR	PONDEROSA AVE	EVERGREEN AVE	E	5	AC	2	1,006	32	32,192	4/22/25	69	0	61	39	New Construction - Initial	1/1/80
LRKELN	15430	LARK ELLEN DR	EVERGREEN AVE	STATE COLLEGE BLVD	E	5	AC	2	1,430	32	45,760	12/4/20	74	26	62	12	New Construction - Initial	1/1/80
LRKELN	15440	LARK ELLEN DR	STATE COLLEGE BLVD	HEATHER DR	E	5	AC	2	140	57	7,550	6/5/26	100	0	0	0	Surface Treatment - REAS	8/30/25
LRKELN	15445	LARK ELLEN DR	HEATHER DR	ROSALIA DR	E	5	AC	2	970	36	34,920	6/5/26	77	88	12	0	Surface Treatment - REAS	8/28/25
LRKWOD	15450	LARKWOOD DR	POST RD	CANDLEWOOD DR	E	8	AC	2	600	32	19,200	4/17/25	18	65	23	12	New Construction - Initial	1/1/80
LSFALD	15460	LAS FALDAS DR	S END	SAN JUAN DR	E	6	AAC	2	610	26	15,860	4/16/22	100	0	0	0	Overlay - AC Structural	4/16/22
LSFALD	15470	LAS FALDAS DR	SAN JUAN DR	N END	E	6	AAC	2	1,010	32	32,320	4/16/22	100	0	0	0	Surface Reconstruction - AC	4/16/22
LSLNSC	15480	LAS LANAS CIR	LAS LANAS LN	END	E	8	AC	2	130	32	4,160	4/23/25	25	56	42	2	New Construction - Initial	1/1/80
LSLNSL	15485	LAS LANAS LN	LOMA ALTA DR	S END	E	8	AC	2	736	32	23,552	4/11/25	96	0	90	10	Complete Reconstruction - AC	10/1/20
LSLNSL	15490	LAS LANAS LN	CONEJO LN	PARKS RD	E	8	AC	2	1,681	32	53,792	4/23/25	22	61	36	3	New Construction - Initial	1/1/80
LSLNSL	15500	LAS LANAS LN	END	PASEO DORADO	E	8	AC	2	765	32	24,480	4/18/25	17	68	26	6	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
LSPLMS	15510	LAS PALMAS DR	LA TRAVESIA DR	RIDEOUT WAY	E	6	AC	2	1,895	32	60,640	12/3/20	58	76	24	0	New Construction - Initial	1/1/80
LSPLMS	15520	LAS PALMAS DR	RIDEOUT WAY	LAKEVIEW DR	E	6	AC	2	2,240	25	56,000	12/30/20	39	62	27	11	New Construction - Initial	1/1/80
LSPLMS	15530	LAS PALMAS DR	LAKEVIEW DR	HARBOR BL	E	6	AAC	2	1,420	25	35,500	12/1/24	100	0	0	0	Surface Reconstruction - AC	12/1/24
LSPLMS	15535	LAS PALMAS DR	HARBOR BL	ALTURA DR	E	6	AC	2	1,028	30	14,400	12/1/20	61	44	53	3	New Construction - Initial	1/1/80
LSPLMS	15540	LAS PALMAS DR	ALTURA DR	TWILIGHT DR	E	6	AC	2	1,572	32	69,280	1/15/21	43	63	36	1	New Construction - Initial	1/1/80
LSPLMS	15550	LAS PALMAS DR	TWILIGHT DR	PUENTE ST	E	6	AC	2	2,105	32	67,360	12/30/20	38	75	25	0	New Construction - Initial	1/1/80
LSRDCT	15560	LAS RIENDAS CT	LAS RIENDAS DR	END	E	6	AC	2	110	32	3,520	12/1/20	92	0	100	0	Surface Treatment - Slurry Seal	5/25/20
LSRDDR	15570	LAS RIENDAS DR	W CITY LIMIT	END	E	6	AC	2	507	36	20,252	12/30/20	23	77	19	4	New Construction - Initial	1/1/80
LSRDDR	15580	LAS RIENDAS DR	W END	TWILIGHT DR	E	6	AC	2	1,420	32	45,440	12/23/20	43	65	32	3	New Construction - Initial	1/1/80
LSRDDR	15590	LAS RIENDAS DR	TWILIGHT DR	E END	E	6	AC	2	1,000	32	32,000	12/23/20	64	53	47	0	Surface Treatment - Slurry Seal	5/25/20
LSRDDR	15600	LAS RIENDAS DR	W END	SAN MIGUEL DR	E	6	AC	2	700	32	22,400	1/15/21	15	64	30	6	New Construction - Initial	1/1/80
LSRDDR	15610	LAS RIENDAS DR	SAN MIGUEL DR	E END	E	6	AC	2	720	32	23,040	12/1/20	18	73	25	2	New Construction - Initial	1/1/80
LSRDDR	15620	LAS RIENDAS DR	END	PECAN ST	E	6	AC	2	110	32	3,520	1/15/21	12	72	17	11	New Construction - Initial	1/1/80
LAUREL	15630	LAUREL AVE	LARK ELLEN DR	MAPLE AVE	E	5	AC	2	575	32	18,400	5/14/25	87	0	100	0	New Construction - Initial	1/1/80
LAUREL	15635	LAUREL AVE	NORTHERN CITY LIMIT	LARK ELLEN DR	E	5	AC	2	245	32	7,840	5/14/25	82	16	84	0	Complete Reconstruction - AC	6/1/18
LAUTRC	15640	LAUTREC DR	END	VALWOOD DR	E	5	AC	2	270	32	8,640	1/6/21	22	82	17	1	New Construction - Initial	1/1/80
LWNWOD	15650	LAWNWOOD DR	COYOTE HILLS DR	WINTERWOOD DR	E	8	AC	2	320	32	10,240	4/11/25	52	42	57	1	New Construction - Initial	1/1/80
LWRNCE	15660	LAWRENCE AVE	WILSHIRE AVE	COMMONWEALTH AVE	E	3	AC	2	685	32	21,920	11/22/21	83	48	52	0	New Construction - Initial	1/1/80
LWRNCE	15665	LAWRENCE AVE	COMMONWEALTH AVE	SANTA FE AVE	E	3	AC	2	360	32	11,520	11/22/21	95	0	100	0	Complete Reconstruction - AC	6/1/18
LWRNCE	15670	LAWRENCE AVE	VALENCIA DR	ROSSLYNN AVE	E	3	AC	2	1,015	32	32,480	11/22/21	95	0	100	0	Complete Reconstruction - AC	11/1/15
LWRNCE	15675	LAWRENCE AVE	WALNUT AVE	VALENCIA DR	E	3	AC	2	515	32	16,480	11/22/21	95	0	100	0	Cold Mill and Overlay	1/1/17
LEEAVE	15680	LEE AVE	AMERIGE AVE	END	E	7	AC	2	1,350	32	43,200	4/23/25	27	62	25	13	Surface Treatment - Slurry Seal	7/1/12
LEEAVE	15685	LEE AVE	OLIVE AVE	PORTER AVE	E	1	AC	2	895	32	28,640	3/19/25	11	70	15	15	New Construction - AC	1/1/80
LEEAVE	50170	LEE AVE	ASH AVE	OLIVE AVE	E	1	AC	2	799	32	25,568	3/19/25	90	0	100	0	New Construction - AC	1/1/80
LEEAVE	50180	LEE AVE	WEST AVE	ASH AVE	E	7	AC	2	198	32	7,136	3/19/25	8	95	5	0	New Construction - AC	1/1/80
LEGGET	15690	LEGGET PL	ROSECRANS AVE	END	E	8	AC	2	764	32	24,448	4/23/25	89	25	75	0	Surface Treatment - Slurry Seal	6/5/24
LELAND	15700	LELAND DR	WOODS AVE	DRAKE AVE	E	2	AC	2	735	20	14,700	12/20/21	95	0	100	0	New Construction - Initial	1/1/80
LEMNHL	15710	LEMON HILL TERR	END	MALVERN AVE	E	2	AC	2	1,045	32	33,440	12/20/21	18	88	12	0	New Construction - Initial	1/1/80
LEMONS	15720	LEMON ST	BREA BLVD	VIRGINIA RD	E	5	AC	2	1,344	32	43,008	12/3/20	91	0	100	0	New Construction - Initial	1/1/80
LEMONS	15730	LEMON ST	VIRGINIA RD	BERKELEY AVE	E	3	AC	2	1,704	32	54,528	12/21/21	86	29	52	19	New Construction - Initial	1/1/80
LIBRYLN	19490	LIBRARY LN	AMERIGE AVE	COMMONWEALTH AVE	E	2	AC	2	325	32	10,400	12/1/21	60	46	54	0	New Construction - Initial	1/1/80
LIDOPL	15740	LIDO PL	END	DOMINGO RD	E	6	AC	2	450	32	14,400	4/18/25	70	25	49	26	Surface Treatment - Slurry Seal	5/25/20
LIDOPL	15745	LIDO PL	CORONADO DR	END	E	6	AC	2	325	32	10,400	12/30/20	24	84	16	0	New Construction - Initial	1/1/80
LILLIE	15750	LILLIE AVE	END	WILSHIRE AVE	E	4	AC	2	215	26	8,090	5/14/25	91	0	100	0	Surface Treatment - Slurry Seal	6/1/24
LILLIE	15751	LILLIE AVE	WILSHIRE AVE	COMMONWEALTH AVE	E	4	AC	2	635	32	20,320	5/14/25	83	15	85	0	Surface Treatment - Slurry Seal	6/1/24
LILLIE	15755	LILLIE AVE	COMMONWEALTH AVE	SANTA FE AVE	E	4	AC	2	490	32	15,680	2/27/25	82	0	85	15	New Construction - Initial	1/1/80
LIMEAV	15760	LIME AVE	EVERGREEN AVE	ROSALIA DR	E	5	AC	2	565	32	18,080	12/4/20	41	77	23	0	New Construction - Initial	1/1/80
LIMEAV	15770	LIME AVE	END	SANDALWOOD AVE	E	5	AC	2	615	32	19,680	11/25/20	80	0	100	0	New Construction - Initial	1/1/80
LINCOL	15780	LINCOLN AVE	END	MELODY LN	E	5	AC	2	553	28	15,484	4/16/25	62	33	67	0	New Construction - Initial	1/1/80
LINCOL	15790	LINCOLN AVE	MELODY LN	GLENWOOD AVE	E	3	AC	2	1,297	32	41,504	11/17/21	94	0	88	12	New Construction - Initial	1/1/80
LINCOL	15800	LINCOLN AVE	NUTWOOD AVE	BROOKDALE PL	E	3	AC	2	344	32	11,008	11/15/21	87	0	31	69	Surface Treatment - REAS	7/1/23
LINCOL	15805	LINCOLN AVE	BROOKDALE PL	YALE AVE	E	3	AC	2	820	32	26,240	11/17/21	64	64	16	20	Surface Treatment - REAS	7/1/23
LINCOL	15810	LINCOLN AVE	CHAPMAN AVE	COMMONWEALTH AVE	E	3	AC	2	1,250	32	40,000	11/19/21	28	19	75	6	New Construction - Initial	1/1/80
LINCOL	15820	LINCOLN AVE	END	WALNUT AVE	E	3	AC	2	495	32	15,840	11/19/21	86	0	100	0	Grinding (Localized)	7/1/12
LINDA	15830	LINDA LN	SKYLINE DR	END	E	5	AC	2	325	32	10,400	12/3/20	58	56	31	13	New Construction - Initial	1/1/80
LINDAV	15840	LINDA VISTA CIR	END	SKYLINE DR	E	5	AC	2	300	32	9,600	12/3/20	20	81	19	0	New Construction - Initial	1/1/80
LNDNDL	15850	LINDENDALE AVE	END	ALTO LN	E	5	AC	2	1,351	32	35,040	12/3/20	66	60	32	8	New Construction - Initial	1/1/80
LNDNDL	15855	LINDENDALE AVE	HARMONY LN	DOROTHY LN	E	5	AC	2	280	32	8,960	4/16/25	14	82	18	0	New Construction - Initial	1/1/80
LNDNDL	15860	LINDENDALE AVE	DOROTHY LN	RIVERSIDE DR	E	3	AC	2	589	32	8,960	11/17/21	95	0	100	0	New Construction - Initial	1/1/80
LINDY	15870	LINDY PL	FLOWER AVE	OLIVE AVE	E	1	AC	2	275	26	7,150	4/20/23	57	71	29	0	Surface Treatment - Slurry Seal	7/1/12
LINWOD	15880	LINWOOD PL	COMMONWEALTH AVE	WALNUT AVE	E	3	AC	2	690	20	13,800	11/19/21	95	0	90	10	New Construction - Initial	1/1/80
LVEOAK	15890	LIVE OAK AVE	LARK ELLEN DR	ROLLING HILLS DR	E	5	AC	2	1,275	32	40,800	4/22/25	32	75	20	5	New Construction - Initial	1/1/80
LVEOAK	15985	LIVE OAK AVE	ROLLING HILLS DR	END	E	5	AC	2	690	32	22,080	6/5/26	97	0	100	0	Surface Treatment - REAS	8/28/25
LLOYD	15900	LLOYD AVE	COMMONWEALTH AVE	CAROL DR	E	7	AC	2	415	32	13,280	4/27/23	93	0	100	0	New Construction - Initial	1/1/80
LOCKLN	15910	LOCKLIN WAY	FAIRFORD DR	SUNNY RIDGE DR	E	8	AC	2	135	32	4,320	4/23/25	25	64	18	18	New Construction - Initial	1/1/80
LOCKLN	15915	LOCKLIN WAY	SUNNY RIDGE DR	BARONET PL	E	8	AC	2	150	32	4,800	4/22/25	44	50	49	1	New Construction - Initial	1/1/80
LOCUST	15920	LOCUST DR	THOMAS WAY	CHAPMAN AVE	E	7	AC	2	660	26	17,160	4/2/25	22	67	5	28	New Construction - Initial	1/1/80
LOCUST	15930	LOCUST DR	VALENCIA DR	OAK AVE	E	1	AC	2	760	32	24,320	3/25/25	87	0	30	70	Complete Reconstruction - AC	6/1/18
LOCUST	15935	LOCUST DR	OAK AVE	SOUTHGATE AVE	E	1	AC	2	1,070	32	34,240	3/25/25	31	45	23	32	Surface Treatment - Slurry Seal	7/1/12
LOCUST	15940	LOCUST DR	ROBERTA AVE	HOUSTON AVE	E	1	AC	2	450	32	14,400	4/11/23	90	0	100	0	New Construction - Initial	1/1/80
LOISLN	15950	LOIS LN	FERN DR	WOODS AVE	E	2	AC	2	1,090	28	30,520	12/20/21	94	0	81	19	New Construction - Initial	1/1/80
LOMALT	15960	LOMA ALTA DR	GILBERT ST	LOMA VERDE DR	E	8	AC	2	2,020	32	64,640	4/11/25	93	0	74	26	Complete Reconstruction - AC	10/1/20
LOMAVR	15970	LOMA VERDE DR	GILBERT ST	SUNRISE LN	E	8	AC	2	1,645	32	52,640	4/11/25	93	0	23	77	Complete Reconstruction - AC	10/1/20
LOMBRD	15980	LOMBARD DR	WOODCREST AVE	END	E	2	AC	2	1,395	32	44,640	11/24/21	93	0	100	0	Surface Treatment - Slurry Seal	6/1/19
LNGSPR	15990	LONG SPUR DR	END	STARLING DR	E	4	AC	2	910	32	24,160	2/27/25	86	0	100	0	Surface Treatment - Slurry Seal	5/25/20
LNGSPR	16000	LONG SPUR DR	STARLING DR	END	E	4	AC	2	652	32	8,640	2/27/25	87	0	100	0	Surface Treatment - Slurry Seal	5/25/20
LNGVWD	16010	LONGVIEW DR	BREA BLVD	SKYLINE DR	E	5	AC	2	1,915	36	68,940	4/15/25	39	59	33	8	New Construction - Initial	1/1/80
LNGVWD	16020	LONGVIEW DR	SKYLINE DR	HARMONY LN	E	5	AC	2	2,030	36	73,080	4/15/25	67	54	46	0	New Construction - Initial	1/1/80
LNGVWD	16030	LONGVIEW DR	HARMONY LN	DOROTHY LN	E	5	AC	2	355	36	12,780	4/15/25	61	50	50	0	New Construction - Initial	1/1/80
LSCOYO	16040	LOS COYOTES DR	WESTERN CITY LIMIT	CLEAR CREEK DR	E	8	AC	2	130	32	4,160	3/26/25	7	38	62	0	New Construction - Initial	1/1/80
LOUISE	16050	LOUISE PL	MAGNOLIA AVE	PRITCHARD AVE	E	7	AC	2	765	32	24,480	5/9/25	93	0	100	0	Surface Treatment - Slurry Seal	6/1/24
LOUISE	16060	LOUISE PL	WANDA DR	PACIFIC DR	E	7	AAC	2	415	26	10,790	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
LOVELL	16070	LOVELL PL	W END	TWILIGHT DR	E	6	AC	2	145	32	4,640	12/30/20	33	37	36	27	New Construction - Initial	1/1/80
LOVELL	16080	LOVELL PL	TWILIGHT DR	E END	E	6	AC	2	505	32	16,160	12/30/20	37	40	56	4	New Construction - Initial	1/1/80
LOVRNG	16090	LOVERING AVE	BAKER AVE	HOUSTON AVE	E	1	AC	2	700	32	22,400	4/11/23	21	85	15	0	Surface Treatment - Slurry Seal	7/1/12
LUANNE	16100	LUANNE AVE	SKYLINE DR	CANNON LN	E	5	AC	2	1,185	28	33,180	4/15/25	74	29	41	30	New Construction - Initial	1/1/80
MACART	16110	MAC ARTHUR AVE	PRITCHARD AVE	END	E	7	AC	2	125	32	4,000	4/25/23	45	65	35	0	New Construction - Initial	1/1/80
MADERA	16120	MADERA PL	END	TERRAZA PL	E	6	AC	2	520	32	16,640	1/6/21	20	70	18	12	New Construction - Initial	1/1/80
MADISA	16130	MADISON AVE	END	PLACENTIA AVE	E	4	AC	2	715	37	28,955	2/27/25	76	0	36	64	New Construction - Initial	1/1/80
MADNNA	16140	MADONNA DR	SAN RAMON DR	END	E	6	AC	1	1,055	32	33,760	12/23/20	27	76	22	2	New Construction - Initial	1/1/80
MADNNA	16150	MADONNA DR	LAS PALMAS DR	HERMOSA DR	E	6	AAC	2	885	32	28,320	10/5/24	100	0	0	0	Overlay - AC Structural	10/5/24
MADNNA	16155	MADONNA DR	HERMOSA DR	ARBOLADO DR	E	6	AC	2	285	32	9,120	11/25/20	100	0	100	0	Cold Mill and Overlay	8/1/17
MADNNA	16160	MADONNA DR	ARBOLADO DR	END	E	6	AC	2	1,985	32	63,520	11/25/20	100	0	100	0	Complete Reconstruction - AC	8/1/17
MAERTN	16170	MAERTIN LN	DOROTHY LN	END	E	4	AC	2	220	27	5,940	12/15/20	59	61	39	0	Surface Treatment - Slurry Seal	5/25/20
MAERTN	16180	MAERTIN LN	VICTORIA DR	GROVE PL	E	4	AC	2	1,398	32	44,736	11/24/20	52	72	28	0	New Construction - Initial	1/1/80
MALDEN	16183	MALDEN AVE	N END	FORD AVE	E	2	AAC	2	220	32	7,040	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
MALDEN	16186	MALDEN AVE	FORD AVE	S END	E	2	AAC	2	797	32	25,504	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
MALDEN	16190	MALDEN AVE	UNION AVE	CHAPMAN AVE	E	2	AC	2	1,290	32	41,280	12/2/21	30	70	25	5	New Construction - Initial	1/1/80
MALDEN	16195	MALDEN AVE	CHAPMAN AVE	COMMONWEALTH AVE	E	2	AC	2	1,260	32	40,320	12/2/21	69	0	100	0	New Construction - Initial	1/1/80
MALDEN	16200	MALDEN AVE	COMMONWEALTH AVE	SANTA FE AVE	E	2	AC	2	330	32	10,560	12/3/21	90	0	100	0	New Construction - Initial	1/1/80
MALDEN	16205	MALDEN AVE	TRUSLOW AVE	VALENCIA DR	E	2	AC	2	370	32	11,840	12/1/21	94	0	100	0	New Construction - Initial	1/1/80
MALDEN	16210	MALDEN AVE	VALENCIA DR	ROSSLYNN AVE	E	2	AC	2	960	32	30,720	11/22/21	95	0	100	0	Surface Treatment - Slurry Seal	6/1/18
MALDEN	16215	MALDEN AVE	ROSSLYNN AVE	HILL AVE	E	2	AC	2	870	32	27,840	11/22/21	92	0	100	0	New Construction - Initial	1/1/80
MALVEA	16220	MALVERN AVE	WOODS AVE	DRAKE AVE	E	2	AC	2	680	32	21,760	12/20/21	91	0	100	0	New Construction - Initial	1/1/80
MALVEA	16223	MALVERN AVE	DRAKE AVE	RICHMAN AVE	E	2	AC	2	620	32	19,840	12/20/21	100	0	0	0	Complete Reconstruction - AC	5/25/20
MALVEA	16226	MALVERN AVE	RICHMAN AVE	MALDEN AVE	E	2	AC	2	2,015	36	72,540	12/17/21	82	0	100	0	Cold Mill and Overlay	6/1/18
MALVEA	16230	MALVERN AVE	MALDEN AVE	HARBOR BLVD	E	2	AC	2	620	36	22,320	12/17/21	87	0	100	0	New Construction - Initial	1/1/80
MANHTN	16240	MANHATTAN AVE	ORANGETHORPE AVE	BURTON ST	E	3	AC	2	1,840	32	58,880	12/23/21	45	31	61	8	New Construction - Initial	1/1/80
MANZNT	16250	MANZANITA DR	CAMINO REY	CAMINO DEL SOL	E	8	AC	2	1,690	32	54,080	4/22/25	30	44	41	15	New Construction - Initial	1/1/80
MAPLE	16260	MAPLE AVE	NORTHERN CITY LIMIT	LAUREL AVE	E	5	AC	2	1,530	32	48,960	4/22/25	99	0	100	0	Complete Reconstruction - AC	5/25/20
MAPLE	16270	MAPLE AVE	LAUREL AVE	ROLLING HILLS DR	E	5	AC	2	550	32	17,600	4/22/25	99	0	69	31	Complete Reconstruction - AC	5/25/20
MAPLE	16275	MAPLE AVE	ROLLING HILLS DR	END	E	5	AC	2	980	32	31,360	12/22/20	67	25	74	1	New Construction - Initial	1/1/80
MAPLWD	16280	MAPLEWOOD AVE	ROOSEVELT AVE	WOODS AVE	E	2	AC	2	1,110	32	35,520	12/1/21	33	87	13	0	Surface Treatment - Slurry Seal	7/1/12
MAPLWD	16290	MAPLEWOOD AVE	WOODS AVE	WEST AVE	E	2	AC	2	1,220	32	39,040	11/29/21	27	74	19	7	New Construction - Initial	1/1/80
MARLEN	16300	MARELEN DR	SUNNYCREST DR	ROBIN WAY	E	7	AC	2	1,855	32	59,360	4/8/25	89	0	95	5	New Construction - Initial	1/1/80
MARLEN	16310	MARELEN DR	ROBIN WAY	SUNNYCREST DR	E	7	AC	2	290	32	9,280	2/3/20	95	0	100	0	New Construction - Initial	1/1/80
MARGRT	16320	MARGARET PL	CHERRY AVE	END	E	1	AC	2	160	32	5,120	4/18/23	90	0	86	14	Surface Treatment - Slurry Seal	7/1/12
MARGTA	16330	MARGARITA DR	END	VALENCIA MESA DR	E	7	AC	2	585	28	16,380	5/8/25	94	0	100	0	Surface Treatment - REAS	8/16/24
MARIE	16340	MARIE AVE	JACARANDA PL	WILSHIRE AVE	E	7	AC	2	795	26	20,670	12/22/21	69	76	21	3	New Construction - Initial	1/1/80
MARIE	16350	MARIE AVE	END	AMERIGE AVE	E	7	AC	2	205	26	5,330	4/1/25	14	91	3	6	New Construction - Initial	1/1/80
MARGLD	16360	MARIGOLD AVE	SUDENE AVE	END	E	3	AC	2	340	32	10,880	5/14/25	83	14	86	0	Surface Treatment - Slurry Seal	6/1/24
MARION	16370	MARION BLVD	CLAIRE AVE	MELVILLE DR	E	5	AC	2	1,010	26	26,260	5/9/25	95	75	25	0	Surface Treatment - Slurry Seal	6/1/24
MARION	16375	MARION BLVD	MELVILLE DR	BREA	E	5	AC	2	1,947	36	70,092	12/3/20	65	55	32	13	New Construction - Initial	1/1/80
MARPSA	16380	MARIPOSA LN	CAMINO CENTROLOMA	END	E	8	AC	2	530	32	16,960	4/21/25	45	50	38	12	New Construction - Initial	1/1/80
MARPSA	16390	MARIPOSA LN	LAS LANAS LN	PARKS RD	E	8	AC	2	920	32	29,440	4/23/25	20	60	40	0	New Construction - Initial	1/1/80
MARPSA	16400	MARIPOSA LN	END	PASEO DORADO	E	8	AC	2	505	32	16,160	4/18/25	27	66	31	3	New Construction - Initial	1/1/80
MARTHA	16410	MARTHA PL	END	GREGORY AVE	E	7	AC	2	500	26	13,000	4/2/25	95	0	100	0	New Construction - Initial	1/1/80
MARTHA	16420	MARTHA PL	GREGORY AVE	END	E	7	AC	2	125	32	4,000	4/2/25	21	94	6	0	New Construction - Initial	1/1/80
MARWOD	16430	MARWOOD AVE	END	WILSHIRE AVE	E	2	AC	2	510	32	16,320	12/20/21	63	63	36	1	New Construction - Initial	1/1/80
MARYMO	16435	MARYMONT AVE	W END	CAMBRIDGE AVE	E	4	AC	2	110	32	3,520	11/24/20	100	0	0	100	New Construction - Initial	1/1/80
MAURNE	16440	MAURINE PL	LINDENDALE AVE	END	E	5	AC	2	220	32	7,040	12/22/20	62	29	71	0	New Construction - Initial	1/1/80
MAXWLL	16450	MAXWELL AVE	PORTER AVE	SOUTHERN CITY LIMIT	E	1	AC	2	370	32	11,840	4/27/23	93	0	100	0	Surface Treatment - Slurry Seal	10/1/22
MAXZIM	16460	MAXZIM AVE	ROBERTA AVE	COURTNEY AVE	E	1	AC	2	860	32	27,520	4/12/23	53	75	17	8	Surface Treatment - Slurry Seal	7/1/12
MAXZIM	16470	MAXZIM AVE	PACIFIC DR	EADINGTON AVE	E	1	AC	2	1,100	32	35,200	4/11/23	25	79	19	2	Surface Treatment - Slurry Seal	7/1/12
MAXZIM	16480	MAXZIM AVE	EADINGTON AVE	BASQUE AVE	E	1	AC	2	965	32	30,880	4/11/23	20	72	4	24	Surface Treatment - Slurry Seal	7/1/12
MAXZIM	16485	MAXZIM AVE	BASQUE AVE	ORCHARD AVE	E	1	AC	2	915	32	29,280	4/11/23	28	88	5	7	Surface Treatment - Slurry Seal	7/1/12
MAXZIM	16490	MAXZIM AVE	ROOSEVELT AVE	LOMBARD DR	E	2	AC	2	1,720	32	55,040	11/24/21	89	0	100	0	Surface Treatment - Slurry Seal	6/1/19
MAXZIM	16500	MAXZIM AVE	END	RICHMAN AVE	E	2	AC	2	300	26	7,800	11/24/21	93	0	100	0	New Construction - Initial	1/1/80
MAXZIM	16505	MAXZIM AVE	RICHMAN AVE	ROBERTA AVE	E	2	AC	2	754	26	19,604	11/24/21	91	0	100	0	New Construction - Initial	1/1/80
MEADE	16510	MEADE AVE	VALENCIA DR	ASH AVE	E	1	AAC	2	593	32	18,976	4/27/23	94	0	75	25	Overlay - AC Structural	4/16/22
MEADE	16520	MEADE AVE	OAK AVE	END	E	1	AC	2	1,200	32	38,400	4/27/23	91	0	95	5	Surface Treatment - Slurry Seal	10/1/22
MEADOW	16530	MEADOW LN	END	SYCAMORE AVE	E	5	AC	2	405	32	12,960	5/8/25	72	72	28	0	New Construction - Initial	1/1/80
MEDFRD	16540	MEDFORD PL	ROLLING HILLS DR	CLAIRMONT ST	E	4	AC	2	1,140	32	36,480	11/24/20	89	0	92	8	Surface Treatment - Slurry Seal	5/25/20
MEDFRD	16550	MEDFORD PL	END	MYSTIC AVE	E	4	AC	2	230	32	7,360	11/24/20	85	16	84	0	Surface Treatment - Slurry Seal	5/25/20
MELODY	16560	MELODY LN	LINCOLN AVE	STANFORD AVE	E	5	AC	2	790	32	25,280	4/16/25	73	32	44	24	New Construction - Initial	1/1/80
MELODY	16562	MELODY LN	STANFORD AVE	RAYMOND AVE	E	5	AC	2	270	32	8,640	4/16/25	61	44	56	0	New Construction - Initial	1/1/80
MELODY	16565	MELODY LN	NORMAN PL	HOLLYDALE DR	E	5	AAC	2	294	32	15,680	5/5/25	100	0	0	0	Overlay - AC Structural	5/5/25
MELODY	16570	MELODY LN	KENSINGTON DR	ACACIA AVE	E	5	AC	2	1,520	32	48,640	4/16/25	28	70	25	5	New Construction - Initial	1/1/80
MELODY	16575	MELODY LN	ACACIA AVE	FULLERTON CREEK DR	E	5	AC	2	660	32	21,120	4/16/25	47	58	35	7	New Construction - Initial	1/1/80
MELODY	16580	MELODY LN	VICTORIA DR	STATE COLLEGE BLVD	E	5	AC	2	1,165	32	37,280	4/21/25	19	80	12	8	New Construction - Initial	1/1/80
MELVLE	16590	MELVILLE DR	MARION BLVD	MARION BLVD/AVALON DR	E	5	AC	2	1,100	32	35,200	12/22/20	56	54	42	4	New Construction - Initial	1/1/80
MERLIN	16600	MERLIN AVE	ROLLING HILLS DR	END	E	5	AC	2	990	32	31,680	12/4/20	32	70	25	5	New Construction - Initial	1/1/80
MESVRD	16610	MESA VERDE	W END	CAMINO LA VISTA	E	8	AC	2	340	32	10,880	4/22/25	17	54	38	8	New Construction - Initial	1/1/80
MESVRD	16620	MESA VERDE	CAMINO LA VISTA	E END	E	8	AC	2	340	32	10,880	4/22/25	23	48	41	11	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
MESVRD	16630	MESA VERDE	CAMINO DEL SOL	END	E	8	AC	2	745	32	23,840	4/11/25	24	53	36	11	New Construction - Initial	1/1/80
MESITA	16640	MESITA PL	ARBOLADO DR	END	E	6	AAC	2	185	32	5,920	12/1/20	99	0	100	0	Overlay - AC Structural	8/1/17
MICHAL	16650	MICHAEL AVE	WILSHIRE AVE	END	E	7	AC	2	715	32	22,880	12/22/21	25	81	18	1	New Construction - Initial	1/1/80
MICHAL	16660	MICHAEL AVE	END	AMERIGE AVE	E	7	AC	2	205	26	5,330	4/1/25	22	82	5	13	New Construction - Initial	1/1/80
MIDLSX	16670	MIDDLESEX PL	END	CLAIRMONT ST	E	4	AAC	2	440	32	14,080	11/24/20	100	0	0	0	Overlay - AC Structural	5/25/20
MIDLSX	16680	MIDDLESEX PL	END	MYSTIC AVE	E	4	AC	2	460	32	14,720	11/24/20	88	0	100	0	Surface Treatment - Slurry Seal	5/25/20
MIGUEL	16690	MIGUEL PL	END	DOMINGO RD	E	6	AC	2	600	32	19,200	12/4/20	24	68	14	18	New Construction - Initial	1/1/80
MIGUEL	16700	MIGUEL PL	CORONADO DR	END	E	6	AC	2	350	32	11,200	12/30/20	16	91	6	3	New Construction - Initial	1/1/80
MILGRO	16710	MILAGRO WAY	END	LA TRAVESIA DR	E	6	AC	2	195	32	6,240	12/11/20	35	61	34	5	New Construction - Initial	1/1/80
MILTON	16720	MILTON AVE	ASSOCIATED RD	DEREK DR	E	4	AC	2	1,190	32	38,080	11/24/20	85	0	96	4	Surface Treatment - Slurry Seal	5/25/20
MIMOSA	16730	MIMOSA PL	SEQUIOA AVE	END	E	5	AC	2	130	32	4,160	11/25/20	86	0	100	0	New Construction - Initial	1/1/80
MIMOSA	16740	MIMOSA PL	MAPLE AVE	BEECHWOOD AVE	E	5	AC	2	1,315	32	42,080	11/25/20	91	0	100	0	MILL and OVERLAY	7/1/13
MIMOSA	16750	MIMOSA PL	MERLIN AVE	END	E	5	AC	2	420	32	13,440	12/4/20	26	74	14	12	New Construction - Initial	1/1/80
MIMOSA	16760	MIMOSA PL	LIVE OAK AVE	END	E	5	AC	2	130	32	4,160	6/5/26	95	0	100	0	Surface Treatment - REAS	8/28/25
MIRDOR	16770	MIRADOR CIR	END	LA ENTRADA PL	E	6	AC	2	250	32	8,000	4/18/25	74	16	84	0	Surface Treatment - Slurry Seal	5/25/20
MRMARD	16780	MIRAMAR DR	LONGVIEW DR	VALLE VISTA DR	E	5	AC	2	660	32	21,120	4/15/25	80	10	90	0	New Construction - Initial	1/1/80
MRMARD	16790	MIRAMAR DR	SKYLINE DR	HOLLYDALE DR	E	5	AC	2	1,590	32	82,400	1/13/21	60	48	48	4	New Construction - Initial	1/1/80
MRMARD	16795	MIRAMAR DR	HOLLYDALE DR	LINDENDALE AVE	E	5	AC	2	986	32	31,552	4/16/25	44	67	25	8	New Construction - Initial	1/1/80
MRMARD	16800	MIRAMAR DR	LINDENDALE AVE	END	E	5	AC	2	1,349	32	40,480	4/16/25	28	72	27	1	New Construction - Initial	1/1/80
MRMARP	16810	MIRAMAR PL	KROEGER AVE	END	E	5	AC	2	200	26	5,200	1/6/21	23	76	24	0	New Construction - Initial	1/1/80
MRMARP	16820	MIRAMAR PL	END	RAYMOND AVE	E	5	AC	1	220	32	7,040	1/6/21	21	76	14	10	New Construction - Initial	1/1/80
MRMNT	16830	MIRAMONTE DR	VALENCIA MESA DR	VALENCIA MESA DR	E	7	AC	2	1,240	35	43,400	5/8/25	91	0	100	0	Surface Treatment - REAS	8/16/24
MISSON	16840	MISSION DR	BALFOUR AVE	COMMONWEALTH AVE	E	4	AC	2	235	32	7,520	2/27/25	86	0	100	0	New Construction - Initial	1/1/80
MISSON	16845	MISSION DR	COMMONWEALTH AVE	SANTA CLARA AVE	E	4	AAC	2	680	32	21,760	9/15/24	100	0	0	0	Overlay - AC Structural	9/15/24
MODRNO	16850	MODERNO PL	LAKEVIEW DR	END	E	6	AC	2	530	32	16,960	5/9/25	82	57	43	0	Surface Treatment - Cape Seal	12/1/24
MONTGE	16860	MONTAGUE AVE	WILSHIRE AVE	COMMONWEALTH AVE	E	3	AC	2	700	32	22,400	12/6/21	94	0	100	0	New Construction - Initial	1/1/80
MONTGE	16865	MONTAGUE AVE	COMMONWEALTH AVE	END	E	3	AC	2	680	27	18,360	5/14/25	81	62	38	0	Surface Treatment - Slurry Seal	6/1/24
MOTMVS	16870	MONTE MAR VISTA DR	END	WOODS AVE	E	2	AC	2	145	28	4,060	12/20/21	84	0	79	21	New Construction - Initial	1/1/80
MOODY	16880	MOODY AVE	END	ALMIRA AVE	E	4	AC	2	600	25	15,000	11/24/20	80	29	50	21	Surface Treatment - Slurry Seal	5/25/20
MOODY	16890	MOODY AVE	SANTA YSABEL AVE	SANTA CLARA AVE	E	4	AAC	2	470	32	15,040	9/8/24	100	0	0	0	Overlay - AC Structural	9/8/24
MOONBM	16900	MOONBEAM PL	LOMA ALTA DR	END	E	8	AC	2	160	32	5,120	4/11/25	95	0	100	0	Complete Reconstruction - AC	10/1/20
MOORE	16910	MOORE AVE	END	BURNING TREE RD	E	8	AC	2	880	38	35,000	4/25/23	59	0	96	4	New Construction - Initial	1/1/80
MOORE	16913	MOORE AVE	BURNING TREE RD	GILBERT ST	E	8	AC	3	1,575	38	59,850	4/25/23	72	3	60	37	New Construction - Initial	1/1/80
MORLAA	16920	MORELIA AVE	LAGUNA DR	PINATA PL	E	6	AAC	2	765	32	24,480	8/4/23	100	0	0	0	Overlay - AC Structural	8/4/23
MORLAA	50007	MORELIA AVE	PINATA PL	BASTANCHURY RD	E		AAC	0	400	32	12,800	4/16/22	100	0	0	0	Overlay - AC Structural	4/16/22
MORLAP	16930	MORELIA PL	MORELIA AVE	LAGUNA RD	E	6	AC	2	960	30	28,800	12/4/20	60	19	65	16	New Construction - Initial	1/1/80
MNTRDG	16940	MOUNTAIN RIDGE DR	STATE COLLEGE BLVD	BASTANCHURY RD	E	4	AC	2	1,952	32	62,464	4/21/25	84	0	79	21	New Construction - Initial	1/1/80
MNTVWP	16945	MOUNTAIN VIEW PL	HALE AVE	FULLERTON CREEK DR	E	5	AC	2	2,330	32	74,560	12/10/20	64	37	60	3	New Construction - Initial	1/1/80
MNTVWP	16950	MOUNTAIN VIEW PL	VICTORIA DR	CHAPMAN AVE	E	4	AC	2	2,130	32	68,160	4/15/25	74	46	48	6	New Construction - Initial	1/1/80
MNTVWP	16960	MOUNTAIN VIEW PL	CHAPMAN AVE	WILSHIRE AVE	E	4	AC	2	495	32	15,840	5/8/25	87	75	25	0	Surface Treatment - Slurry Seal	6/1/24
MNTVWP	16970	MOUNTAIN VIEW PL	COMMONWEALTH AVE	SANTA FE AVE	E	4	AC	2	490	32	15,680	4/21/25	91	0	100	0	Surface Treatment - Slurry Seal	5/25/20
MULBRY	16980	MULBERRY AVE	NORTHERN CITY LIMIT	SAN ANTONIO AVE	E	6	AC	2	750	32	24,000	4/22/25	93	0	80	20	New Construction - Initial	1/1/80
MURDOC	16990	MURDOC PL	WALNUT AVE	END	E	7	AC	2	240	32	7,680	4/27/23	89	0	100	0	New Construction - Initial	1/1/80
MYSTIC	17000	MYSTIC AVE	DEERPARK DR	END	E	4	AC	2	575	32	18,400	12/4/20	13	82	9	9	New Construction - Initial	1/1/80
MYSTIC	17010	MYSTIC AVE	CAMBRIDGE AVE	PLACENTIA AVE	E	4	AC	2	1,140	32	36,480	11/24/20	84	31	48	21	Surface Treatment - Slurry Seal	5/25/20
NANCY	17020	NANCY LN	LONGVIEW DR	END	E	5	AC	2	745	32	23,840	12/3/20	14	72	4	24	New Construction - Initial	1/1/80
NAPAPL	17030	NAPA PL	WALNUT AVE	END	E	7	AC	2	235	32	7,520	4/27/23	91	0	67	33	New Construction - Initial	1/1/80
NAPLES	17040	NAPLES PL	END	BAKER AVE	E	1	AC	2	170	32	5,440	4/17/23	23	95	5	0	Surface Treatment - Slurry Seal	7/1/12
NELSON	17050	NELSON PL	END	LAS PALMAS DR	E	6	AC	2	480	32	15,360	12/30/20	26	86	10	4	New Construction - Initial	1/1/80
NEWLLA	17060	NEWELL AVE	VALENCIA DR	ELM AVE	E	3	AC	2	675	32	21,600	11/22/21	95	0	93	7	New Construction - Initial	1/1/80
NEWLLP	17070	NEWELL PL	CHAPMAN AVE	WILSHIRE AVE	E	3	AC	2	525	26	13,650	11/19/21	22	54	41	5	New Construction - Initial	1/1/80
NEWKRK	17080	NEWKIRK AVE	VALENCIA DR	ELM AVE	E	3	AC	2	675	32	21,600	11/22/21	95	0	100	0	New Construction - Initial	1/1/80
NICKLT	17090	NICKLETT AVE	CHERRY AVE	ORANGETHORPE AVE	E	1	AC	2	820	32	26,240	4/18/23	89	0	68	32	Surface Treatment - Slurry Seal	7/1/12
NICLSD	17100	NICOLAS DR	END	CAMINO DEL SOL	E	8	AC	2	910	36	32,760	4/11/25	41	36	47	17	New Construction - Initial	1/1/80
NICOLASST	22012	NICOLAS ST	HUGHES DR	HETEBRINK ST	E		AC	0	900	36	32,400	4/18/22	100	0	0	0	New Construction - Initial	4/18/22
NIETO	17120	NIETO PL	XIMENO DR	CIENAGA DR	E	6	AC	2	290	32	9,280	12/23/20	46	56	44	0	New Construction - Initial	1/1/80
NORBY	17130	NORBY LN	STEPHENS AVE	END	E	7	AAC	2	510	32	16,320	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
NORMNA	17140	NORMAN AVE	SUDENE AVE	END	E	3	AC	2	350	27	9,450	5/14/25	83	52	48	0	Surface Treatment - Slurry Seal	6/1/24
NORMNP	17150	NORMAN PL	END	MELODY LN	E	5	AAC	2	260	32	8,320	5/5/25	100	0	0	0	Overlay - AC Structural	5/5/25
NORMNP	17160	NORMAN PL	FERN DR	GLENWOOD AVE	E	3	AC	2	370	32	11,840	11/17/21	16	85	11	4	New Construction - Initial	1/1/80
NORMNP	17170	NORMAN PL	END	NUTWOOD AVE	E	3	AC	2	105	32	4,610	11/18/21	40	55	45	0	New Construction - Initial	1/1/80
NORTHAMDR	22006	NORTHAM DR	STARBUCKS ST	THATCHER ST	E		AC	0	1,100	40	44,000	4/18/22	100	0	0	0	New Construction - Initial	4/18/22
NORTHAMDR	22007	NORTHAM DR	THATCHER ST	NICOLAS WAY	E		AC	0	1,550	40	61,500	4/18/22	100	0	0	0	New Construction - Initial	4/18/22
NUTWOA	17190	NUTWOOD AVE	YALE AVE	RAYMOND AVE	E	3	AAC	2	1,485	32	47,520	8/1/22	100	0	0	0	Overlay - AC Structural	8/1/22
NUTWOA	17200	NUTWOOD AVE	RAYMOND AVE	RIEDEL AVE	E	3	AC	2	1,070	32	34,240	11/17/21	61	48	48	4	New Construction - Initial	1/1/80
NUTWOA	17210	NUTWOOD AVE	VICTORIA DR	ACACIA AVE	E	3	AC	2	700	32	22,400	12/6/21	95	0	100	0	New Construction - Initial	1/1/80
NUTWOA	17215	NUTWOOD AVE	ACACIA AVE	HALE AVE	E	4	AC	2	1,085	32	34,720	4/15/25	23	59	39	2	New Construction - Initial	2/19/11
NUTWOA	17220	NUTWOOD AVE	HALE AVE	STATE COLLEGE BLVD	E	4	AC	2	1,542	32	49,344	4/15/25	23	53	37	10	New Construction - Initial	1/1/80
OAKAVE	17230	OAK AVE	HASTING AVE	MEADE AVE	E	1	AC	2	1,000	32	32,000	4/12/23	100	0	0	0	Surface Treatment - Slurry Seal	10/1/22
OAKAVE	17240	OAK AVE	MAGNOLIA AVE	JENSEN WAY	E	1	AC	2	1,850	32	59,200	4/20/23	85	28	72	0	New Construction - Initial	1/1/80
OAKAVE	17250	OAK AVE	PINE AVE	COURTNEY AVE	E	1	AC	2	1,005	32	32,160	4/12/23	59	52	32	16	Surface Treatment - Slurry Seal	7/1/12
OAKAVE	17255	OAK AVE	COURTNEY AVE	BROOKHURST RD	E	1	AC	2	1,265	32	40,480	4/18/23	83	0	100	0	Surface Treatment - Slurry Seal	7/1/12

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
OAKAVE	17260	OAK AVE	BROOKHURST AVE	LOCUST DR	E	1	AC	2	337	32	10,784	3/25/25	95	0	100	0	Complete Reconstruction - AC	6/1/18
OAKAVE	17265	OAK AVE	LOCUST DR	PACIFIC DR	E	1	AC	2	815	32	26,080	3/25/25	18	96	4	0	Surface Treatment - Slurry Seal	7/1/12
OAKAVE	17270	OAK AVE	EADINGTON AVE	BASQUE AVE	E	1	AC	2	1,290	32	41,280	3/19/25	14	85	15	0	Surface Treatment - Slurry Seal	7/1/12
OAKAVE	17280	OAK AVE	BASQUE AVE	CITRUS AVE	E	1	AC	2	1,870	32	59,840	4/21/25	49	65	35	0	Surface Treatment - Slurry Seal	7/1/12
OAKAVE	17290	OAK AVE	ADAMS AVE	END	E	2	AC	2	160	32	5,120	2/17/22	33	66	22	12	Surface Treatment - Slurry Seal	7/1/12
OAKAVE	50160	OAK AVE	LOCUST DR	EADINGTON AVE	E	1	AC	2	283	32	9,056	3/25/25	27	72	28	0	Surface Treatment - Slurry Seal	7/1/12
OAKRDG	17310	OAK RIDGE CT	END	HOLLYOAK DR	E	5	AC	2	165	26	4,290	4/22/25	90	0	100	0	New Construction - Initial	1/1/80
OAKRDG	17315	OAK RIDGE CT	END	MOUNTAIN RIDGE DR	E	4	AC	2	270	26	7,020	4/21/25	83	0	58	42	New Construction - Initial	1/1/80
OAKDLE	17300	OAKDALE AVE	DOROTHY LN	RIVERSIDE DR	E	3	AC	2	1,145	32	36,640	11/17/21	9	87	13	0	New Construction - Initial	1/1/80
OAKWOD	17320	OAKWOOD AVE	FIRETHORNE AVE	LANTANA AVE	E	6	AAC	2	490	32	15,680	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
OCNVWD	17330	OCEAN VIEW DR	GRANDVIEW AVE	GRANDVIEW AVE	E	2	AC	2	1,093	28	30,604	12/20/21	27	81	11	8	New Construction - Initial	1/1/80
ODELL	17340	ODELL PL	GREGORY AVE	END	E	7	AC	2	235	26	6,110	4/2/25	30	88	7	5	New Construction - Initial	1/1/80
OLDCRK	17350	OLD CREEK LN	VICTORIA DR	SYCAMORE AVE	E	5	AC	2	380	32	12,160	5/8/25	76	0	28	72	New Construction - Initial	1/1/80
OLDRVR	17355	OLD RIVER RD	CONCORD AVE	SYCAMORE AVE	E	5	AC	2	332	32	10,624	5/8/25	89	25	75	0	New Construction - Initial	1/1/80
OLDRVR	17360	OLD RIVER RD	SYCAMORE AVE	VICTORIA DR	E	5	AC	2	1,255	32	40,160	5/8/25	92	0	91	9	New Construction - Initial	1/1/80
OLINST	17370	OLIN ST	VALENCIA DR	FRANKLIN AVE	E	1	AC	2	396	32	12,672	4/20/23	31	76	21	3	Surface Treatment - Slurry Seal	7/1/12
OLINST	17375	OLIN ST	FRANKLIN AVE	SOUTH END	E	1	AC	2	240	32	7,680	4/20/23	52	69	30	1	Surface Treatment - Slurry Seal	7/1/12
OLIVE	17380	OLIVE AVE	HASTINGS AVE	MEADE AVE	E	1	AC	2	950	32	30,400	4/27/23	92	0	100	0	Surface Treatment - Slurry Seal	10/1/22
OLIVE	17385	OLIVE AVE	MAGNOLIA AVE	VINE AVE	E	1	AC	2	590	32	18,880	4/20/23	95	0	100	0	Cold Mill and Overlay	10/1/17
OLIVE	17390	OLIVE AVE	VINE AVE	LINDY PL	E	1	AC	2	975	32	31,200	4/20/23	94	0	91	9	Cold Mill and Overlay	10/1/17
OLIVE	17395	OLIVE AVE	LINDY PL	PINE DR	E	1	AC	2	1,245	32	39,840	4/20/23	86	0	100	0	Cold Mill and Overlay	10/1/17
OLIVE	17400	OLIVE AVE	PINE DR	COURTNEY AVE	E	1	AC	2	996	32	31,872	4/12/23	81	33	67	0	Surface Treatment - Slurry Seal	7/1/12
OLIVE	17410	OLIVE AVE	CEDAR AVE	HAWTHORNE AVE	E	1	AC	2	700	32	22,400	4/18/23	27	69	15	16	Surface Treatment - Slurry Seal	7/1/12
OLIVE	17420	OLIVE AVE	LOCUST AVE	LAMBERT AVE	E	1	AC	2	790	32	25,280	4/17/25	49	60	40	0	Surface Treatment - Slurry Seal	7/1/12
OLIVE	17430	OLIVE AVE	BASQUE AVE	LEE AVE	E	1	AAC	2	270	32	8,640	4/16/22	100	0	0	0	Overlay - AC Structural	4/16/22
OLIVE	17435	OLIVE AVE	LEE AVE	ORANGE AVE	E	1	AAC	2	520	32	16,640	4/16/22	100	0	0	0	Overlay - AC Structural	4/16/22
OLIVER	17440	OLIVER DR	VALLEY VIEW DR	FERN DR	E	2	AC	2	260	28	7,280	5/8/25	92	67	33	0	Surface Treatment - Slurry Seal	6/11/24
ORANGE	17450	ORANGE AVE	CHAPMAN AVE	COMMONWEALTH AVE	E	7	AC	2	1,345	32	49,440	8/3/23	21	78	4	18	Complete Reconstruction - AC	5/25/20
ORANGE	17455	ORANGE AVE	COMMONWEALTH AVE	WILLIAMSON WY	E	7	AC	2	320	32	10,240	4/1/25	19	75	10	15	New Construction - Initial	1/1/80
ORANGE	17460	ORANGE AVE	ASH AVE	OLIVE AVE	E	1	AC	2	490	32	15,680	3/19/25	35	70	27	3	Surface Treatment - Slurry Seal	7/1/12
ORANGE	17470	ORANGE AVE	WOODCREST AVE	BAKER AVE	E	1	AC	2	510	32	16,320	4/17/23	91	0	48	52	Surface Treatment - Slurry Seal	7/1/12
ORANGE	17475	ORANGE AVE	BAKER AVE	HOUSTON AVE	E	1	AC	2	590	32	18,880	4/11/23	16	88	12	0	Surface Treatment - Slurry Seal	7/1/12
ORANGE	50006	ORANGE AVE	CHAPMAN AVE	END	E		AAC	0	210	32	6,720	8/29/23	99	0	100	0	New Construction - Initial	1/1/10
ORNFRA	17480	ORANGEFAIR AVE	HOUSTON AVE	HARBOR BL	E	2	AC	2	427	32	13,664	12/16/21	100	0	0	0	New Construction - Initial	1/1/80
ORNFRA	17485	ORANGEFAIR AVE	HARBOR BL	LEMON ST	E	3	AC	2	1,250	38	47,500	12/15/21	94	51	32	17	New Construction - Initial	1/1/80
ORANFRON	50100	ORANGETHROPE (FRONTAGE)	ORCHARD AVE	CITRUS AVE	E	1	AC	2	680	26	17,680	4/17/23	21	89	11	0	New Construction - AC	1/1/80
ORANFRON	60000	ORANGETHROPE (FRONTAGE)	JEFFERSON AVE	RICHMAN AVE	E	2	AAC	2	1,912	30	38,240	12/1/23	92	0	100	0	Overlay - AC Structural	5/25/20
ORANFRON	9900	ORANGETHROPE (FRONTAGE)	PACIFIC DR	END	E	1	AC	2	1,834	32	58,688	4/17/23	28	91	7	2	New Construction - AC	1/1/80
ORANFRON	9905	ORANGETHROPE (FRONTAGE)	BASQUE AVE	ORCHARD AVE	E	1	AC	2	895	26	23,270	4/17/23	82	20	80	0	New Construction - AC	1/1/80
ORANFRON	9915	ORANGETHROPE (FRONTAGE)	END w/o COURTNEY AVE	END e/o CEDAR AVE	E	1	AC	2	1,034	32	33,088	12/1/23	28	55	26	19	New Construction - AC	1/1/80
ORANFRON	9920	ORANGETHROPE (FRONTAGE)	GILBERT ST	END	E	1	AC	2	1,681	30	50,430	4/12/23	19	85	13	2	New Construction - AC	1/1/80
ORANFRON	9930	ORANGETHROPE (FRONTAGE)	BASQUE AVE	CITRUS AVE	E	1	AC	2	1,536	32	49,152	12/1/23	27	66	33	1	New Construction - AC	1/1/80
ORANFRON	9935	ORANGETHROPE (FRONTAGE)	END	BASQUE AVE	E	1	AC	2	2,209	26	57,434	12/1/23	39	42	57	1	New Construction - AC	1/1/80
ORANFRON	9940	ORANGETHROPE (FRONTAGE)	ORANGETHROPE AVE	WASHINTON AVE	E	2	AC	2	446	26	12,333	12/1/23	67	54	39	7	New Construction - AC	1/1/80
ORANFRON	9942	ORANGETHROPE (FRONTAGE)	WASHINTON AVE	WOODS AVE	E	2	AC	2	265	26	6,890	12/1/23	36	76	22	2	New Construction - AC	1/1/80
ORANFRON	9945	ORANGETHROPE (FRONTAGE)	WOODS AVE	RAY AVE	E	2	AC	2	2,029	32	64,928	4/8/24	51	58	32	10	New Construction - AC	1/1/80
ORCHRD	17500	ORCHARD AVE	COMMONWEALTH AVE	SOUTH END	E	7	AC	2	260	32	8,320	4/1/25	65	0	25	75	New Construction - Initial	1/1/80
ORCHRD	17512	ORCHARD AVE	COMMONWEALTH AVE	CHAPMAN AVE	E	7	AC	2	690	32	22,080	12/22/21	29	71	27	2	New Construction - Initial	1/1/80
ORCHRD	17515	ORCHARD AVE	CHAPMAN AVE	NORTH END	E	7	AC	2	245	32	7,840	1/1/80	100	0	0	0	New Construction - Initial	1/1/80
ORCHRD	17520	ORCHARD AVE	ELM AVE	OLIVE AVE	E	1	AC	2	245	32	7,840	3/19/25	33	59	33	8	New Construction - Initial	1/1/80
ORCHRD	17530	ORCHARD AVE	HILL AVE	ORANGETHORPE AVE	E	1	AC	2	560	32	17,920	3/18/25	29	87	13	0	Surface Treatment - Slurry Seal	7/1/12
ORCHRD	17535	ORCHARD AVE	ORANGETHORPE AVE	WOODCREST AVE	E	1	AC	2	235	32	7,520	4/17/23	14	90	10	0	Surface Treatment - Slurry Seal	7/1/12
ORCHRD	17538	ORCHARD AVE	WOODCREST AVE	BAKER AVE	E	1	AC	2	510	32	16,320	4/17/23	40	56	44	0	Surface Treatment - Slurry Seal	7/1/12
ORCHRD	17539	ORCHARD AVE	BAKER AVE	HOUSTON AVE	E	1	AC	2	750	32	24,000	4/11/23	29	83	17	0	Surface Treatment - Slurry Seal	7/1/12
ORCRDP	17540	ORCHARD PL	END	ASH AVE	E	1	AC	2	255	32	8,160	3/19/25	49	48	52	0	New Construction - Initial	1/1/80
OVRLKR	17550	OVERLOOK RD	N END	PANORAMA RD	E	5	AC	2	215	32	6,880	1/6/21	24	58	42	0	New Construction - Initial	1/1/80
OVRLKR	17560	OVERLOOK RD	PANORAMA RD	S END	E	5	AC	2	730	32	23,360	12/22/20	29	88	11	1	New Construction - Initial	1/1/80
OXFORD	17570	OXFORD AVE	END	YORBA LINDA BLVD	E	4	AC	2	500	37	18,500	4/21/25	82	0	100	0	New Construction - Initial	1/1/80
PACFIC	17580	PACIFIC DR	WALNUT AVE	VALENCIA DR	E	7	AAC	2	520	32	16,640	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
PACFIC	17590	PACIFIC DR	WEST AVE	OAK AVE	E	1	AC	2	490	32	15,680	3/25/25	10	83	3	14	Surface Treatment - Slurry Seal	7/1/12
PACFIC	17593	PACIFIC DR	OAK AVE	OLIVE AVE	E	1	AC	2	700	32	22,400	3/25/25	43	59	28	13	Surface Treatment - Slurry Seal	7/1/12
PACFIC	17596	PACIFIC DR	OLIVE AVE	HILL AVE	E	1	AC	2	490	32	15,680	3/25/25	9	90	3	7	Surface Treatment - Slurry Seal	7/1/12
PACFIC	17600	PACIFIC DR	HILL AVE	ORANGETHORPE AVE	E	1	AC	2	425	32	13,600	3/25/25	27	59	14	27	Surface Treatment - Slurry Seal	7/1/12
PACFIC	17602	PACIFIC DR	ORANGETHORPE AVE	GAGE AVE	E	1	AC	2	605	32	19,360	4/17/23	15	66	3	31	Surface Treatment - Slurry Seal	7/1/12
PACFIC	17604	PACIFIC DR	GAGE AVE	ROBERTA AVE	E	1	AC	2	470	32	15,040	4/17/23	58	71	26	3	Surface Treatment - Slurry Seal	7/1/12
PACFIC	17606	PACIFIC DR	ROBERTA AVE	HOUSTON AVE	E	1	AC	2	465	32	14,880	4/11/23	86	17	59	24	New Construction - Initial	1/1/80
PAGEAV	17610	PAGE AVE	ROBERTA AVE	BROOKHURST RD	E	1	AC	2	1,362	32	26,880	4/17/23	44	55	45	0	Surface Treatment - Slurry Seal	7/1/12
PALISD	17620	PALISADES DR	PANORAMA RD	SMOKEWOOD AVE	E	5	AC	2	1,285	32	41,120	12/15/20	23	82	14	4	New Construction - Initial	1/1/80
PALMDR	17630	PALM DR	PLACENTIA AVE	COLLINS WAY	E	4	AC	2	1,405	32	44,960	1/13/21	64	33	65	2	New Construction - Initial	1/1/80
PALMDR	17640	PALM DR	COLLINS WAY	BRADFORD AVE	E	4	AC	2	1,075	32	34,400	1/13/21	67	9	68	23	New Construction - Initial	1/1/80
PALMST	17665	PALM ST	IMPERIAL HWY	XIMENO DR	E	6	AC	2	245	36	8,820	4/18/25	99	0	100	0	New Construction - Initial	1/1/80
PALOMA	17670	PALOMA PL	END	LAGUNA RD	E	6	AC	2	540	32	17,280	1/6/21	39	56	25	19	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
PANORM	17680	PANORAMA RD	BREA BLVD	END	E	5	AC	2	2,215	32	70,880	12/15/20	18	80	13	7	New Construction - Initial	1/1/80
PARKVW	17710	PARK VIEW DR	END	MARION BLVD	E	5	AAC	2	450	32	14,400	10/29/24	100	0	0	0	Overlay - AC Structural	10/29/24
PARKSR	17690	PARKS RD	CASTLEWOOD DR	AVENIDA DEL NORTE	E	8	AC	2	1,485	32	47,520	4/11/25	39	51	33	16	New Construction - Initial	1/1/80
PARKSR	17700	PARKS RD	AVENIDA DEL NORTE	ROSECRANS AVE	E	8	AC	2	1,155	60	69,300	4/11/25	47	39	48	13	New Construction - Initial	1/1/80
PASDOR	17720	PASEO DORADO	DOMINGO RD	CAMINO LA VISTA	E	8	AC	2	805	32	25,760	4/18/25	26	54	37	9	New Construction - Initial	1/1/80
PASDOR	17725	PASEO DORADO	CAMINO LA VISTA	EUCLID AVE	E	8	AC	2	1,515	32	48,480	4/3/26	100	0	0	0	Complete Reconstruction - AC	4/3/26
PASDOR	17730	PASEO DORADO	EUCLID AVE	VERONA DR	E	6	AC	2	190	32	6,080	12/30/20	19	80	20	0	New Construction - Initial	1/1/80
PASGRN	17740	PASEO GRANDE	GRISSOM PARK DR	MANZANITA DR	E	8	AC	2	870	32	27,840	4/22/25	31	47	44	9	New Construction - Initial	1/1/80
PASGRN	17745	PASEO GRANDE	MANZANITA DR	E END	E	8	AC	2	240	32	7,680	4/22/25	19	61	29	10	New Construction - Initial	1/1/80
PASEOP	17750	PASEO PL	TETON DR	END	E	6	AAC	2	170	32	5,440	10/5/24	100	0	0	0	Overlay - AC Structural	10/5/24
PASEOP	17760	PASEO PL	MADONNA DR	END	E	6	AAC	2	395	32	12,640	10/5/24	100	0	0	0	Overlay - AC Structural	10/5/24
PASEOP	17770	PASEO PL	END	GREENMEADOW DR	E	6	AAC	2	180	32	5,760	10/5/24	100	0	0	0	Overlay - AC Structural	10/5/24
PATRSN	17780	PATTERSON WAY	LAWRENCE AVE	END	E	3	AC	2	1,325	20	24,210	11/29/21	94	0	89	11	Cold Mill and Overlay	1/1/17
PAULAA	17790	PAULA AVE	WEST AVE	FLOWER AVE	E	1	AC	2	860	26	22,360	4/20/23	38	89	9	2	Surface Treatment - Slurry Seal	7/1/12
PAULAD	17800	PAULA DR	OLIVE AVE	END	E	1	AC	2	665	32	21,280	4/18/23	92	0	82	18	Surface Treatment - Slurry Seal	7/1/12
PEARL	17810	PEARL DR	CAMEO LN	SAPPHIRE RD	E	4	AC	2	990	37	36,630	12/3/20	82	0	100	0	Surface Treatment - Slurry Seal	5/25/20
PEARSN	17820	PEARSON AVE	SAN CARLOS AVE	DEREK DR	E	4	AAC	2	1,370	32	43,840	9/15/24	100	0	0	0	Overlay - AC Structural	9/15/24
PECKHM	17830	PECKHAM ST	ORANGETHORPE AVE	END	E	1	AAC	2	910	32	29,120	4/17/23	88	0	95	5	Overlay - AC Structural	4/16/22
PEPRTR	17840	PEPPERTREE LN	VALENCIA MESA DR	END	E	7	AAC	2	235	26	6,110	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
PICDLY	17850	PICADILLY WAY	CDS	PVMT CHNGE 250' S/ END	E	1	AC	2	252	38	11,520	3/25/25	98	99	1	0	Surface Treatment - Slurry Seal	10/5/22
PICDLY	17851	PICADILLY WAY	PVMT CHNGE 250' S/ END	SOUTHERN CITY LIMIT	E	1	AC	2	310	35	10,735	3/25/25	99	0	100	0	Surface Treatment - Slurry Seal	10/5/22
PICOST	17860	PICO ST	END	CARHART AVE	E	7	AC	2	550	26	14,300	4/25/23	74	42	57	1	New Construction - Initial	1/1/80
PINATA	17870	PINATA PL	END	MORELIA AVE	E	6	AAC	2	230	32	7,360	8/4/23	100	0	0	0	Overlay - AC Structural	8/4/23
PINEDR	17880	PINE DR	WALNUT AVE	VALENCIA DR	E	7	AC	2	480	32	15,360	4/12/23	70	17	83	0	New Construction - Initial	1/1/80
PINEDR	17885	PINE DR	VALENCIA DR	ASH AVE	E	1	AC	2	555	32	17,760	4/18/23	72	68	32	0	Surface Treatment - Slurry Seal	7/1/12
PINEDR	17890	PINE DR	OAK AVE	OLIVE AVE	E	1	AC	2	708	32	23,956	3/25/25	30	60	12	28	Surface Treatment - Slurry Seal	7/1/12
PINEDR	17892	PINE DR	OLIVE AVE	PORTER AVE	E	1	AC	2	765	32	24,480	4/12/23	22	86	14	0	Surface Treatment - Slurry Seal	7/1/12
PINEDR	17894	PINE DR	PORTER AVE	ORANGETHORPE AVE (FRONTAGE)	E	1	AC	2	230	32	7,360	4/12/23	20	86	13	1	Surface Treatment - Slurry Seal	7/1/12
PINEDR	17900	PINE DR	HOUSTON AVE	ROBERTA AVE	E	1	AC	2	360	32	12,320	4/12/23	51	71	16	13	Surface Treatment - Slurry Seal	7/1/12
PINEDR	17902	PINE DR	ROBERTA AVE	NORTH END	E	1	AC	2	150	32	4,800	4/12/23	52	59	16	25	Surface Treatment - Slurry Seal	7/1/12
PINRDG	17910	PINE RIDGE KNOLL	LA CRESTA PL	END	E	7	AC	2	641	28	17,948	4/9/25	11	64	27	9	New Construction - Initial	1/1/80
PINCRT	17920	PINECREST CT	END	HOLLYOAK DR	E	5	AC	2	200	26	5,200	4/22/25	92	0	69	31	New Construction - Initial	1/1/80
PINCRT	17930	PINECREST CT	END	MOUNTAIN RIDGE DR	E	4	AC	2	225	26	5,850	4/21/25	85	0	66	34	New Construction - Initial	1/1/80
PINTAL	17940	PINTAIL DR	SPARROW DR	ROLING HILLS DR	E	4	AC	2	165	36	5,940	2/27/25	85	0	85	15	Surface Treatment - Slurry Seal	5/25/20
PIONEA	17950	PIONEER AVE	BURNING TREE RD	SUNNY RIDGE DR	E	8	AC	2	1,279	32	9,760	4/17/25	20	62	36	2	New Construction - Initial	1/1/80
PIONEA	17960	PIONEER AVE	SUNNY RIDGE DR	AVENIDA SELVA	E	8	AC	2	1,100	32	35,200	4/17/25	38	54	40	6	New Construction - Initial	1/1/80
PIONEA	17965	PIONEER AVE	AVENIDA SELVA	GILBERT ST	E	8	AC	3	465	32	9,760	4/17/25	82	0	44	56	New Construction - Initial	1/1/80
PIONEA	17968	PIONEER AVE	LADERA VISTA DR	YORBA LINDA BL	E	5	AC	2	1,606	32	51,392	12/22/20	28	65	23	12	New Construction - Initial	1/1/80
POMONA	17970	POMONA AVE	UNION AVE	CHAPMAN AVE	E	3	AC	2	1,250	36	45,000	12/3/21	94	0	100	0	New Construction - Initial	1/1/80
POMONA	17975	POMONA AVE	CHAPMAN AVE	COMMONWEALTH AVE	E	3	AC	2	1,252	52	65,104	12/3/21	95	0	100	0	New Construction - Initial	1/1/80
POMONA	17980	POMONA AVE	COMMONWEALTH AVE	END	E	3	AC	2	440	32	14,080	12/3/21	95	0	100	0	New Construction - Initial	1/1/80
POMONA	17990	POMONA AVE	TRUSLOW AVE	END	E	3	AC	2	1,497	32	47,904	11/22/21	77	41	59	0	New Construction - Initial	1/1/80
POMONA	17995	POMONA AVE	ORANGEFAIR AVE	S END	E	3	AAC	2	660	32	21,120	3/1/23	100	0	0	0	Overlay - AC Structural	3/1/23
PONDRS	18000	PONDEROSA AVE	ROLLING HILLS DR	EVERGREEN AVE	E	5	AC	2	821	32	26,272	4/22/25	87	0	100	0	Cold Mill and Overlay	8/1/18
PONDRS	18005	PONDEROSA AVE	EVERGREEN AVE	LARK ELLEN DR	E	5	AC	2	1,637	32	52,384	5/14/25	84	71	29	0	New Construction - Initial	1/1/80
PORTER	18010	PORTER AVE	HASTINGS AVE	MEADE AVE	E	1	AC	2	960	32	30,720	4/27/23	94	0	93	7	Surface Treatment - Slurry Seal	10/1/22
PORTER	18020	PORTER AVE	MAGNOLIA AVE	VINE AVE	E	1	AC	2	325	32	10,400	4/18/23	92	0	87	13	Surface Treatment - Slurry Seal	7/1/12
PORTER	18025	PORTER AVE	VINE AVE	END	E	1	AC	2	565	26	14,690	4/18/23	91	0	89	11	Surface Treatment - Slurry Seal	7/1/12
PORTER	18030	PORTER AVE	GILBERT ST	COURTNEY AVE	E	1	AC	2	1,290	32	41,280	4/12/23	44	76	21	3	Surface Treatment - Slurry Seal	7/1/12
PORTER	18040	PORTER AVE	LEE AVE	END	E	1	AC	2	1,280	32	40,960	4/21/25	27	52	43	5	Surface Treatment - Slurry Seal	7/1/12
PORTER	18050	PORTER AVE	ORCHARD AVE	CITRUS AVE	E	1	AC	2	540	32	17,280	3/18/25	39	87	13	0	Surface Treatment - Slurry Seal	7/1/12
PORTER	18051	PORTER AVE	CITRUS AVE	END	E	5	AC	2	360	32	11,520	3/18/25	93	0	83	17	Surface Treatment - Slurry Seal	7/1/12
PORTER	18060	PORTER AVE	ADAMS AVE	WASHINGTON AVE	E	2	AC	2	360	32	11,520	12/1/21	62	77	23	0	Surface Treatment - Slurry Seal	7/1/12
PORTER	18070	PORTER AVE	WOODS AVE	HIGHLAND AVE	E	2	AC	2	2,435	32	77,920	11/29/21	29	73	18	9	New Construction - Initial	1/1/80
POSTRD	18080	POST RD	GREENHILL RD	TARRYTOWN DR	E	8	AC	2	790	32	25,280	4/17/25	31	54	40	6	New Construction - Initial	1/1/80
POSTRD	18090	POST RD	TRIESTE WAY	LARKWOOD DR	E	8	AC	2	815	32	26,080	4/17/25	22	60	27	13	New Construction - Initial	1/1/80
POSTRD	18095	POST RD	LARKWOOD DR	SUNNY RIDGE DR	E	8	AC	2	135	32	4,320	4/17/25	26	73	12	15	New Construction - Initial	1/1/80
POTRRO	18100	POTRERO DR	LAS RIENDAS DR	LAS PALMAS DR	E	6	AC	2	695	32	22,240	12/30/20	24	83	17	0	New Construction - Initial	1/1/80
PRNCTN	18110	PRINCETON AVE	FERN DR	GLENWOOD AVE	E	3	AC	2	360	32	11,520	11/17/21	38	51	36	13	New Construction - Initial	1/1/80
PRNCTN	18112	PRINCETON AVE	GLENWOOD AVE	PRINCETON CIR	E	3	AC	2	230	32	7,360	11/17/21	75	33	67	0	New Construction - Initial	1/1/80
PRNCTN	18114	PRINCETON AVE	PRINCETON CIR	CHAPMAN AVE	E	3	AC	2	240	32	7,680	5/8/25	95	0	100	0	New Construction - Initial	1/1/80
PRNCTN	18116	PRINCETON AVE	CHAPMAN AVE	COMMONWEALTH AVE	E	3	AC	2	1,253	32	40,096	11/19/21	36	22	77	1	New Construction - Initial	1/1/80
PRNCTN	18120	PRINCETON AVE	SANTA FE AVE	WALNUT AVE	E	3	AC	2	270	32	8,640	11/19/21	9	89	11	0	New Construction - Initial	1/1/80
PRNTNE	18150	PRINCETON CIR EAST	PRINCETON AVE	PRINCETON AVE	E	3	AC	2	1,430	26	37,180	5/8/25	99	0	100	0	New Construction - Initial	1/1/80
PRNTNW	18130	PRINCETON CIR WEST	PRINCETON AVE	PRINCETON AVE	E	3	AC	2	1,430	26	37,180	5/8/25	100	0	100	0	New Construction - Initial	1/1/80
PRTCRD	18170	PRITCHARD AVE	END	COMMONWEALTH AVE	E	7	AC	2	1,000	32	32,000	4/25/23	33	68	22	10	New Construction - Initial	1/1/80
PRTCRD	18180	PRITCHARD AVE	COMMONWEALTH AVE	END	E	7	AC	2	540	32	17,280	5/9/25	99	0	100	0	Surface Treatment - Slurry Seal	6/1/24
PRTCRD	18190	PRITCHARD AVE	END	VALENCIA DR	E	7	AC	2	620	32	19,840	5/9/25	99	0	100	0	Surface Treatment - Slurry Seal	6/1/24
PRTCRD	18195	PRITCHARD AVE	VALENCIA DR	OAK AVE	E	1	AC	2	848	32	27,136	4/20/23	64	35	55	10	Surface Treatment - Slurry Seal	7/1/12
PUEBLO	18200	PUEBLO PL	TETON DR	END	E	6	AAC	2	170	32	5,440	10/5/24	100	0	0	0	Overlay - AC Structural	10/5/24
PUEBLO	18210	PUEBLO PL	MADONNA DR	END	E	6	AAC	2	410	32	13,120	10/5/24	100	0	0	0	Overlay - AC Structural	10/5/24
PUEBLO	18220	PUEBLO PL	END	GREENMEADOW DR	E	6	AAC	2	185	32	5,920	10/5/24	100	0	0	0	Overlay - AC Structural	10/5/24

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
PUENTE	18230	PUENTE ST	IMPERIAL HWY	EADINGTON DR	E	6	AC	2	1,330	36	47,880	4/18/25	75	31	66	3	Surface Treatment - Slurry Seal	5/25/20
PUENTE	18240	PUENTE ST	EADINGTON DR	END	E	6	AC	2	1,570	36	56,520	12/23/20	84	0	100	0	New Construction - Initial	1/1/80
PUENTE	18250	PUENTE ST	ROSARITA DR	ROLLING HILLS DR	E	6	AC	2	1,840	37	68,080	12/15/20	14	64	10	26	New Construction - Initial	1/1/80
PUENTE	18260	PUENTE ST	ROLLING HILLS DR	BASTANCHURY RD	E	6	AAC	2	1,245	37	46,065	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
QUARTZ	18270	QUARTZ LN	PLACENTIA AVE	SAPPHIRE RD	E	4	AC	2	1,290	37	47,730	2/27/25	83	11	85	4	Surface Treatment - Slurry Seal	5/25/20
QUARTZ	50005	QUARTZ LN	BRADFORD AVE	END	E		AC	0	450	32	14,400	7/17/23	43	90	10	0	New Construction - Initial	1/1/10
RAINTR	18280	RAINTREE RD	VALENCIA MESA DR	END	E	7	AC	2	405	30	12,150	4/23/25	21	57	35	8	New Construction - Initial	1/1/80
ROMONA	18300	RAMONA DR	ARROYO DR	BUENA VISTA DR	E	7	AC	2	1,085	22	23,870	4/2/25	92	0	100	0	Complete Reconstruction - AC	11/1/16
RANCH	18310	RANCH RD	CONCORD AVE	STATE COLLEGE BLVD	E	5	AC	2	145	32	4,640	5/8/25	83	38	62	0	New Construction - Initial	1/1/80
RANCHO	18320	RANCHO CIR	TERRAZA PL	END	E	6	AC	2	2,535	32	81,120	12/3/20	18	63	4	33	New Construction - Initial	1/1/80
RANDEE	18330	RANDEE WAY	END	MAGNOLIA AVE	E	7	AC	2	555	32	17,760	5/9/25	88	27	32	41	Surface Treatment - Slurry Seal	6/1/24
RAYAVE	18340	RAY AVE	PORTER AVE	ORANGETHORPE AVE	E	2	AC	2	290	32	9,280	11/29/21	89	0	98	2	New Construction - Initial	1/1/80
RAYMER	18350	RAYMER AVE	AIRPARK DR	GILBERT ST	E	8	AC	2	735	40	29,400	4/25/23	33	51	23	26	New Construction - Initial	1/1/80
RAYMER	18360	RAYMER AVE	GILBERT ST	END	E	8	AC	2	1,635	38	62,130	4/25/23	36	46	37	17	New Construction - Initial	1/1/80
RAYMOA	18370	RAYMOND AVE	N END	SMOKEWOOD AVE	E	5	AC	2	170	32	5,440	1/6/21	38	33	67	0	New Construction - Initial	1/1/80
RAYMOA	18380	RAYMOND AVE	SMOKEWOOD AVE	S END	E	5	AC	2	40	32	1,280	6/1/18	95	0	100	0	New Construction - Initial	1/1/80
RAYMOA	18390	RAYMOND AVE	SKYLINE DR	MELODY LN	E	5	AC	2	2,095	32	67,040	4/16/25	50	54	45	1	New Construction - Initial	1/1/80
RAYMOA	18400	RAYMOND AVE	MELODY LN	GLENWOOD AVE	E	3	AC	2	1,326	36	45,230	11/17/21	63	72	27	1	New Construction - Initial	1/1/80
RAYMOA	18405	RAYMOND AVE	GLENWOOD AVE	RIVERSIDE DR	E	3	AC	2	999	32	31,968	11/17/21	66	66	32	2	New Construction - Initial	1/1/80
RAYMOA	18410	RAYMOND AVE	RIVERSIDE DR	CHAPMAN AVE	E	3	AC	2	895	30	30,760	11/17/21	61	67	32	1	New Construction - Initial	1/1/80
REDWLW	18430	RED WILLOW RD	GALLIO DR	BURING TREE RD	E	8	AC	2	705	32	22,560	3/26/25	31	66	25	9	New Construction - Initial	1/1/80
REDOND	18420	REDONDO PL	END	DOMINGO DR	E	6	AC	2	430	32	13,760	12/30/20	92	0	100	0	Surface Treatment - Slurry Seal	5/25/20
REDWOD	18440	REDWOOD CIR	ROSALIA DR	END	E	5	AC	2	175	32	5,600	6/5/26	100	0	0	0	Surface Treatment - REAS	8/28/25
REGNCY	18450	REGENCY CIR	SUNNY RIDGE DR	END	E	8	AAC	2	180	32	5,760	5/5/25	100	0	0	0	Overlay - AC Structural	5/5/25
REVERE	18460	REVERE AVE	MONTAGUE AVE	ANNIN AVE	E	3	AC	2	760	32	24,320	12/6/21	89	0	100	0	New Construction - Initial	1/1/80
REVERE	18464	REVERE AVE	ANNIN AVE	HARRINGTON DR	E	3	AC	2	525	32	48,800	12/6/21	95	0	100	0	New Construction - Initial	1/1/80
REVERE	18466	REVERE AVE	LADERA VISTA DR	W END	E	4	AC	2	250	32	8,000	5/14/25	92	0	100	0	Surface Treatment - Slurry Seal	6/8/24
REVERE	18470	REVERE AVE	CONCORD AVE	STATE COLLEGE BLVD	E	4	AC	2	415	32	13,280	5/14/25	87	51	49	0	Surface Treatment - Slurry Seal	6/1/24
RICHMN	18480	RICHMAN AVE	SUNNYCREST DR	RICHMAN KNOLL	E	7	AC	2	1,125	32	36,000	4/9/25	20	86	14	0	New Construction - Initial	1/1/80
RICHMN	18490	RICHMAN AVE	RICHMAN KNOLL	VALLEY VIEW DR	E	7	AC	2	1,660	36	59,760	4/9/25	17	86	13	1	New Construction - Initial	1/1/80
RICHMN	18500	RICHMAN AVE	VALLEY VIEW DR	UNION AVE	E	2	AC	2	1,335	32	42,720	12/2/21	70	36	64	0	New Construction - Initial	1/1/80
RICHMN	18503	RICHMAN AVE	UNION AVE	MALVERN AVE	E	2	AC	2	860	32	27,520	12/2/21	89	0	100	0	New Construction - Initial	1/1/80
RICHMN	18506	RICHMAN AVE	MALVERN AVE	CHAPMAN AVE	E	2	AC	2	455	32	14,560	12/2/21	88	0	100	0	New Construction - Initial	1/1/80
RICHMN	18510	RICHMAN AVE	CHAPMAN AVE	COMMONWEALTH AVE	E	2	AC	2	1,225	32	39,200	12/2/21	87	0	100	0	New Construction - Initial	1/1/80
RICHMN	18520	RICHMAN AVE	COMMONWEALTH AVE	END	E	2	AC	2	570	32	18,240	12/2/21	86	0	100	0	Mill, Overlay w/Fabric (1.5 In)	7/1/12
RICHMN	18525	RICHMAN AVE	WALNUT AVE	ASH AVE	E	2	AC	2	1,180	32	37,760	11/29/21	94	0	100	0	Mill, Overlay w/Fabric (1.5 In)	7/1/12
RICHMN	18526	RICHMAN AVE	ASH AVE	ELM AVE	E	2	AC	2	265	32	8,480	11/29/21	82	55	45	0	New Construction - Initial	7/1/12
RICHMN	18530	RICHMAN AVE	ELM AVE	ORANGETHORPE AVE	E	2	AC	2	1,660	32	53,120	11/29/21	60	71	28	1	New Construction - Initial	1/1/80
RICHMN	18540	RICHMAN AVE	ORANGETHORPE AVE	HOUSTON AVE	E	2	AC	2	1,576	32	50,432	11/24/21	92	0	100	0	New Construction - Initial	1/1/80
RICMNK	18550	RICHMAN KNOLL	END	VALENCIA MESA DR	E	7	AC	2	2,025	37	74,925	5/8/25	90	0	87	13	Surface Treatment - REAS	8/23/24
RICMNK	18560	RICHMAN KNOLL	VALENCIA MESA DR	RICHMAN AVE	E	7	AC	2	1,640	32	52,480	4/9/25	72	0	54	46	New Construction - Initial	1/1/80
RIDGVW	18580	RIDGE VIEW TERR	SKYLINE DR	END	E	5	AC	2	354	26	11,204	1/6/21	31	80	17	3	New Construction - Initial	1/1/80
RIDGTP	18570	RIDGETOP LN	END	SKYLINE DR	E	5	AC	2	1,025	32	32,800	12/3/20	87	0	94	6	New Construction - Initial	1/1/80
RIEDEL	18590	RIEDEL AVE	ALTO LN	DOROTHY LN	E	5	AC	2	1,285	32	41,120	12/15/20	34	79	17	4	New Construction - Initial	1/1/80
RIEDEL	18600	RIEDEL AVE	DOROTHY LN	RIVERSIDE DR	E	3	AC	2	1,535	32	49,120	11/15/21	34	81	12	7	New Construction - Initial	1/1/80
RIVRSD	18610	RIVERSIDE DR	DOROTHY LN	LINDENDALE AVE	E	3	AAC	2	630	36	22,680	9/28/25	100	0	0	0	Overlay - AC Structural	9/28/25
RIVRSD	18612	RIVERSIDE DR	LINDENDALE AVE	FERNDALE AVE	E	3	AC	2	535	36	19,260	11/15/21	84	0	100	0	New Construction - Initial	1/1/80
RIVRSD	18615	RIVERSIDE DR	FERNDALE AVE	RIEDEL AVE	E	3	AC	2	860	36	30,960	11/17/21	95	0	94	6	New Construction - Initial	1/1/80
RIVRSD	18620	RIVERSIDE DR	RIEDEL AVE	RAYMOND AVE	E	3	AC	2	1,175	36	42,300	11/17/21	94	0	100	0	New Construction - Initial	1/1/80
ROBRTA	1840	ROBERTA AVE	PACIFIC DR	EADINGTON DR	E	5	AC	2	1,108	32	35,456	4/11/23	88	19	81	0	Surface Treatment - Slurry Seal	7/1/12
ROBRTA	18630	ROBERTA AVE	END	GILBERT ST	E	1	AAC	2	665	32	21,280	4/17/23	91	0	100	0	Overlay - AC Structural	4/16/22
ROBRTA	18635	ROBERTA AVE	GILBERT ST	PAGE AVE	E	1	AC	2	1,370	32	43,840	4/17/23	24	82	18	0	Surface Treatment - Slurry Seal	7/1/12
ROBRTA	18640	ROBERTA AVE	BROOKHURST RD	PACIFIC DR	E	1	AC	2	705	32	22,900	4/17/23	67	77	23	0	Surface Treatment - Slurry Seal	7/1/12
ROBRTA	18650	ROBERTA AVE	EADINGTON DR	BASQUE AVE	E	1	AC	2	965	32	30,880	4/11/23	87	42	29	29	Surface Treatment - Slurry Seal	7/1/12
ROBRTA	18655	ROBERTA AVE	BASQUE AVE	ORCHARD AVE	E	1	AC	2	915	32	29,280	4/11/23	37	73	23	4	Surface Treatment - Slurry Seal	7/1/12
ROBRTA	18660	ROBERTA AVE	ROOSEVELT AVE	LOMBARD DR	E	2	AC	2	1,705	32	54,560	11/24/21	94	0	100	0	Surface Treatment - Slurry Seal	6/1/19
ROBRTA	18670	ROBERTA AVE	END	RICHMAN AVE	E	2	AC	2	290	26	7,540	11/24/21	90	0	100	0	New Construction - Initial	1/1/80
ROBRTA	18675	ROBERTA AVE	RICHMAN AVE	MAXZIM AVE	E	2	AC	2	550	26	14,300	11/24/21	84	0	100	0	New Construction - Initial	1/1/80
ROBIN	18680	ROBIN WAY	END	MARELEN DR	E	7	AC	2	245	28	6,860	4/8/25	76	0	100	0	New Construction - Initial	1/1/80
ROCKY	18690	ROCKY RD	END	PIONEER AVE	E	5	AC	2	946	26	16,770	12/10/20	52	61	37	2	New Construction - Initial	1/1/80
RODEO	18700	RODEO RD	END	RICHMAN KNOLL	E	7	AC	2	495	32	15,840	4/9/25	24	75	16	9	New Construction - Initial	1/1/80
RODEO	18705	RODEO RD	RICHMAN KNOLL	GLENVIEW DR	E	7	AC	2	1,135	28	31,780	4/9/25	9	78	16	6	New Construction - Initial	1/1/80
RODEO	18710	RODEO RD	GLENVIEW DR	EUCLID ST	E	7	AC	2	1,200	28	33,600	4/9/25	19	76	11	13	New Construction - Initial	1/1/80
ROLLHL	18720	ROLLING HILLS DR	END	BREA BLVD	E	6	AAC	3	1,995	60	119,700	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
ROLLHL	18730	ROLLING HILLS DR	BREA BLVD	SEQUOIA AVE	E	5	AC	3	2,190	60	131,400	11/25/20	92	0	95	5	Cold Mill and Overlay	8/1/18
ROLLHL	18740	ROLLING HILLS DR	SEQUOIA AVE	MAPLE AVE	E	5	AC	3	848	60	50,880	12/10/20	80	20	80	0	Cold Mill and Overlay	8/1/18
ROLLHL	18745	ROLLING HILLS DR	MAPLE AVE	MERLIN AVE	E	5	AC	3	2,180	60	130,800	12/22/20	66	9	91	0	New Construction - Initial	1/1/80
ROLLHL	18750	ROLLING HILLS DR	MERLIN AVE	ST COLLEGE BL	E	5	AC	3	925	60	55,500	12/22/20	68	19	74	7	New Construction - Initial	1/1/80
ROLLHL	18755	ROLLING HILLS DR	ST COLLEGE BL	E END	E	5	AAC	2	450	41	18,450	3/1/23	100	0	0	0	Overlay - AC Structural	3/1/23
ROLLHL	18760	ROLLING HILLS DR	ASSOCIATED RD	HARTFORD AVE	E	4	AC	2	1,445	58	83,810	4/22/25	79	24	61	15	New Construction - Initial	1/1/80
ROLLHL	18770	ROLLING HILLS DR	HARTFORD AVE	PLACENTIA AVE	E	4	AC	2	1,775	58	102,950	4/22/25	81	32	68	0	New Construction - Initial	1/1/80
ROOSVT	18790	ROOSEVELT AVE	N END	CHAPMAN AVE	E	2	AC	2	230	26	5,980	12/20/21	24	89	11	0	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
ROOSVT	18800	ROOSEVELT AVE	CHAPMAN AVE	S END	E	2	AC	2	280	26	7,280	12/20/21	29	89	11	0	New Construction - Initial	1/1/80
ROOSVT	18810	ROOSEVELT AVE	WILSHIRE AVE	COMMONWEALTH AVE	E	2	AC	2	665	32	21,280	12/20/21	57	67	33	0	New Construction - Initial	1/1/80
ROOSVT	18820	ROOSEVELT AVE	MAPLEWOOD AVE	WEST AVE	E	2	AC	2	375	32	12,801	12/1/21	26	85	15	0	Surface Treatment - Slurry Seal	7/1/12
ROOSVT	18825	ROOSEVELT AVE	WEST AVE	END	E	2	AC	2	120	32	3,840	12/1/21	92	0	100	0	Surface Treatment - Slurry Seal	7/1/12
ROOSVT	18830	ROOSEVELT AVE	KNEPP AVE	SOUTHGATE AVE	E	2	AC	2	240	32	7,680	12/1/21	31	73	17	10	Surface Treatment - Slurry Seal	7/1/12
ROOSVT	18840	ROOSEVELT AVE	BAKER AVE	HOUSTON AVE	E	2	AC	2	775	32	24,800	11/24/21	91	0	100	0	Surface Treatment - Slurry Seal	6/1/19
ROSALI	18850	ROSALIA DR	ROLLING HILLS DR	LIVE OAK AVE	E	5	AC	2	1,595	32	51,040	5/9/25	89	0	100	0	Reconstruct Surface (AC)	7/1/13
ROSALI	18860	ROSALIA DR	N ST COLLEGE BL	LARK ELLEN DR	E	5	AC	2	1,410	32	45,120	6/5/26	86	73	27	0	Surface Treatment - REAS	8/28/25
ROSRTA	18870	ROSARITA DR	MADONNA DR	ARBOLADO DR	E	6	AC	2	845	32	27,040	11/25/20	100	0	100	0	Complete Reconstruction - AC	8/1/17
ROSRTA	18873	ROSARITA DR	TWILIGHT DR	MADONNA DR	E	6	AC	2	840	32	26,880	11/25/20	100	0	100	0	Surface Treatment - Slurry Seal	8/1/17
ROSRTA	18877	ROSARITA DR	END	TWILIGHT DR	E	6	AC	2	1,195	32	38,240	11/25/20	100	0	100	0	Complete Reconstruction - AC	8/1/17
ROSRTA	18880	ROSARITA DR	PUENTE ST	NORTHERN CITY LIMIT	E	6	AC	2	550	38	20,900	12/15/20	49	61	39	0	New Construction - Initial	1/1/80
ROSEDR	18890	ROSE DR	BUENA VISTA DR	BUENA VISTA DR	E	7	AC	2	950	32	30,400	12/22/21	95	0	100	0	Complete Reconstruction - AC	11/1/16
ROSEHG	18900	ROSEHEDGE DR	LAS RIENDAS DR	SUNNY HILLS RD	E	6	AC	2	635	32	20,320	12/23/20	31	68	28	4	New Construction - Initial	1/1/80
ROSEHG	18910	ROSEHEDGE DR	LAS PALMAS DR	HERMOSA DR	E	6	AAC	2	831	32	26,592	10/5/24	100	0	0	0	Overlay - AC Structural	10/5/24
ROSEWD	18920	ROSEWOOD AVE	END	FLOWER AVE	E	1	AC	2	225	26	5,850	4/12/23	13	96	2	2	Surface Treatment - Slurry Seal	7/1/12
ROSSLN	18940	ROSSLYNN AVE	JEFFERSON AVE	WASHINGTON AVE	E	2	AC	2	995	32	31,840	12/1/21	61	58	35	7	Surface Treatment - Slurry Seal	7/1/12
ROSSLN	18950	ROSSLYNN AVE	WOODS AVE	RICHMAN AVE	E	2	AC	2	1,165	32	37,280	11/29/21	64	77	22	1	New Construction - Initial	1/1/80
ROSSLN	18960	ROSSLYNN AVE	HIGHLAND AVE	HARBOR BLVD	E	2	AC	2	1,265	32	40,480	11/22/21	95	0	100	0	Cold Mill and Overlay	6/1/18
ROSSLN	18970	ROSSLYNN AVE	E END	W END NEAR POMONA	E	3	AC	2	641	32	20,512	11/22/21	94	0	100	0	New Construction - Initial	1/1/80
ROSSLN	18975	ROSSLYNN AVE	END	LAWRENCE AVE	E	3	AC	2	610	32	19,520	11/22/21	89	0	100	0	New Construction - Initial	1/1/80
ROSSLN	18980	ROSSLYNN AVE	LAWRENCE AVE	BALCOM AVE	E	3	AC	2	815	32	26,080	11/22/21	92	32	68	0	New Construction - Initial	1/1/80
ROSSLN	18985	ROSSLYNN AVE	ACACIA AVE	END	E	4	AC	2	920	32	29,440	3/25/25	29	68	32	0	Surface Treatment - Slurry Seal	5/25/20
ROYALE	18990	ROYALE PL	SUNNY RIDGE DR	END	E	8	AC	2	540	32	17,280	4/22/25	25	64	28	8	New Construction - Initial	1/1/80
ROYER	19000	ROYER AVE	BAKER AVE	HOUSTON AVE	E	1	AC	2	715	32	22,880	4/11/23	24	74	16	10	Surface Treatment - Slurry Seal	7/1/12
RUBYDR	19010	RUBY DR	END	PLACENTIA AVE	E	4	AAC	2	480	37	17,760	3/1/23	100	0	0	0	Overlay - AC Structural	3/1/23
RUSSLL	19020	RUSSELL AVE	CHAPMAN AVE	WILSHIRE AVE	E	7	AC	2	505	26	13,130	4/1/25	22	71	11	18	New Construction - Initial	1/1/80
RUSSLL	19030	RUSSELL AVE	END	AMERIGE AVE	E	7	AC	2	200	26	5,200	4/1/25	25	73	27	0	New Construction - Initial	1/1/80
SALEM	19040	SALEM PL	END	CLAIRMONT ST	E	4	AAC	2	440	32	14,080	11/24/20	100	0	0	0	Overlay - AC Structural	5/25/20
SALEM	19050	SALEM PL	END	MYSTIC AVE	E	4	AC	2	455	32	14,560	11/24/20	93	0	81	19	Surface Treatment - Slurry Seal	5/25/20
SALLY	19060	SALLY PL	VALENCIA DR	END	E	3	AC	2	615	38	23,370	2/17/22	9	75	25	0	New Construction - Initial	1/1/80
SANANT	19070	SAN ANTONIO AVE	LANTANA AVE	BREA BLVD	E	6	AC	2	1,175	32	37,600	4/22/25	84	53	44	3	Surface Treatment - Slurry Seal	5/25/20
SANCAR	19080	SAN CARLOS DR	N END	COMMONWEALTH AVE	E	4	AC	2	740	43	31,820	4/14/25	59	56	43	1	Surface Treatment - Slurry Seal	5/25/20
SANCAR	19083	SAN CARLOS DR	COMMONWEALTH AVE	PEARSON AVE	E	4	AAC	2	530	43	22,790	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
SANCAR	19086	SAN CARLOS DR	PEARSON AVE	S END	E	4	AAC	2	725	56	40,600	9/15/24	100	0	0	0	Overlay - AC Structural	9/15/24
SANJUD	19120	SAN JUAN DR	LAS FALDAS DR	LA ENTRADA PL	E	6	AAC	2	390	32	12,480	4/16/22	100	0	0	0	Overlay - AC Structural	4/16/22
SANJUD	19125	SAN JUAN DR	LA ENTRADA PL	S END	E	6	AAC	2	1,264	36	45,504	4/16/22	100	0	0	0	Overlay - AC Structural	4/16/22
SANJUP	19130	SAN JUAN PL	SAN JUAN DR	END	E	6	AAC	2	262	32	8,384	4/16/22	100	0	0	0	Overlay - AC Structural	4/16/22
SANMAR	19140	SAN MARCOS PL	END	CIENAGA DR	E	6	AC	2	175	32	5,600	12/10/20	39	70	30	0	New Construction - Initial	1/1/80
SANMIG	19150	SAN MIGUEL DR	END	CIENAGA DR	E	6	AC	2	245	32	7,840	12/10/20	42	66	30	4	New Construction - Initial	1/1/80
SANMIG	19160	SAN MIGUEL DR	LAS RIENDAS DR	END	E	6	AC	2	445	32	14,240	12/1/20	40	49	42	9	New Construction - Initial	1/1/80
SANPAB	19170	SAN PABLO DR	LAS RIENDAS DR	END	E	6	AC	2	400	32	12,800	12/30/20	47	70	29	1	New Construction - Initial	1/1/80
SANRAM	19180	SAN RAMON DR	MADONNA DR	END	E	6	AC	2	455	32	14,560	12/30/20	24	72	23	5	New Construction - Initial	1/1/80
SANDLW	19090	SANDALWOOD AVE	PUENTE ST	LANTANA AVE	E	6	AAC	2	800	32	25,600	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
SANDLW	19100	SANDALWOOD AVE	SEQUOIA AVE	LIME AVE	E	5	AC	2	1,320	32	42,240	11/25/20	88	0	87	13	New Construction - Initial	1/1/80
SANDLW	19110	SANDALWOOD AVE	MERLIN AVE	END	E	5	AC	2	345	32	11,040	12/4/20	35	65	34	1	New Construction - Initial	1/1/80
SNTBAR	19190	SANTA BARBARA AVE	TERRAZA PL	DOMINGO RD	E	6	AC	2	1,441	32	46,112	12/23/20	19	78	3	19	New Construction - Initial	1/1/80
SNTCLA	19200	SANTA CLARA AVE	MOODY AVE	SAN CARLOS DR	E	4	AAC	2	1,305	32	41,760	9/15/24	100	0	0	0	Overlay - AC Structural	9/15/24
SNTCLA	19205	SANTA CLARA AVE	SAN CARLOS DR	DEREK DR	E	4	AC	2	1,030	32	32,960	2/27/25	89	0	93	7	Surface Treatment - Slurry Seal	5/25/20
SNTCLP	19210	SANTA CLARA PL	END	SANTA CLARA AVE	E	4	AC	2	290	32	9,280	4/14/25	80	13	84	3	Surface Treatment - Slurry Seal	5/25/20
SNTFEA	19220	SANTA FE AVE	HIGHLAND AVE	HARBOR BLVD	E	2	AC	2	1,275	32	40,800	12/3/21	95	0	100	0	New Construction - Initial	1/1/80
SNTFEA	19230	SANTA FE AVE	HARBOR BLVD	LEMON ST	E	3	AC	2	1,280	32	40,960	12/3/21	62	81	19	0	New Construction - Initial	1/1/80
SNTFEA	19235	SANTA FE AVE	LEMON ST	LAWRENCE AVE	E	3	AC	2	600	32	19,200	11/19/21	90	0	100	0	Complete Reconstruction - AC	6/1/18
SNTFEA	19240	SANTA FE AVE	PRINCETON AVE	YALE AVE	E	3	AC	2	280	32	8,960	11/19/21	12	82	18	0	New Construction - Initial	1/1/80
SNTFEA	19250	SANTA FE AVE	END	RAYMOND AVE	E	3	AC	2	530	26	15,030	12/28/25	100	0	0	0	Complete Reconstruction - AC	12/28/25
SNTFEA	19260	SANTA FE AVE	END	MOUNTAIN VIEW PL	E	4	AC	2	125	32	4,000	4/21/25	94	0	100	0	New Construction - Initial	1/1/80
SNTFEA	19270	SANTA FE AVE	MOUNTAIN VIEW PL	END	E	4	AC	2	425	32	13,600	4/21/25	91	0	100	0	Surface Treatment - Slurry Seal	5/25/20
SNTFEA	19280	SANTA FE AVE	LILLIE AVE	STATE COLLEGE BLVD	E	4	AC	2	455	32	14,560	4/14/25	86	17	76	7	New Construction - Initial	1/1/80
SNTFEA	19290	SANTA FE AVE	SANTA CLARA AVE	DEREK DR	E	4	AC	2	1,495	32	47,840	2/27/25	49	73	10	17	New Construction - Initial	1/1/80
SNTMAR	19300	SANTA MARIA AVE	HERMOSA DR	SANTA MONICA AVE	E	6	AC	2	735	32	23,520	4/18/25	13	59	29	12	New Construction - Initial	1/1/80
SNTMON	19310	SANTA MONICA AVE	HERMOSA DR	SANTA MARIA AVE	E	6	AC	2	625	32	20,000	4/18/25	9	66	24	10	New Construction - Initial	1/1/80
SNTROS	19320	SANTA ROSA PL	LAKESIDE DR	S END	E	6	AAC	2	578	28	16,184	10/28/25	100	0	0	0	Overlay - AC Structural	10/28/25
SNTYBL	19330	SANTA YSABEL AVE	MOODY AVE	SAN CARLOS AVE	E	4	AAC	2	1,325	32	42,400	9/15/24	100	0	0	0	Overlay - AC Structural	9/15/24
SNTYBL	19340	SANTA YSABEL AVE	SAN CARLOS AVE	DEREK DR	E	4	AC	2	1,315	32	42,080	12/10/20	72	67	33	0	Surface Treatment - Slurry Seal	5/25/20
SNTIGO	19350	SANTIAGO RD	N END	BEECHWOOD AVE	E	5	AC	2	425	32	13,600	12/22/20	20	68	26	6	New Construction - Initial	1/1/80
SNTIGO	19360	SANTIAGO RD	BEECHWOOD AVE	S END	E	5	AC	2	350	32	11,200	12/22/20	16	62	17	21	New Construction - Initial	1/1/80
SPPHRE	19370	SAPPHIRE RD	YORBA LINDA BLVD	QUARTZ LN	E	4	AC	2	1,740	37	64,380	4/21/25	71	72	27	1	New Construction - Initial	1/1/80
SARAH	19380	SARAH PL	END	ARBOLADO DR	E	6	AAC	2	160	32	5,120	11/25/20	99	0	100	0	Overlay - AC Structural	8/1/17
SEQUOA	19390	SEQUOIA AVE	PONDEROSA AVE	ROLLING HILLS DR	E	5	AC	2	1,174	32	37,568	4/22/25	81	0	100	0	Complete Reconstruction - AC	8/1/18
SEQUOA	19395	SEQUOIA AVE	ROLLING HILLS DR	SANDALWOOD AVE	E	5	AC	2	1,264	32	40,448	11/25/20	95	0	100	0	New Construction - Initial	1/1/80
SERRNO	19400	SERRANO PL	AVANIDA SAN LORENZO	ROSECRANS AVE	E	8	AAC	2	810	32	25,920	4/11/25	94	0	88	12	Overlay - AC Structural	4/1/23
SHADOW	19410	SHADOW LN	N END	SHEPPARD DR	E	5	AAC	2	650	32	20,800	1/29/24	100	0	0	0	Surface Reconstruction - AC	1/29/24

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
SHADOW	19420	SHADOW LN	SHEPPARD DR	S END	E	5	AAC	2	530	32	16,960	1/29/24	100	0	0	0	Surface Reconstruction - AC	1/29/24
SHADOW	19430	SHADOW LN	END	LEMON ST	E	5	AC	2	565	32	18,080	12/15/20	29	70	15	15	New Construction - Initial	1/1/80
SHAWN	19440	SHAWN LN	AMHERST AVE	DEREK DR	E	4	AC	2	410	32	13,120	11/24/20	90	0	100	0	New Construction - Initial	1/1/80
SHEFLD	19450	SHEFFIELD PL	DEERPARK DR	END	E	4	AC	2	545	32	9,440	2/27/25	14	80	7	13	New Construction - Initial	1/1/80
SHEFLD	19455	SHEFFIELD PL	W END	BEACON ST	E	4	AC	2	271	32	8,672	11/24/20	85	0	100	0	Surface Treatment - Slurry Seal	5/25/20
SHEPRD	19458	SHEPPARD DR	SHADOW LN	SKYLINE DR	E	5	AAC	2	195	32	6,240	1/29/24	100	0	0	0	Surface Reconstruction - AC	1/29/24
SHEPRD	19460	SHEPPARD DR	N END	VIRGINIA RD	E	5	AC	2	540	32	17,280	1/6/21	38	80	17	3	New Construction - Initial	1/1/80
SHEPRD	19463	SHEPPARD DR	VIRGINIA RD	CANNON LN	E	5	AC	2	1,218	32	38,976	12/3/20	18	91	8	1	New Construction - Initial	1/1/80
SHEPRD	19466	SHEPPARD DR	CANNON LN	DOROTHY LN	E	3	AC	2	510	32	16,320	11/17/21	51	58	40	2	New Construction - Initial	1/1/80
SHERWD	19470	SHERWOOD AVE	AMHERST AVE	DEREK DR	E	4	AC	2	680	32	21,760	11/24/20	87	0	100	0	New Construction - Initial	1/1/80
SHERWD	19480	SHERWOOD AVE	DEERPARK DR	EASTERN CITY LIMIT	E	4	AC	2	930	32	29,760	6/5/26	100	0	0	0	Surface Treatment - REAS	8/28/25
SIRVST	19500	SIERRA VISTA DR	END	FERN DR	E	2	AC	2	275	32	8,800	5/8/25	66	66	6	28	Surface Treatment - Slurry Seal	6/1/24
SIMIPL	19510	SIMI PL	END	BAKER AVE	E	1	AC	2	160	32	5,120	4/12/23	26	89	11	0	Surface Treatment - Slurry Seal	7/1/12
SKINNR	19520	SKINNER PL	END	LAS RIENDAS DR	E	6	AC	2	250	32	8,000	1/7/21	48	49	51	0	New Construction - Initial	1/1/80
SKYCRT	19530	SKYCREST DR	SKYLINE WAY	END	E	5	AC	2	525	26	13,650	1/6/21	30	78	13	9	New Construction - Initial	1/1/80
SKYLND	19540	SKYLINE DR	VIRGINIA RD	LUANNE AVE	E	5	AC	2	885	26	23,010	4/15/25	68	33	57	10	New Construction - Initial	1/1/80
SKYLND	19545	SKYLINE DR	LUANNE AVE	LONGVIEW DR	E	5	AC	2	990	32	31,680	4/15/25	70	59	41	0	New Construction - Initial	1/1/80
SKYLND	19550	SKYLINE DR	LONGVIEW DR	RIDGE VIEW TERR	E	5	AC	2	975	32	31,200	4/15/25	53	56	40	4	New Construction - Initial	1/1/80
SKYLND	19560	SKYLINE DR	RIDGE VIEW TERR	RAYMOND AVE	E	5	AC	2	1,705	32	54,560	1/13/21	47	53	38	9	New Construction - Initial	1/1/80
SKYLND	19570	SKYLINE DR	RAYMOND AVE	MIRAMAR DR	E	5	AC	2	1,712	26	44,512	4/16/25	48	61	38	1	New Construction - Initial	1/1/80
SKYLND	19580	SKYLINE DR	MIRAMAR DR	SORRENTO PL	E	5	AC	2	890	26	23,140	12/3/20	68	74	26	0	New Construction - Initial	1/1/80
SKYLND	19585	SKYLINE DR	SORRENTO PL	ACACIA AVE	E	5	AC	2	1,205	32	38,560	4/16/25	70	38	47	15	New Construction - Initial	1/1/80
SKYLNW	19590	SKYLINE WAY	SKYLINE DR	END	E	5	AC	2	1,140	26	29,640	4/15/25	29	70	24	6	New Construction - Initial	1/1/80
SMKWDA	19600	SMOKEWOOD AVE	E END	PANORAMA RD	E	5	AC	2	2,110	32	67,520	12/15/20	14	83	11	6	New Construction - Initial	1/1/80
SMKWDA	19610	SMOKEWOOD AVE	PANORAMA RD	S END	E	5	AC	2	975	32	31,200	12/15/20	28	52	48	0	New Construction - Initial	1/1/80
SORNTO	19620	SORRENTO PL	SKYLINE DR	END	E	5	AC	2	250	32	8,000	12/3/20	15	89	9	2	New Construction - Initial	1/1/80
SOGATE	19630	SOUTHGATE AVE	CEDAR AVE	BROOKHURST AVE	E	1	AC	2	1,060	32	33,920	4/18/23	37	73	21	6	Surface Treatment - Slurry Seal	7/1/12
SOGATE	19635	SOUTHGATE AVE	BROOKHURST AVE	PACIFIC DR	E	1	AC	2	1,145	32	36,640	3/25/25	82	0	100	0	Surface Treatment - Slurry Seal	7/1/12
SOGATE	19640	SOUTHGATE AVE	PACIFIC DR	BASQUE AVE	E	1	AC	2	1,010	32	32,320	4/21/25	84	30	61	9	Surface Treatment - Slurry Seal	7/1/12
SOGATE	19650	SOUTHGATE AVE	BASQUE AVE	LEE AVE	E	1	AC	2	710	32	22,720	3/19/25	9	96	3	1	Surface Treatment - Slurry Seal	7/1/12
SOGATE	19653	SOUTHGATE AVE	EUCLID AVE	JEFFERSON AVE	E	2	AC	2	495	32	15,840	12/1/21	38	74	23	3	New Construction - Initial	1/1/80
SOGATE	19656	SOUTHGATE AVE	ADAMS AVE	END	E	2	AC	2	125	32	4,000	12/1/21	73	64	36	0	Surface Treatment - Slurry Seal	7/1/12
SOGATE	19660	SOUTHGATE AVE	WOODS AVE	RICHMAN AVE	E	2	AC	2	1,165	32	37,280	11/29/21	48	75	25	0	New Construction - Initial	1/1/80
SOGATE	19670	SOUTHGATE AVE	RICHMAN AVE	HIGHLAND AVE	E	2	AC	2	1,280	32	40,960	11/29/21	77	73	27	0	New Construction - Initial	1/1/80
SOGATE	19680	SOUTHGATE AVE	MALDEN AVE	PCC	E	2	AAC	2	193	32	6,176	3/1/23	100	0	0	0	Overlay - AC Structural	3/1/23
SOGATE	19685	SOUTHGATE AVE	AC	HARBOR BLVD	E	2	PCC	2	394	32	12,608	11/24/21	100	0	0	0	New Construction - PCC	1/1/80
SPARRW	19690	SPARROW DR	END	PINTAIL DR	E	4	AC	2	710	32	22,720	2/27/25	81	0	100	0	Surface Treatment - Slurry Seal	5/25/20
SPARRW	19700	SPARROW DR	PINTAIL DR	END	E	4	AC	2	505	32	16,160	2/27/25	86	0	100	0	Surface Treatment - Slurry Seal	5/25/20
SPRUCE	19710	SPRUCE PL	END	EVERGREEN AVE	E	5	AC	2	375	32	12,000	12/4/20	100	0	0	0	Complete Reconstruction - AC	8/1/18
SPRUCE	19720	SPRUCE PL	EL MIRARDOR DR	END	E	5	AC	2	245	32	7,840	4/22/25	82	0	71	29	Cold Mill and Overlay	8/1/18
SPRUCE	19730	SPRUCE PL	END	BEECHWOOD AVE	E	5	AC	2	390	32	12,480	11/25/20	79	0	35	65	New Construction - Initial	1/1/80
STANFD	19740	STANFORD AVE	VIRGINIA RD	DOROTHY LN	E	5	AC	2	855	32	27,360	4/16/25	60	47	53	0	New Construction - Initial	1/1/80
STANFD	19745	STANFORD AVE	DOROTHY LN	GLENWOOD AVE	E	3	AC	2	690	32	22,080	8/1/22	100	0	0	0	Complete Reconstruction - AC	8/1/22
STANFD	19750	STANFORD AVE	END	COLLEGE PL	E	3	AC	2	460	32	14,720	11/17/21	90	0	41	59	New Construction - Initial	1/1/80
STANFD	19760	STANFORD AVE	CHAPMAN AVE	WILSHIRE AVE	E	3	AC	2	535	32	17,120	11/19/21	30	0	97	3	New Construction - Initial	1/1/80
STANFD	19770	STANFORD AVE	END	COMMONWEALTH AVE	E	3	AC	2	290	32	9,280	12/6/21	94	0	100	0	New Construction - Initial	1/1/80
STARBUCKST	22009	STARBUCK ST	HUGHES DR	HETEBRINK ST	E		AC	0	850	50	42,200	4/18/22	100	0	0	0	New Construction - Initial	4/18/22
STARBUCKST	22010	STARBUCK ST	HETEBRINK ST	NORTHAM DR	E		AC	0	850	50	42,200	4/18/22	100	0	0	0	New Construction - Initial	4/18/22
STARBUCKST	22011	STARBUCK ST	NORTHAM DR	PIONEER AVE	E		AC	0	600	50	30,000	4/18/22	100	0	0	0	New Construction - Initial	4/18/22
STARLG	19800	STARLING DR	LONGSPUR DR	PLACENTIA AVE	E	4	AC	2	145	44	6,380	2/27/25	87	31	69	0	Surface Treatment - Slurry Seal	5/25/20
STATEFRONT	4240	STATE COLLEGE BLVD (FRONTAGE)	ALLEY n/o CLARKE AVE	BALFOUR AVE	E	4	AC	2	485	26	12,610	2/27/25	58	34	37	29	New Construction - Initial	1/1/86
STEPNS	19810	STEPHENS AVE	FERN DR	JOHNSON PL	E	7	AC	2	1,330	28	37,240	12/23/21	89	0	33	67	New Construction - Initial	1/1/80
STEPNS	19815	STEPHENS AVE	JOHNSON PL	MALVERN AVE	E	7	AAC	2	270	28	7,560	4/2/25	100	0	0	0	Overlay - AC Structural	3/1/24
SUDENE	19816	SUDENE AVE	END	RAYMOND AVE	E	3	AC	2	505	26	13,130	12/28/25	100	0	0	0	Complete Reconstruction - AC	12/28/25
SUDENE	19820	SUDENE AVE	RAYMOND AVE	JANET PL	E	3	AC	2	1,025	32	32,800	5/14/25	100	0	0	0	Surface Treatment - Slurry Seal	6/8/24
SUDENE	19830	SUDENE AVE	JANET PL	HARRINGTON DR	E	3	AC	2	1,290	32	41,280	5/14/25	97	0	100	0	Surface Treatment - Slurry Seal	6/1/24
SUDENE	19840	SUDENE AVE	MOUNTAIN VIEW PL	END	E	4	AC	2	405	32	12,960	4/21/25	91	0	100	0	Surface Treatment - Slurry Seal	5/25/20
SUMMIT	19850	SUMMIT CIR	LOMA ALTA DR	END	E	8	AC	2	195	32	6,240	4/11/25	96	0	100	0	Complete Reconstruction - AC	10/1/20
SUNHLS	19890	SUNNY HILLS RD	LAKEVIEW DR	E END	E	6	AC	2	380	32	12,160	5/9/25	95	0	0	100	Surface Treatment - Cape Seal	12/8/24
SUNHLS	19895	SUNNY HILLS RD	W END	GLENMEADOW DR	E	6	AC	2	2,045	32	65,440	1/15/21	26	61	30	9	New Construction - Initial	1/1/80
SUNKNL	19900	SUNNY KNOLL	SUNNYCREST DR	END	E	7	AC	2	530	32	16,960	4/8/25	84	0	50	50	New Construction - Initial	1/1/80
SUNRDG	19910	SUNNY RIDGE DR	ROSECRANS AVE	LOCKLIN WAY	E	8	AC	2	1,312	36	47,232	4/22/25	33	56	34	10	New Construction - Initial	1/1/80
SUNRDG	19920	SUNNY RIDGE DR	LOCKLIN WAY	PIONEER AVE	E	8	AC	2	1,523	32	48,736	4/22/25	33	52	48	0	New Construction - Initial	1/1/80
SUNRDG	19930	SUNNY RIDGE DR	PIONEER AVE	CARMEL CIR	E	8	AC	2	1,870	32	59,840	4/17/25	51	44	46	10	New Construction - Initial	1/1/80
SUNRDG	19940	SUNNY RIDGE DR	CARMEL CIR	MALVERN AVE	E	8	AC	2	1,360	48	65,280	4/17/25	40	56	35	9	New Construction - Initial	1/1/80
SUNYWD	19950	SUNNY WOOD DR	END	EL ADOBE PL	E	6	AC	2	850	32	27,200	5/9/25	67	85	11	4	Surface Treatment - Slurry Seal	6/1/24
SUNYWD	19955	SUNNY WOOD DR	EL ADOBE PL	LAS PALMAS DR	E	6	AAC	2	1,830	32	58,560	10/5/24	100	0	0	0	Overlay - AC Structural	10/5/24
SUNCRT	19865	SUNNYCREST DR	VALENCIA MESA DR	SUNNY KNOLL	E		AC	0	375	32	12,000	4/8/25	85	0	100	0	New Construction - Initial	1/1/10
SUNCRT	19870	SUNNYCREST DR	SUNNY KNOLL	RICHMAN AVE	E		AC	0	1,115	32	35,680	4/8/25	80	0	100	0	New Construction - Initial	1/1/10
SUNCRT	19880	SUNNYCREST DR	RICHMAN AVE	VALLEY VIEW DR	E		AC	0	1,810	32	57,920	4/8/25	86	0	100	0	New Construction - Initial	1/1/10
SUNRSE	19960	SUNRISE LN	SUNSET LN	CONEJO LN	E	8	AC	2	615	32	19,680	4/11/25	96	0	71	29	Complete Reconstruction - AC	10/1/20
SUNRSE	19970	SUNRISE LN	CONEJO LN	LAS LANAS LN	E	8	AC	2	531	32	22,560	4/11/25	97	0	100	0	Complete Reconstruction - AC	10/1/20

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
SUNSET	19980	SUNSET LN	CAMINO CENTROLOMA	CALLE ALEGRIA	E	8	AC	2	1,720	32	55,040	4/11/25	97	0	78	22	Complete Reconstruction - AC	1/1/20
SUNSET	19990	SUNSET LN	CALLE ALEGRIA	LOMA VERDE DR	E	8	AC	2	488	32	15,616	4/11/25	93	0	36	64	Complete Reconstruction - AC	1/1/20
SUNSET	19992	SUNSET LN	LOMA VERDE DR	CANYON DR	E	8	AC	2	1,150	32	38,300	4/11/25	95	0	41	59	Complete Reconstruction - AC	10/1/20
SUNSET	19995	SUNSET LN	LOMA ALTA DR	S END	E	8	AC	2	150	32	4,800	4/11/25	96	0	100	0	Complete Reconstruction - AC	10/1/20
SWEET	20000	SWEET AVE	CHAPMAN AVE	AMERIGE AVE	E	7	AC	2	935	32	29,920	12/22/21	27	78	21	1	New Construction - Initial	1/1/80
SYCMRE	20005	SYCAMORE AVE	HALE AVE	FULLERTON CREEK DR	E	5	AC	2	135	32	4,320	12/10/20	45	33	43	24	New Construction - Initial	1/1/80
SYCMRE	20010	SYCAMORE AVE	OLD RIVER RD	OLD CREEK LN	E	5	AC	2	735	32	23,520	5/8/25	90	0	100	0	New Construction - Initial	1/1/80
SYCMRE	20020	SYCAMORE AVE	MELODY LN	END	E	5	AC	2	320	32	10,240	11/24/20	12	95	5	0	New Construction - Initial	1/1/80
SYCMRE	20030	SYCAMORE AVE	NUTWOOD AVE	BROOKDALE PL	E	4	AC	2	350	32	11,200	4/21/25	13	97	3	0	New Construction - Initial	1/1/80
SYCMRE	20031	SYCAMORE AVE	BROOKDALE PL	END	E	5	AC	2	994	32	37,305	4/21/25	43	63	22	15	New Construction - Initial	1/1/80
TAMRCK	20040	TAMARACK DR	END	GLENWOOD AVE	E	2	AAC	2	275	32	8,800	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
TAMRCK	20050	TAMARACK DR	END	ROSLYNN AVE	E	2	AC	2	795	26	20,670	11/22/21	94	0	89	11	Complete Reconstruction - AC	6/1/18
TAMRCK	20060	TAMARACK DR	END	HILL AVE	E	2	AC	2	345	32	11,040	2/17/22	82	44	25	31	New Construction - Initial	1/1/80
TARYTN	20070	TARRYTOWN DR	PIONEER AVE	POST RD	E	8	AC	2	140	32	4,480	4/17/25	44	61	38	1	New Construction - Initial	1/1/80
TARYTN	20073	TARRYTOWN DR	POST RD	CARLETON WY	E	8	AC	2	535	32	17,120	4/17/25	30	61	32	7	New Construction - Initial	1/1/80
TARYTN	20076	TARRYTOWN DR	CARLETON WY	E END	E	8	AC	2	365	32	11,680	4/17/25	20	67	23	10	New Construction - Initial	1/1/80
TEAKPL	20080	TEAK PL	END	EVERGREEN AVE	E	5	AC	2	145	32	4,640	12/4/20	93	74	26	0	Cold Mill and Overlay	8/1/18
TEALDR	20090	TEAL DR	LONGSPUR DR	SPARROW DR	E	4	AC	2	520	32	16,640	2/27/25	86	0	100	0	Surface Treatment - Slurry Seal	5/25/20
TERIPL	20100	TERI PL	AMHERRST AVE	MILTON AVE	E	4	AC	2	618	32	19,776	11/24/20	84	32	68	0	New Construction - Initial	1/1/80
TERMNO	20110	TERMINO PL	XIMENO DR	CIENAGA DR	E	6	AC	2	260	32	8,320	4/18/25	56	42	42	16	Surface Treatment - Slurry Seal	5/25/20
TERAZA	20120	TERRAZA PL	LAKESIDE DR	DOMINGO RD	E	6	AC	2	1,105	32	35,360	12/23/20	40	53	14	33	New Construction - Initial	1/1/80
TERAZA	20130	TERRAZA PL	DOMINGO RD	SANTA BARBARA AVE	E	6	AC	2	1,580	32	50,560	12/23/20	26	60	15	25	New Construction - Initial	1/1/80
TERAZA	20140	TERRAZA PL	SANTA BARBARA AVE	RANCHO CIR	E	6	AC	2	1,460	32	46,720	12/23/20	29	69	11	20	New Construction - Initial	1/1/80
TERAZA	20150	TERRAZA PL	RANCHO CIR	DOMINGO RD	E	6	AC	2	2,035	32	65,120	12/3/20	63	62	25	13	New Construction - Initial	1/1/80
TETON	20160	TETON DR	SUNNY HILLS RD	LAS PALMAS DR	E	6	AC	2	265	32	8,480	4/18/25	74	0	47	53	Surface Treatment - Slurry Seal	5/25/20
TETON	20165	TETON DR	LAS PALMAS DR	HERMOSA RD	E	6	AAC	2	840	32	26,880	10/5/24	100	0	0	0	Overlay - AC Structural	10/5/24
THOMAS	20170	THOMAS WAY	LOCUST AVE	ADLENA DR	E	7	AC	2	680	26	17,680	4/23/25	31	69	14	17	New Construction - Initial	1/1/80
THOPSN	20180	THOMPSON AVE	COMMONWEALTH AVE	END	E	7	AC	2	550	32	17,600	5/9/25	96	0	100	0	Surface Treatment - Slurry Seal	6/5/24
THOPSN	20190	THOMPSON AVE	END	LOUISE PL	E	7	AC	2	210	32	6,720	5/9/25	95	0	84	16	Surface Treatment - Slurry Seal	6/1/24
THORN	20200	THORN PL	END	WINCHESTER ST	E	4	AC	2	470	32	15,040	12/4/20	39	64	33	3	New Construction - Initial	1/1/80
THORN	20210	THORN PL	END	DEVONSHIRE AVE	E	4	AC	2	260	32	8,320	12/4/20	23	60	38	2	New Construction - Initial	1/1/80
TIFFNY	20220	TIFFANY PL	FAIRGREEN DR	END	E	8	AC	2	505	32	16,160	4/23/25	32	48	43	9	New Construction - Initial	1/1/80
TIFFNY	20230	TIFFANY PL	SUNNY RIDGE DR	END	E	8	AAC	2	570	32	18,240	5/5/25	100	0	0	0	Overlay - AC Structural	5/5/25
TITAN	20240	TITAN DR	NUTWOOD AVE	END	E	4	AC	2	380	37	14,060	4/21/25	73	13	86	1	New Construction - Initial	1/1/80
TOPAZ	20250	TOPAZ LN	PLACENTIA AVE	SAPPHIRE RD	E	4	AC	2	1,290	37	47,730	1/13/21	62	37	61	2	New Construction - Initial	1/1/80
TOPAZ	20260	TOPAZ LN	SAPPHIRE RD	BRADFORD AVE	E	4	AC	2	1,265	32	40,480	4/21/25	54	38	17	45	Surface Treatment - Slurry Seal	5/25/20
TOUSAU	20270	TOUSSAU DR	LONGVIEW DR	VALLE VISTA DR	E	5	AC	2	980	32	31,360	4/15/25	72	44	55	1	New Construction - Initial	1/1/80
TREEVW	20280	TREEVIEW PL	DEERPARK DR	END	E	4	AC	2	1,055	32	33,760	2/27/25	78	64	28	8	Surface Treatment - Slurry Seal	5/25/20
TREEVW	20290	TREEVIEW PL	END	MEDFORD PL	E	4	AC	2	530	32	16,960	11/24/20	86	0	100	0	Surface Treatment - Slurry Seal	5/25/20
TRIEST	20300	TRIESTE WAY	SUNNY RIDGE DR	CANDLEWOOD DR	E	8	AC	2	915	32	29,280	4/17/25	23	63	23	14	New Construction - Initial	1/1/80
TRUMAN	20310	TRUMAN AVE	N END	CHAPMAN AVE	E	2	AC	2	190	26	4,940	12/20/21	25	91	9	0	New Construction - Initial	1/1/80
TRUSLW	20320	TRUSLOW AVE	RICHMAN AVE	HIGHLAND AVE	E	2	AC	2	1,387	32	44,384	12/1/21	95	0	100	0	New Construction - Initial	1/1/80
TRUSLW	20325	TRUSLOW AVE	HIGHLAND AVE	HARBOR BL	E	2	AC	2	1,400	32	44,800	12/1/21	83	0	100	0	New Construction - Initial	1/1/80
TRUSLW	20330	TRUSLOW AVE	HARBOR BL	END	E	3	AC	2	1,255	32	40,160	12/1/21	88	0	95	5	New Construction - Initial	1/1/80
TRUSLW	20340	TRUSLOW AVE	END	BALCOM AVE	E	3	AC	2	1,210	32	38,720	11/22/21	94	0	100	0	Cold Mill and Overlay	1/1/17
TRUSLW	20350	TRUSLOW AVE	BALCOM AVE	END	E	3	AC	2	460	26	11,960	11/22/21	95	0	100	0	Cold Mill and Overlay	1/1/17
TRUSLW	20355	TRUSLOW AVE	WALNUT AVE	END	E	3	AC	2	635	36	29,530	12/6/21	92	0	96	4	New Construction - Initial	1/1/80
TUNALS	20360	TUNALES DR	LAS RIENDAS DR	LAS PALMAS DR	E	6	AC	2	845	32	27,040	4/18/25	64	41	29	30	Surface Treatment - Slurry Seal	5/25/20
TURNER	20370	TURNER AVE	COMMONWEALTH AVE	CAROL DR	E	7	AC	2	510	26	13,260	4/20/23	93	0	63	37	New Construction - Initial	1/1/80
TURNER	20372	TURNER AVE	CAROL DR	CUL-DE-SAC (S)	E	7	AC	2	470	26	13,420	4/20/23	95	0	100	0	New Construction - Initial	1/1/80
TURNER	20375	TURNER AVE	EOP	WHITAKER ST	E	7	AC	2	155	32	4,960	4/27/23	30	65	35	0	New Construction - Initial	1/1/80
TWILGT	20380	TWILIGHT DR	LAS RIENDAS DR	SUNNY HILLS RD	E	6	AC	2	580	32	18,560	12/23/20	78	40	55	5	New Construction - Initial	1/1/80
TWILGT	20390	TWILIGHT DR	LAS PALMAS DR	HERMOSA RD	E	6	AAC	2	850	32	27,200	10/5/24	100	0	0	0	Overlay - AC Structural	10/5/24
TWILGT	20395	TWILIGHT DR	HERMOSA RD	ROSARITA DR	E	6	AC	2	950	32	30,400	11/25/20	94	0	14	86	Cold Mill and Overlay	8/1/17
UNION	20400	UNION AVE	GLENWOOD DR	WOODS AVE	E	2	AC	2	372	32	13,404	12/20/21	29	79	20	1	New Construction - Initial	1/1/80
UNION	20410	UNION AVE	DRAKE AVE	RICHMAN AVE	E	2	AAC	2	375	28	10,500	12/20/21	100	0	0	0	Overlay - AC Structural	12/2/21
UNION	20420	UNION AVE	VISTA VERDE DR	HARBOR BL	E	2	AC	2	1,045	32	33,440	12/17/21	47	83	17	0	New Construction - Initial	1/1/80
UNION	20425	UNION AVE	HARBOR BL	POMONA AVE	E	3	AC	2	705	32	22,560	5/8/25	94	0	59	41	Surface Treatment - Slurry Seal	6/1/24
UNION	20430	UNION AVE	YALE AVE	RAYMOND AVE	E	3	AAC	2	1,485	32	47,520	8/1/22	100	0	0	0	Overlay - AC Structural	8/1/22
UNION	20440	UNION AVE	RAYMOND AVE	RIEDEL AVE	E	3	AC	2	1,045	32	33,440	11/17/21	95	0	100	0	New Construction - Initial	1/1/80
UNION	20450	UNION AVE	VICTORIA DR	END	E	3	AAC	2	260	26	6,760	12/6/21	94	0	86	14	Overlay - AC Structural	11/2/21
UNION	20460	UNION AVE	MOUNTAIN VIEW PL	END	E	4	AC	2	315	32	10,080	11/24/20	42	64	36	0	New Construction - Initial	1/1/80
VALEND	20470	VALENCIA DR	HIGHLAND AVE	HARBOR BLVD	E	2	AC	2	1,260	32	40,320	11/29/21	77	29	71	0	New Construction - Initial	1/1/80
VALEND	20475	VALENCIA DR	HARBOR BLVD	LEMON AVE	E	3	AC	2	1,265	32	40,480	11/29/21	85	49	51	0	New Construction - Initial	1/1/80
VALEND	20480	VALENCIA DR	LEMON AVE	LAWRENCE	E	3	AC	2	615	32	19,680	11/29/21	95	0	100	0	New Construction - Initial	1/1/80
VALEND	20485	VALENCIA DR	LAWRENCE	END	E	3	AC	2	970	60	58,200	11/29/21	94	0	100	0	New Construction - Initial	1/1/80
VALEND	20490	VALENCIA DR	END	RAYMOND AVE	E	3	AC	2	630	32	20,160	12/16/21	90	0	88	12	New Construction - Initial	1/1/80
VALMES	20265	VALENCIA MESA DR	LAGUNA RD	HARBOR BL	E	7	AC	2	430	53	22,790	4/23/25	48	53	42	5	New Construction - Initial	1/1/80
VALMES	20268	VALENCIA MESA DR	HARBOR BL	E END	E	7	AC	4	553	42	23,226	4/18/25	81	45	55	0	New Construction - Initial	1/1/80
VALMES	20500	VALENCIA MESA DR	BASTANCHURY RD	CRESTVIEW DR	E	7	AAC	2	2,195	32	70,240	10/1/24	100	0	0	0	Overlay - AC Structural	10/1/24
VALMES	20510	VALENCIA MESA DR	CRESTVIEW DR	EUCLID AVE	E	7	AAC	2	850	32	27,200	10/1/24	100	0	0	0	Overlay - AC Structural	10/1/24
VALMES	20515	VALENCIA MESA DR	EUCLID AVE	GLENVIEW DR	E	7	AC	2	815	32	26,080	4/22/25	34	19	68	13	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
VALMES	20520	VALENCIA MESA DR	GLENVIEW DR	RICHMAN KNOLL	E	7	AC	2	1,175	32	37,600	4/23/25	36	30	50	20	New Construction - Initial	1/1/80
VALMES	20522	VALENCIA MESA DR	RICHMAN KNOLL	PEPPERTREE RD	E	7	AC	2	1,420	32	46,940	4/23/25	43	31	61	8	New Construction - Initial	1/1/80
VALMES	51000	VALENCIA MESA DR	PEPPERTREE RD	SUNNY CREST DR	E	7	AC	2	505	50	25,250	4/23/25	17	50	37	13	New Construction - Initial	1/1/80
VALMES	51002	VALENCIA MESA DR	SUNNY CREST DR	LAGUNA RD (ROUNDABOUT)	E	7	AC	2	375	53	19,875	4/23/25	23	50	44	6	New Construction - Initial	1/1/80
VALERA	20540	VALERA WAY	END	LA SENDA DR	E	6	AC	2	180	32	5,760	12/11/20	26	76	21	3	New Construction - Initial	1/1/80
VALVIS	20550	VALLE VISTA DR	SKYLINE DR	LONGVIEW DR	E	5	AC	2	1,650	32	52,800	4/15/25	73	29	71	0	New Construction - Initial	1/1/80
VALLEY	20560	VALLEY LN	END	LOMA ALTA DR	E	8	AC	2	490	32	15,680	4/11/25	97	0	88	12	Complete Reconstruction - AC	10/1/20
VALVWD	20570	VALLEY VIEW DR	BASTANCHURY RD	CARHART AVE	E	7	AC	2	710	36	25,560	4/25/23	86	0	100	0	New Construction - Initial	1/1/80
VALVWD	20575	VALLEY VIEW DR	CARHART AVE	LA MESA	E	7	AC	2	1,335	36	48,060	4/25/23	86	0	76	24	New Construction - Initial	1/1/80
VALVWD	20580	VALLEY VIEW DR	EUCLID AVE	WOODS AVE	E	7	AC	2	1,301	32	41,632	4/8/25	87	10	61	29	New Construction - Initial	1/1/80
VALVWD	20585	VALLEY VIEW DR	WOODS AVE	GRANDVIEW DR	E	7	AC	2	652	32	20,864	4/8/25	46	83	14	3	New Construction - Initial	1/1/80
VALVWD	20590	VALLEY VIEW DR	GRANDVIEW DR	RICHMAN AVE	E	7	AC	2	660	32	21,120	4/23/25	27	57	16	27	New Construction - Initial	1/1/80
VALVWD	20595	VALLEY VIEW DR	RICHMAN AVE	GLENHAVEN AVE	E	7	AC	2	365	32	11,680	4/8/25	41	75	12	13	New Construction - Initial	1/1/80
VALVWD	20596	VALLEY VIEW DR	GLENHAVEN AVE	HIGHLAND AVE	E	7	AC	2	548	36	19,728	4/23/25	62	37	31	32	New Construction - Initial	1/1/80
VALVWD	20600	VALLEY VIEW DR	HIGHLAND AVE	AVOLENCIA DR	E	7	AC	2	695	36	25,020	4/8/25	60	5	50	45	New Construction - Initial	1/1/80
VALVWD	20603	VALLEY VIEW DR	AVOLENCIA DR	SUNNY CREST DR	E	7	AC	3	390	60	18,370	4/8/25	65	13	87	0	New Construction - Initial	1/1/80
VALVWD	20606	VALLEY VIEW DR	SUNNY CREST DR	HARBOR BL	E	7	AC	4	822	50	41,100	4/8/25	77	0	100	0	New Construction - Initial	1/1/80
VALVWD	50020	VALLEY VIEW DR	LEMON ST	HARBOR BLVD	E	5	AC	2	1,393	32	44,576	2/20/24	83	0	45	55	New Construction - AC	1/1/80
VALVWP	20610	VALLEY VIEW PL	VALLEY VIEW DR	END	E	7	AAC	2	469	32	18,208	4/16/22	100	0	0	0	Overlay - AC Structural	4/16/22
VALWOD	20620	VALWOOD DR	LONGVIEW DR	END	E	5	AC	2	1,995	32	63,840	1/13/21	36	53	35	12	New Construction - Initial	1/1/80
VANGFT	20630	VANDERGRIFT DR	DEERPARK DR	END	E	4	AC	2	130	32	4,160	2/27/25	78	26	40	34	Surface Treatment - Slurry Seal	5/25/20
VENTRA	20640	VENTURA PL	WALNUT AVE	END	E	7	AC	2	230	32	7,360	4/27/23	85	0	47	53	New Construction - Initial	1/1/80
VERDUGO	9950	VERDUGO PL	VIA INGRESO	END	E	8	AAC	2	153	32	4,896	4/22/25	96	0	100	0	Overlay - AC Structural	7/4/19
VERMNT	20650	VERMONT AVE	END	GREGORY AVE	E	7	AC	2	130	32	4,160	4/25/23	81	0	100	0	New Construction - Initial	1/1/80
VERMNT	20660	VERMONT AVE	COMMONWEALTH AVE	CAROL DR	E	7	AC	2	450	32	14,400	4/27/23	93	0	67	33	New Construction - Initial	1/1/80
VERONA	20670	VERONA DR	RANCHO CIR	PASEO DORADO	E	6	AC	2	2,205	32	70,560	12/3/20	41	51	38	11	New Construction - Initial	1/1/80
VERONA	20680	VERONA DR	PASEO DORADO	DOMINGO RD	E	6	AC	2	285	32	9,120	12/30/20	33	60	18	22	New Construction - Initial	1/1/80
VIABUR	20690	VIA BURTON	END	BAXTER ST / EASTERN CITY LIMIT	E	4	AC	2	560	32	17,920	1/6/21	45	72	23	5	New Construction - Initial	1/1/80
VIACAL	20700	VIA CALIENTE	AVENIDA SAN LORENZO	YERMO PL	E	8	AAC	2	715	32	22,880	4/11/25	96	0	100	0	Overlay - AC Structural	4/1/23
VIACOD	20710	VIA CODO	END	LAKEVIEW DR	E	6	AC	2	615	32	19,680	5/9/25	89	82	10	8	Surface Treatment - Cape Seal	12/1/24
VIAING	20720	VIA INGRESO	GILBERT ST	CALLE ALEGRIA	E	8	AAC	2	720	32	23,040	4/22/25	95	0	64	36	Overlay - AC Structural	7/4/19
VIAMIR	20730	VIA MIRADA	EL RANCHO VISTA	VIA INGRESO	E	8	AAC	2	415	32	13,280	4/21/25	94	0	89	11	Overlay - AC Structural	5/25/19
VIAMIR	20740	VIA MIRADA	GILBERT ST	LOMA ALTA DR	E	8	AC	2	975	32	31,200	4/11/25	97	0	87	13	Complete Reconstruction - AC	10/1/20
VICTRD	20750	VICTORIA DR	OLD CREEK LN	DOROTHY LN	E	5	AC	2	1,330	32	42,560	12/15/20	38	77	23	0	New Construction - Initial	1/1/80
VICTRD	20760	VICTORIA DR	DOROTHY LN	UNION AVE	E	4	AAC	2	1,836	32	58,752	2/17/22	100	0	0	0	Surface Reconstruction - AC	12/2/21
VICTRD	20770	VICTORIA DR	UNION AVE	CHAPMAN AVE	E	3	AAC	2	2,080	32	66,560	2/17/22	100	0	0	0	Surface Reconstruction - AC	12/2/21
VINEAV	20780	VINE AVE	END	LOUISE PL	E	7	AC	2	240	32	7,680	5/9/25	95	0	100	0	Surface Treatment - Slurry Seal	6/1/24
VINEAV	20785	VINE AVE	OAK AVE	FLOWER	E	1	AC	2	250	32	8,000	4/20/23	95	0	100	0	Surface Treatment - Slurry Seal	7/1/12
VINEAV	20790	VINE AVE	FLOWER	CHERRY AVE	E	1	AC	2	546	32	17,472	4/20/23	89	44	56	0	Surface Treatment - Slurry Seal	7/1/12
VINEAV	20792	VINE AVE	CHERRY AVE	PORTER AVE	E	1	AC	2	465	32	14,880	4/18/23	93	0	100	0	Surface Treatment - Slurry Seal	7/1/12
VINEAV	20795	VINE AVE	ORANGETHORPE	END	E	1	AAC	2	230	32	7,360	4/17/23	95	0	100	0	Overlay - AC Structural	4/16/22
VIRGNA	20800	VIRGINIA RD	LEMON ST	LUANNE AVE	E	5	AC	2	605	28	16,940	12/3/20	88	0	100	0	New Construction - Initial	1/1/80
VIRGNA	20805	VIRGINIA RD	LUANNE AVE	SHEPPARD DR	E	5	AC	2	395	26	10,270	12/3/20	27	69	20	11	New Construction - Initial	1/1/80
VIRGNA	20810	VIRGINIA RD	LONGVIEW DR	VALLE VISTA DR	E	5	AC	2	915	32	29,280	4/15/25	77	26	73	1	New Construction - Initial	1/1/80
VIRGNA	20820	VIRGINIA RD	END	STANFORD AVE	E	5	AC	2	255	32	8,160	12/15/20	67	57	43	0	New Construction - Initial	1/1/80
VIRGNA	20830	VIRGINIA RD	RIEDEL AVE	END	E	5	AC	2	865	32	27,680	4/16/25	75	26	67	7	New Construction - Initial	1/1/80
VIRGNA	20840	VIRGINIA RD	VICTORIA DR	CONCORD AVE	E	5	AC	2	760	32	24,320	11/24/20	42	64	36	0	New Construction - Initial	1/1/80
VISDMR	20850	VISTA DEL MAR	END	ACACIA AVE	E	5	AC	2	682	32	24,324	1/6/21	12	76	9	15	New Construction - Initial	1/1/80
VISTA	20860	VISTA LN	VALLEY VIEW DR	FERN DR	E	2	AC	2	645	32	20,640	12/20/21	81	0	79	21	New Construction - Initial	1/1/80
VISLOM	20870	VISTA LOMITAS DR	VISTA DEL MAR	END	E	5	AC	2	424	32	13,568	1/6/21	21	87	8	5	New Construction - Initial	1/1/80
VISVER	20880	VISTA VERDE DR	HIGHLAND AVE	END	E	2	AAC	2	1,185	28	33,180	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
WALDO	20890	WALDO AVE	COMMONWEALTH AVE	CAROL DR	E	7	AC	2	510	26	13,260	4/20/23	92	0	73	27	New Construction - Initial	1/1/80
WALDO	20892	WALDO AVE	CAROL DR	SOUTH END	E	7	AC	2	160	26	4,160	4/20/23	95	0	100	0	New Construction - Initial	1/1/80
WALDO	20895	WALDO AVE	NORTH END	VALENCIA DR	E	7	AC	2	490	32	15,680	4/27/23	33	78	17	5	New Construction - Initial	1/1/80
WALLCE	20900	WALLACE AVE	SANTA CLARA AVE	DEREK DR	E	4	AC	2	1,100	32	35,200	2/27/25	82	17	80	3	Surface Treatment - Slurry Seal	5/25/20
WALNTA	20910	WALNUT AVE	PINE DR	END	E	7	AC	2	1,405	32	44,960	4/27/23	85	52	27	21	New Construction - Initial	1/1/80
WALNTA	20920	WALNUT AVE	END	PACIFIC DR	E	7	AAC	2	570	32	18,240	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
WALNTA	20930	WALNUT AVE	RICHMAND AVE	HIGHLAND AVE	E	2	AC	2	1,300	32	41,600	12/1/21	71	74	26	0	New Construction - Initial	1/1/80
WALNTA	20940	WALNUT AVE	HIGHLAND AVE	HARBOR BLVD BRIDGE	E	2	AC	2	1,235	32	39,520	12/1/21	94	0	94	6	New Construction - Initial	1/1/80
WALNTA	20950	WALNUT AVE	HARBOR BLVD BRIDGE	LEMON ST BRIDGE	E	3	AC	2	1,215	32	38,880	12/1/21	83	0	100	0	New Construction - Initial	1/1/80
WALNTA	20960	WALNUT AVE	LEMON ST BRIDGE	END	E	3	AC	2	530	45	23,850	11/22/21	72	79	21	0	New Construction - Initial	1/1/80
WALNTA	20970	WALNUT AVE	BALCOM AVE	END	E	3	AC	2	1,920	32	61,440	11/19/21	87	0	100	0	New Construction - Initial	1/1/80
WALNTA	20980	WALNUT AVE	END	RAYMOND AVE	E	3	AC	2	625	32	20,000	12/6/21	91	0	100	0	New Construction - Initial	1/1/80
WALNTA	20990	WALNUT AVE	RAYMOND AVE	ACACIA AVE	E	3	AC	2	2,565	36	92,340	12/6/21	90	0	100	0	New Construction - Initial	1/1/80
WALNTA	21000	WALNUT AVE	ACACIA AVE	HALE AVE	E	4	AC	2	950	36	34,200	3/18/25	85	18	82	0	Surface Treatment - Slurry Seal	5/25/20
WALNTA	21010	WALNUT AVE	HALE AVE	STATE COLLEGE BLVD	E	4	AC	2	1,600	36	57,600	3/18/25	87	31	65	4	Surface Treatment - Slurry Seal	5/25/20
WALNTA	21015	WALNUT AVE	ALLEY W/O LAWRENCE AVE	ALLEY E/O LAWRENCE AVE	E	3	AC	2	1,180	23	27,140	11/22/21	95	0	100	0	Cold Mill and Overlay	1/1/17
WALNTW	21020	WALNUT WAY	WALNUT AVE	LEMON ST	E	3	AC	2	434	32	13,888	12/1/21	78	31	41	28	New Construction - Initial	1/1/80
WANDA	21025	WANDA DR	CHAPMAN AVE	END	E	7	AC	2	1,090	32	34,880	4/22/25	26	66	20	14	New Construction - Initial	1/1/80
WANDA	21030	WANDA DR	GREGORY AVE	CHAPMAN AVE	E	7	AC	2	1,125	32	36,000	4/2/25	93	0	100	0	New Construction - Initial	1/1/80
WANDA	21040	WANDA DR	WALNUT AVE	VALENCIA DR	E	7	AAC	2	475	32	15,200	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
WARBTN	21060	WARBURTON WAY	U.P.R.R.	BASTANCHURY RD	E	8	AC	5	280	53	14,840	4/2/25	74	0	68	32	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
WASGTN	21070	WASHINGTON AVE	WEST AVE	ELM	E	2	AC	2	460	32	14,720	2/17/22	59	75	25	0	Surface Treatment - Slurry Seal	7/1/12
WASGTN	21075	WASHINGTON AVE	ELM	ROSSLYNN AVE	E	2	AC	2	245	32	7,840	2/17/22	24	69	9	22	Surface Treatment - Slurry Seal	7/1/12
WASGTN	21080	WASHINGTON AVE	KNEPP AVE	ORANGETHORPE AVE	E	2	AC	2	1,025	32	32,800	12/1/21	60	69	31	0	Surface Treatment - Slurry Seal	7/1/12
WAYNE	21090	WAYNE AVE	END	WILSHIRE AVE	E	7	AC	2	960	32	30,720	4/23/25	40	67	21	12	New Construction - Initial	1/1/80
WESLEY	21100	WESLEY AVE	BUENA VISTA DR	MALVERN AVE	E	7	AC	2	610	28	17,080	12/23/21	96	0	100	0	Complete Reconstruction - AC	11/1/16
WESTAV	21110	WEST AVE	HASTINGS AVE	MEADE	E	1	AAC	2	580	32	18,560	4/27/23	95	0	100	0	Overlay - AC Structural	4/16/22
WESTAV	21115	WEST AVE	MEADE	END	E	1	AAC	2	435	32	13,920	4/27/23	95	0	100	0	Surface Reconstruction - AC	4/16/22
WESTAV	21120	WEST AVE	MAGNOLIA AVE	PRITCHARD AVE	E	1	AC	2	965	33	31,845	4/20/23	19	95	4	1	Surface Treatment - Slurry Seal	7/1/12
WESTAV	21130	WEST AVE	PINE DR	END	E	1	AC	2	580	32	18,560	4/18/23	76	65	25	10	Surface Treatment - Slurry Seal	7/1/12
WESTAV	21140	WEST AVE	COURTNEY AVE	BROOKHURST RD	E	1	AC	2	1,295	32	41,440	4/18/23	34	74	14	12	Surface Treatment - Slurry Seal	7/1/12
WESTAV	21150	WEST AVE	LOCUST AVE	BASQUE AVE	E	1	AC	2	1,890	32	60,480	4/23/25	24	69	17	14	Surface Treatment - Slurry Seal	7/1/12
WESTAV	21160	WEST AVE	BASQUE AVE	LEE AVE	E	1	AC	2	685	32	21,920	3/19/25	30	58	42	0	Surface Treatment - Slurry Seal	7/1/12
WESTAV	21170	WEST AVE	END	EUCLID	E	1	AC	2	620	32	19,840	3/19/25	75	65	26	9	Surface Treatment - Slurry Seal	7/1/12
WESTAV	21175	WEST AVE	EUCLID	ALLEY W/ ROOSEVELT	E	2	AC	2	145	32	4,946	12/1/21	94	0	88	12	Surface Treatment - Slurry Seal	7/1/12
WESTAV	21176	WEST AVE	ALLEY W/ ROOSEVELT	ROOSEVELT AVE	E	2	AC	2	103	32	3,405	12/1/21	48	76	24	0	Surface Treatment - Slurry Seal	7/1/12
WESTAV	21180	WEST AVE	ADAMS AVE	WASHINGTON AVE	E	2	AC	2	391	32	12,512	2/17/22	72	63	37	0	Surface Treatment - Slurry Seal	7/1/12
WESTAV	21190	WEST AVE	WOODS AVE	FORD AVE	E	2	AC	2	2,125	32	68,000	11/29/21	46	82	18	0	New Construction - Initial	1/1/80
WESTAV	50040	WEST AVE	PRITCHARD AVE	JENSEN WAY	E	1	AC	2	855	32	27,360	4/20/23	79	34	66	0	Surface Treatment - Slurry Seal	7/1/12
WESTAV	50050	WEST AVE	JENSEN WAY	GILBERT ST	E	1	AC	2	580	32	18,560	4/20/23	48	51	49	0	Surface Treatment - Slurry Seal	7/1/12
WESTRG	21200	WESTRIDGE KNOLL	END	VALLEY VIEW DR	E	7	AC	2	205	28	5,740	4/8/25	92	0	100	0	New Construction - Initial	1/1/80
WHTNGA	21230	WHITING AVE	DRAKE AVE	RICHMAN AVE	E	2	AC	2	640	32	20,480	12/20/21	93	0	100	0	New Construction - Initial	1/1/80
WHTNGA	21240	WHITING AVE	FORD AVE	HIGHLAND AVE	E	2	AC	2	625	32	20,000	12/22/21	87	0	100	0	New Construction - Initial	1/1/80
WHTNGA	21245	WHITING AVE	HIGHLAND AVE	HARBOR BL	E	2	AC	2	1,275	32	40,800	6/5/26	67	60	22	18	Surface Treatment - REAS	7/30/25
WHTNGA	21248	WHITING AVE	W END	POMONA AVE	E	3	AC	2	170	32	5,440	12/3/21	95	0	100	0	New Construction - Initial	1/1/80
WHTNGA	21250	WHITING AVE	POMONA AVE	LEMON ST	E	3	AC	2	615	28	17,220	12/3/21	95	0	100	0	New Construction - Initial	1/1/80
WHTNGA	21260	WHITING AVE	STANFORD AVE	RAYMOND AVE	E	3	AC	2	450	28	12,600	11/19/21	42	27	67	6	New Construction - Initial	1/1/80
WHTNGA	21265	WHITING AVE	MOUNTAIN VIEW PL	HALE AVE	E	4	AC	2	520	32	16,640	5/14/25	87	22	78	0	Surface Treatment - Slurry Seal	6/1/24
WILDWD	21270	WILDWOOD CT	END	HOLLYOAK DR	E	5	AC	2	185	26	4,810	4/22/25	89	0	73	27	New Construction - Initial	1/1/80
WILDWD	21280	WILDWOOD CT	N END	MOUNTAIN RIDGE DR	E	4	AC	2	270	26	7,020	4/21/25	84	0	66	34	New Construction - Initial	1/1/80
WILDWD	21290	WILDWOOD CT	MOUNTAIN RIDGE DR	S END	E	4	AC	2	335	26	8,710	4/21/25	88	0	86	14	New Construction - Initial	1/1/80
WLMSON	21300	WILLIAMSON AVE	JENSEN AVE	GILBERT ST	E	7	AC	2	840	32	26,880	4/27/23	85	0	31	69	New Construction - Initial	1/1/80
WLMSON	21310	WILLIAMSON AVE	COMMONWEALTH AVE	EUCLID ST	E	7	AC	2	1,245	32	39,840	4/1/25	18	70	14	16	New Construction - Initial	1/1/80
WLMSON	21320	WILLIAMSON AVE	EUCLID ST	WOODS AVE	E	2	AC	2	1,290	32	41,280	12/1/21	27	89	11	0	New Construction - Initial	1/1/80
WLMSON	21330	WILLIAMSON AVE	WOODS AVE	CHESTNUT PL	E	2	AC	2	740	36	26,640	12/1/21	91	0	100	0	New Construction - Initial	1/1/80
WLMSON	21335	WILLIAMSON AVE	CHESTNUT PL	RICHMAN AVE	E	2	AC	2	542	35	18,970	12/1/21	78	51	49	0	New Construction - Initial	1/1/80
WILLOW	21340	WILLOW AVE	ROLLING HILLS DR	BEECHWOOD AVE	E	5	AC	2	625	32	20,000	11/25/20	92	0	100	0	New Construction - Initial	1/1/80
WILSHR	21350	WILSHIRE AVE	WAYNE AVE	MICHAEL AVE	E	7	AC	2	760	32	24,320	4/23/25	24	62	21	17	New Construction - Initial	1/1/80
WILSHR	21360	WILSHIRE AVE	RUSSELL AVE	MARIE AVE	E	7	AC	2	640	32	20,480	12/22/21	42	48	50	2	New Construction - Initial	1/1/80
WILSHR	21370	WILSHIRE AVE	EUCLID ST	WOODS AVE	E	2	AC	2	1,290	32	41,280	12/2/21	24	87	13	0	New Construction - Initial	1/1/80
WILSHR	21375	WILSHIRE AVE	WOODS AVE	DRAKE AVE	E	2	AC	2	708	32	22,656	12/2/21	95	0	100	0	Cold Mill and Overlay	8/1/18
WILSHR	21380	WILSHIRE AVE	DRAKE AVE	RICHMAN AVE	E	2	AC	2	670	32	21,440	12/2/21	93	0	100	0	Surface Treatment - Slurry Seal	8/1/18
WILSHR	21385	WILSHIRE AVE	RICHMAN AVE	HIGHLAND AVE	E	2	AC	2	1,320	32	42,240	12/2/21	95	0	100	0	Cold Mill and Overlay	8/1/18
WILSHR	21390	WILSHIRE AVE	HIGHLAND AVE	MALDEN AVE	E	2	AC	2	660	38	25,080	12/2/21	95	0	100	0	Cold Mill and Overlay	8/1/18
WILSHR	21393	WILSHIRE AVE	MALDEN AVE	HARBOR BL	E	2	AC	2	625	48	30,000	12/2/21	95	0	100	0	Cold Mill and Overlay	8/1/18
WILSHR	21396	WILSHIRE AVE	HARBOR BL	POMONA AVE	E	3	AC	2	175	36	6,300	12/3/21	100	0	0	0	New Construction - Initial	1/1/80
WILSHR	21399	WILSHIRE AVE	POMONA AVE	LEMON ST	E	3	AC	2	615	36	22,140	12/3/21	90	0	100	0	Surface Treatment - Slurry Seal	8/1/18
WILSHR	21400	WILSHIRE AVE	LEMON ST	LAWRENCE AVE	E	3	AC	2	615	36	22,140	11/19/21	95	0	100	0	Cold Mill and Overlay	8/1/18
WILSHR	21405	WILSHIRE AVE	LAWRENCE AVE	BALCOM AVE	E	3	AC	2	663	36	23,868	11/19/21	78	71	29	0	Surface Treatment - Slurry Seal	8/1/18
WILSHR	21410	WILSHIRE AVE	BALCOM AVE	RAYMOND AVE	E	3	AC	2	2,543	36	91,548	11/19/21	93	0	85	15	Cold Mill and Overlay	8/1/18
WILSHR	21420	WILSHIRE AVE	RAYMOND AVE	MONTAGUE AVE	E	3	AC	2	782	36	28,152	12/6/21	93	0	100	0	Complete Reconstruction - AC	8/1/18
WILSHR	21430	WILSHIRE AVE	MONTAGUE AVE	ACACIA AVE	E	3	AC	2	1,798	36	64,728	12/6/21	90	0	100	0	Surface Treatment - Slurry Seal	8/1/18
WILSHR	21440	WILSHIRE AVE	ACACIA AVE	CONCORD AVE	E	4	AC	2	2,140	32	68,480	5/14/25	89	25	75	0	Surface Treatment - Slurry Seal	6/1/24
WILSON	21450	WILSON AVE	MELODY LN	S END	E	5	AC	2	315	32	10,080	4/21/25	30	60	40	0	New Construction - Initial	1/1/80
WILSON	21460	WILSON AVE	NUTWOOD AVE	CENTRAL AVE	E	4	AC	2	920	32	29,440	4/21/25	19	83	17	0	New Construction - Initial	1/1/80
WINCTR	21470	WINCHESTER ST	IVY PL	HARTFORD ST	E	4	AC	2	540	32	17,280	12/4/20	19	82	18	0	New Construction - Initial	1/1/80
WINCTR	21475	WINCHESTER ST	HARTFORD ST	CAMBRIDGE AVE	E	4	AC	2	250	32	8,000	4/22/25	88	0	100	0	Surface Treatment - Slurry Seal	5/25/20
WINETA	21480	WINETTA PL	END	GREGORY AVE	E	7	AC	2	305	26	7,930	4/2/25	94	0	90	10	New Construction - Initial	1/1/80
WOODBN	21490	WOODBINE AVE	ROLLING HILLS DR	END	E	5	AC	2	805	32	25,760	11/25/20	87	0	61	39	New Construction - Initial	1/1/80
WOODCR	21500	WOODCREST AVE	COURTNEY AVE	CEDAR AVE	E	1	AC	2	770	32	24,640	4/12/23	22	85	15	0	Surface Treatment - Slurry Seal	7/1/12
WOODCR	21510	WOODCREST AVE	PACIFIC DR	EADINGTON AVE	E	1	AC	2	1,045	32	33,440	4/17/23	89	0	100	0	Surface Treatment - Slurry Seal	7/1/12
WOODCR	21515	WOODCREST AVE	EADINGTON AVE	BASQUE AVE	E	1	AC	2	985	32	31,520	4/17/23	84	0	100	0	Surface Treatment - Slurry Seal	7/1/12
WOODCR	21520	WOODCREST AVE	BASQUE AVE	ORCHARD AVE	E	1	AC	2	955	32	30,560	4/17/23	89	0	100	0	Surface Treatment - Slurry Seal	7/1/12
WOODCR	21525	WOODCREST AVE	CITRUS	ORANGE AVE	E	1	AC	2	370	32	11,840	4/17/23	74	36	49	15	Surface Treatment - Slurry Seal	7/1/12
WOODCR	21530	WOODCREST AVE	JEFFERSON AVE	LOMBARD DR	E	2	AC	2	1,295	32	41,440	11/24/21	90	0	100	0	Surface Treatment - Slurry Seal	6/1/19
WOODCR	21540	WOODCREST AVE	END	RICHMAN AVE	E	2	AC	2	295	32	9,440	11/24/21	83	58	42	0	New Construction - Initial	1/1/80
WOODCR	50110	WOODCREST AVE	ORCHARD AVE	CITRUS AVE	E	1	AC	2	695	32	22,240	4/17/23	19	90	10	0	Surface Treatment - Slurry Seal	7/1/12
WOODSA	21550	WOODS AVE	N END	GRANDVIEW AVE	E	2	AC	2	1,855	32	59,360	12/2/21	89	0	100	0	New Construction - Initial	1/1/80
WOODSA	21560	WOODS AVE	GRANDVIEW AVE	CHAPMAN AVE	E	2	AC	2	775	32	24,800	12/2/21	87	0	94	6	New Construction - Initial	1/1/80
WOODSA	21570	WOODS AVE	CHAPMAN AVE	COMMONWEALTH AVE	E	2	AC	2	1,436	32	45,952	12/2/21	57	69	31	0	New Construction - Initial	1/1/80
WOODSA	21575	WOODS AVE	COMMONWEALTH	S END	E	2	AC	2	580	32	18,560	12/2/21	87	35	65	0	New Construction - Initial	1/1/80
WOODSA	21580	WOODS AVE	VALENCIA DR	ASH AVE	E	2	AC	2	605	32	19,360	11/29/21	29	86	11	3	Reconstruct Surface (AC)	7/1/13
WOODSA	21583	WOODS AVE	ASH AVE	ROSSLYNN AVE	E	2	AC	2	709	32	22,688	11/29/21	95	0	100	0	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
WOODSA	21586	WOODS AVE	ROSSLYNN AVE	ORANGETHROPE	E	2	AC	2	1,292	32	41,344	11/29/21	78	66	34	0	New Construction - Initial	1/1/80
WOODSA	21590	WOODS AVE	ORANGETHORPE	END	E	2	AC	2	1,784	32	57,088	11/24/21	91	25	75	0	Surface Treatment - Slurry Seal	6/1/19
WRENWY	21600	WREN WAY	LEGGET LN	END	E	8	AC	2	170	32	5,440	4/23/25	98	0	100	0	New Construction - Initial	1/1/80
XIMENO	21610	XIMENO DR	NIETO PL	TERMINO PL	E	6	AC	2	890	32	28,480	12/23/20	30	79	21	0	New Construction - Initial	1/1/80
YALEAV	21620	YALE AVE	END	GLENWOOD AVE	E	3	AC	2	465	32	14,880	11/17/21	83	0	17	83	New Construction - Initial	1/1/80
YALEAV	21625	YALE AVE	GLENWOOD AVE	CHAPMAN AVE	E	3	AAC	2	2,004	32	64,128	8/1/22	100	0	0	0	Overlay - AC Structural	8/1/22
YALEAV	21630	YALE AVE	CHAPMAN AVE	COMMONWEALTH AVE	E	3	AC	2	1,220	32	39,040	11/19/21	29	19	81	0	New Construction - Initial	1/1/80
YALEAV	21635	YALE AVE	COMMONWEALTH	WALNUT AVE	E	3	AC	2	685	32	21,920	11/19/21	43	54	46	0	New Construction - Initial	1/1/80
YERMO	21640	YERMO PL	SERRANO PL	VIA CALIENTE	E	8	AAC	2	435	32	13,920	4/11/25	98	0	70	30	Overlay - AC Structural	4/1/23
YERMO	21650	YERMO PL	END	CAMINO REY	E	8	AC	2	322	32	12,654	4/21/25	10	68	23	9	New Construction - Initial	1/1/80
YERMO	21660	YERMO PL	END	CAMINO LA VISTA	E	8	AC	2	520	32	16,640	4/22/25	12	59	27	14	New Construction - Initial	1/1/80
YUCCA	21670	YUCCA AVE	END	LAGUNA RD	E	6	AC	2	2,235	32	71,520	4/18/25	39	51	37	12	New Construction - Initial	1/1/80
YUMAWY	21680	YUMA WAY	END	LAGUNA RD	E	6	AC	2	795	28	22,260	1/6/21	94	0	100	0	Surface Treatment - Slurry Seal	5/25/20
									229.5		**39,527,764**							

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
		Arterials / Collectors (MPAH)																
ACACIA	3850	ACACIA AVE	ORANGETHORPE AVE	DAWNS WY	B	4	AC	3	876	60	52,560	2/24/26	8	51	29	20	New Construction - Initial	1/1/80
COMMOA	1090	COMMONWEALTH AVE	LILLIE AVE	LILLIE AVE	B	4	AC	4	212	60	12,720	2/20/26	13	59	41	0	Crack Sealing - AC	4/1/10
COMMOA	1140	COMMONWEALTH AVE	BALFOUR AVE	CHAPMAN AVE	B	4	AC	4	341	60	20,460	2/13/26	14	42	33	25	New Construction - Initial	1/1/84
ROSECA	2030	ROSECRANS AVE	CAMINO CENTROLOMA	SERRANO PL	B	8	AC	5	360	60	21,600	10/22/25	15	65	19	16	New Construction - Initial	1/1/80
YORBLB	4470	YORBA LINDA BLVD	ORANGE FWY (57)	PLACENTIA AVE	B	4	AC	6	1,845	60	110,700	1/8/26	18	69	31	0	New Construction - Initial	1/1/91
ACACIA	3860	ACACIA AVE	DAWNS WY	CARBON CREEK CHANNEL	B	4	AC	3	496	60	29,760	2/24/26	21	51	44	5	New Construction - Initial	1/1/80
COMMOA	1120	COMMONWEALTH AVE	MISSION DR	SAN CARLOS DR	B	4	AC	4	874	60	52,440	2/13/26	21	48	38	14	New Construction - Initial	1/1/84
COMMOA	1050	COMMONWEALTH AVE	HARRINGTON DR	ACACIA AVE	B	3	AC	4	293	60	17,580	2/20/26	22	61	27	12	Crack Sealing - AC	4/1/10
COMMOA	1110	COMMONWEALTH AVE	STATE COLLEGE BLVD	MISSION DR	B	4	AC	4	446	60	26,760	2/13/26	23	48	52	0	New Construction - Initial	1/1/84
STATCB	4110	STATE COLLEGE BLVD	BASTANCHURY RD	MOUNTAIN RIDGE DR	B	5	AC	6	970	90	87,300	1/9/26	24	45	39	16	Crack Sealing - AC	3/1/11
COMMOA	1130	COMMONWEALTH AVE	SAN CARLOS DR	BALFOUR AVE	B	4	AC	4	797	60	47,820	4/27/26	25	33	23	44	New Construction - Initial	1/1/84
STATCB	4070	STATE COLLEGE BLVD	LARK ELLEN AVE	ROSALIA DR	B	5	AC	4	658	80	52,640	1/9/26	26	63	31	6	Crack Sealing - AC	3/1/11
COMMOA	1040	COMMONWEALTH AVE	ANIN AVE	HARRINGTON DR	B	3	AC	4	767	60	46,020	2/20/26	27	43	19	38	Crack Sealing - AC	4/1/10
STATCB	4120	STATE COLLEGE BLVD	MOUNTAIN RIDGE DR	VISTA DEL SOL	B	5	AC	6	1,011	66	66,726	1/9/26	27	59	35	6	Crack Sealing - AC	3/1/11
RAYMOA	3730	RAYMOND AVE	ORANGETHORPE AVE	BURTON ST	B	3	AC	5	1,592	60	95,520	5/18/26	28	47	18	35	New Construction - Initial	1/1/89
BASTAR	50300	BASTANCHURY RD	ST JUDE EMPLOYEE ENTERANCE	PVMT CHNGE (600' E/ ST JUDE)	B	5	AC	5	480	30	14,410	1/15/26	29	72	18	10	New Construction - Initial	1/1/80
STATCB	4080	STATE COLLEGE BLVD	ROSALIA DR	ROLLING HILLS DR	B	5	AC	5	500	80	40,000	1/9/26	29	53	36	11	Crack Sealing - AC	3/1/11
ACACIA	3780	ACACIA AVE	WILSHIRE AVE	COMMONWEALTH AVE	B	4	AC	4	738	60	44,280	4/7/26	29	28	49	23	New Construction - Initial	1/1/82
ACACIA	3770	ACACIA AVE	CHAPMAN AVE	WILSHIRE AVE	B	4	AC	3	553	60	33,180	4/7/26	35	35	53	12	New Construction - Initial	1/1/82
STATCB	4150	STATE COLLEGE BLVD	VISTA DEL ORO	YORBA LINDA BLVD	B	5	AC	6	938	80	75,040	1/9/26	36	51	40	9	Crack Sealing - AC	3/1/11
COMMOA	1080	COMMONWEALTH AVE	LADERA VISTA DR	LILLIE AVE	B	4	AC	4	474	60	28,440	2/20/26	36	66	27	7	Crack Sealing - AC	4/1/10
YORBLB	4450	YORBA LINDA BLVD	ASSOCIATED RD	OXFORD AVE	B	4	AC	6	550	80	44,000	12/30/25	37	69	31	0	New Construction - Initial	1/1/91
GILBES	2560	GILBERT ST	MOORE AVE	RAYMER AVE	B	8	AC	5	788	60	47,280	12/11/25	37	59	25	16	New Construction - Initial	1/1/86
YORBLB	4460	YORBA LINDA BLVD	OXFORD AVE	ORANGE FWY (57)	B	4	AC	6	957	67	64,119	12/30/25	37	49	51	0	New Construction - Initial	1/1/91
COMMOA	1030	COMMONWEALTH AVE	MONTAGUE AVE	ANIN AVE	B	3	AC	4	787	60	47,220	2/20/26	38	49	31	20	Crack Sealing - AC	4/1/10
COMMOA	1100	COMMONWEALTH AVE	LILLIE AVE	STATE COLLEGE BLVD	B	4	AC	4	487	60	29,220	4/27/26	38	31	64	5	Crack Sealing - AC	4/1/10
NUTWOA	4380	NUTWOOD AVE	COMMONWEALTH AVE	FOLINO DR	B	4	AC	6	532	66	35,112	5/16/26	38	65	17	18	New Construction - Initial	1/1/80
STATCB	4060	STATE COLLEGE BLVD	CHANGE IN PAVEMENT	LARK ELLEN AVE	B	5	AC	4	134	65	8,710	1/9/26	38	49	38	13	Crack Sealing - AC	3/1/11
CHAPMA	1380	CHAPMAN AVE	HARBOR BLVD	POMONA AVE	A	3	AAC	5	672	60	40,320	3/2/26	39	50	23	27	New Construction - Initial	5/1/00
BASTAR	1800	BASTANCHURY RD	PUENTE ST	BREA BLVD	B	6	AC	5	1,340	34	56,636	1/15/26	40	49	49	2	New Construction - Initial	1/1/97
BASTAR	50240	BASTANCHURY RD	THREEWOODS LN	BREA BLVD	B	5	AC	5	686	32	30,250	11/20/25	41	32	36	32	New Construction - Initial	1/1/97
RAYMOA	3690	RAYMOND AVE	ELM ST	KIMBERLY AVE	B	3	AC	5	375	60	22,500	4/27/26	41	37	24	39	New Construction - Initial	1/1/89
STATCB	4130	STATE COLLEGE BLVD	VISTA DEL SOL	VISTA DEL ORO	B	5	AC	6	787	80	62,960	1/9/26	42	58	38	4	Crack Sealing - AC	3/1/11
ROSECA	1990	ROSECRANS AVE	SUNNY RIDGE DR	LEGGETT LN	B	8	AC	4	660	80	52,800	5/15/26	42	19	50	31	New Construction - Initial	8/1/04
EUCLIS	2970	EUCLID ST	ORANGETHORPE AVE	BAKER AVE	B	2	AC	5	821	60	49,260	1/30/26	42	31	69	0	New Construction - UNSURFACED	10/1/11
ROSECA	2070	ROSECRANS AVE	CAMINO LA VISTA	CAMINO LOMA	B	8	AC	4	470	60	28,200	3/2/26	42	40	41	19	New Construction - Initial	1/1/80
VALEND	590	VALENCIA DR	EUCLID ST	WOODS AVE	B	2	AC	3	1,350	60	81,000	1/30/26	43	61	31	8	New Construction - Initial	1/1/82
MALVEA	1280	MALVERN AVE	EUCLID ST	CASA BLANCA DR	B	2	AC	5	238	60	14,280	3/2/26	43	69	31	0	New Construction - Initial	1/1/85
ACACIA	3830	ACACIA AVE	ROSSLYNN AVE	KIMBERLY AVE	B	4	AC	3	328	60	19,680	2/24/26	43	62	38	0	Cold Mill and Overlay	1/1/18
CHAPMA	1310	CHAPMAN AVE	WOODS AVE	DRAKE AVE	B	2	AC	4	731	60	43,860	3/2/26	43	71	29	0	New Construction - Initial	1/1/85
COMMOA	850	COMMONWEALTH AVE	DRAKE AVE	RICHMAN AVE	B	2	AC	4	681	52	35,412	2/6/26	44	53	44	3	New Construction - Initial	1/1/86
BASTAR	1770	BASTANCHURY RD	BALBOA RD	ST JUDE EMPLOYEE ENTERANCE	B	6	AC	5	590	33	24,475	12/19/25	44	43	57	0	New Construction - Initial	1/1/80
CHAPMA	1390	CHAPMAN AVE	POMONA AVE	LEMON ST	B	3	AAC	4	686	56	38,416	3/2/26	44	57	30	13	New Construction - Initial	5/1/00
BRADFA	4500	BRADFORD AVE	PALM DR	YORBA LINDA BLVD	B	4	AC	2	478	36	17,208	1/8/26	44	0	100	0	New Construction - Initial	1/1/80
CHAPMA	1370	CHAPMAN AVE	MALDEN AVE	HARBOR BLVD	B	2	AC	5	675	60	40,500	3/2/26	45	52	29	19	New Construction - Initial	1/1/85
ORANGA	240	ORANGETHORPE AVE	JEFFERSON AVE	WOODS AVE	B	2	AC	4	724	80	57,920	1/22/26	46	62	38	0	New Construction - Initial	1/1/84
MAGNOA	2370	MAGNOLIA AVE	ORANGETHORPE AVE	BRIDGE	B	1	AC	6	1,160	88	102,080	5/18/26	46	71	25	4	New Construction - Initial	1/1/99
NUTWOA	4390	NUTWOOD AVE	FOLINO DR	SB OFF RAMP	B	4	AC	4	488	75	36,600	1/8/26	46	56	44	0	New Construction - Initial	1/1/88
PARKSR	2710	PARKS RD	CONEJO LN	PIONEER AVE	B	8	AC	2	1,052	60	63,120	4/13/26	47	53	33	14	New Construction - Initial	1/1/80
CHAPMA	1420	CHAPMAN AVE	BALCOM AVE	BERKELEY AVE	B	3	AAC	5	389	60	23,340	2/24/26	47	49	51	0	New Construction - Initial	5/1/00
BASTAR	50230	BASTANCHURY RD	PAYNE STEWART DR	THREEWOODS LN	B	5	AC	5	586	32	20,085	11/20/25	47	53	37	10	New Construction - Initial	1/1/97
PLACEA	4670	PLACENTIA AVE	ARTS AVE	STARLING DR	B	4	AC	4	1,060	50	53,000	11/13/25	47	18	63	19	New Construction - Initial	1/1/80
DALEST	2200	DALE ST	WHITAKER ST	ASH AVE	B	1	AC	5	681	60	40,860	1/23/26	47	73	27	0	New Construction - Initial	1/1/80
ROSECA	2040	ROSECRANS AVE	SERRANO PL	PARKS RD	B	8	AC	4	690	60	41,400	5/4/26	47	59	30	11	New Construction - Initial	1/1/80
MALVEA	1220	MALVERN AVE	ADLENA DR	BASQUE AVE	B	7	AC	4	1,423	60	85,380	2/12/26	48	65	31	4	New Construction - Initial	1/1/81
HARBOB	3060	HARBOR BLVD	VALENCIA MESA DR	BREA BLVD	B	7	AC	6	3,970	80	317,600	11/6/25	48	62	36	2	New Construction - Initial	1/1/95
STATCB	4090	STATE COLLEGE BLVD	ROLLING HILLS DR	DELICATA DR	B	5	AC	4	1,153	66	76,098	1/9/26	48	37	48	15	Crack Sealing - AC	3/1/11
HARBOB	3310	HARBOR BLVD	ORANGETHORPE AVE	ORANGE FAIR MALL	B	3	AC	6	501	80	39,520	2/5/26	49	47	53	0	New Construction - Initial	7/1/07
CHAPMA	1350	CHAPMAN AVE	FORD AVE	HIGHLAND AVE	B	2	AC	4	674	60	40,440	3/2/26	49	74	26	0	New Construction - Initial	1/1/85
DALEST	2230	DALE ST	MONTANA AVE	AUTO CENTER DR	B	1	AC	5	830	60	49,800	1/23/26	49	64	23	13	New Construction - Initial	1/1/80
EUCLIS	2960	EUCLID ST	HILL AVE	ORANGETHORPE AVE	B	2	AAC	5	879	60	52,740	1/30/26	49	43	45	12	New Construction - Initial	5/7/01
LEMONS	3400	LEMON ST	WILSHIRE AVE	AMERIGE AVE	B	3	AC	5	365	60	21,900	2/5/26	50	60	40	0	New Construction - Initial	1/1/97
BASTAR	50280	BASTANCHURY RD	PVMT CHNGE (1200' E/ BALBOA RD)	BALBOA RD	B	5	AC	5	1,239	24	30,479	4/7/26	50	12	39	49	New Construction - Initial	1/1/80
PLACEA	4970	PLACENTIA AVE	W CROWTHER AVE	KIMBERLY AVE	B	4	AC	5	864	60	51,840	5/18/26	50	33	54	13	New Construction - Initial	1/1/70
HARBOB	3100	HARBOR BLVD	BERKELEY AVE	UNION AVE	B	3	AC	5	636	56	35,616	5/4/26	50	33	67	0	New Construction - UNSURFACED	6/1/10
GILBES	2430	GILBERT ST	COYOTE HILLS DR	ROSECRANS AVE	B	8	AC	4	562	60	33,720	4/13/26	50	30	32	38	New Construction - Initial	1/1/80
PLACEA	4930	PLACENTIA AVE	SANTA FE AVE	PAVEMENT CHANGE	B	4	AC	4	506	60	30,360	1/16/26	51	51	49	0	New Construction - Initial	1/1/70
LEMONS	3410	LEMON ST	AMERIGE AVE	COMMONWEALTH AVE	B	3	AC	5	379	60	22,740	2/5/26	51	62	38	0	New Construction - Initial	1/1/97
PLACEA	4980	PLACENTIA AVE	KIMBERLY AVE	ORANGETHORPE AVE	B	4	AC	5	1,297	60	77,820	5/18/26	51	46	27	27	New Construction - Initial	1/1/70
CHAPMA	1330	CHAPMAN AVE	DRAKE AVE	RICHMAN AVE	B	2	AC	4	652	60	39,120	4/24/26	51	72	22	6	New Construction - Initial	1/1/85

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
ORANGA	150	ORANGETHORPE AVE	BROOKHURST RD	PACIFIC DR	B	1	AC	5	785	80	62,800	5/16/26	51	43	48	9	New Construction - Initial	1/1/81
MALVEA	1210	MALVERN AVE	BASTANCHURY RD	ADLENA DR	B	7	AC	4	767	60	46,020	2/12/26	52	73	27	0	New Construction - Initial	1/1/81
VALEND	600	VALENCIA DR	WOODS AVE	RICHMAN AVE	B	2	AC	3	1,360	60	81,600	1/30/26	52	30	57	13	New Construction - Initial	1/1/80
BASTAR	1940	BASTANCHURY RD	CAMBRIDGE AVE	GILMAN CIR	B	4	AAC	5	307	80	24,560	11/13/25	52	0	100	0	New Construction - Initial	4/1/01
COMMOA	680	COMMONWEALTH AVE	THOMPSON AVE	PRITCHARD AVE	B	7	AC	5	396	60	23,760	5/16/26	52	58	41	1	New Construction - Initial	1/1/84
LEMONS	3390	LEMON ST	WHITING AVE	WILSHIRE AVE	B	3	AC	4	365	60	21,900	4/20/26	52	48	23	29	New Construction - Initial	1/1/97
MALVEA	1250	MALVERN AVE	BEVERLY DR	WESLEY AVE	B	7	AC	4	360	50	18,000	2/12/26	52	67	33	0	New Construction - Initial	1/1/96
MALVEA	1270	MALVERN AVE	BUENAVISTA DR	EUCLID ST	B	7	AC	4	322	50	16,100	2/12/26	52	64	36	0	New Construction - Initial	1/1/96
STATCB	4100	STATE COLLEGE BLVD	DELICATA DR	BASTANCHURY RD	B	5	AC	5	1,038	66	68,508	1/9/26	52	50	35	15	Crack Sealing - AC	3/1/11
COMMOA	930	COMMONWEALTH AVE	LAWRENCE AVE	BALCOM AVE	B	3	AC	4	655	68	44,540	2/6/26	52	38	62	0	Crack Sealing - AC	4/1/10
BASTAR	1910	BASTANCHURY RD	ASSOCIATED RD	DEREK DR	B	5	AAC	4	1,300	60	78,000	11/13/25	53	8	92	0	New Construction - Initial	4/1/01
CHAPMA	1360	CHAPMAN AVE	HIGHLAND AVE	MALDEN AVE	B	2	AC	4	662	60	39,720	3/2/26	53	66	33	1	New Construction - Initial	1/1/85
VALEND	4345	VALENCIA DR	RAYMOND AVE	ACACIA AVE	B	3	AC	3	1,190	60	71,400	4/7/26	53	43	53	4	New Construction - Initial	1/1/96
MALVEA	1300	MALVERN AVE	GLENWOOD DR	WOODS AVE	B	2	AC	4	835	60	50,100	4/24/26	53	43	24	33	New Construction - Initial	1/1/85
MAGNOA	2250	MAGNOLIA AVE	COMMONWEALTH AVE	VALENCIA DR	B	7	AAC	4	1,340	60	80,400	4/20/26	53	37	58	5	6 in overlay	8/1/09
BREABL	3960	BREA BLVD	CLEAR SPRINGS DR	HARBOR BLVD	B	5	AC	4	2,632	75	197,400	1/15/26	53	50	33	17	New Construction - Initial	1/1/89
COMMOA	670	COMMONWEALTH AVE	MAGNOLIA AVE	THOMPSON AVE	B	7	AAC	5	449	60	26,940	5/16/26	53	56	35	9	6 in overlay	4/27/10
DALEST	2220	DALE ST	FLOWER AVE	MONTANA AVE	B	1	AC	5	370	60	22,200	5/18/26	54	85	10	5	New Construction - Initial	1/1/80
ROSECA	2000	ROSECRANS AVE	LEGGETT LN	GILBERT ST	B	8	AC	4	742	80	59,360	4/13/26	54	22	63	15	New Construction - Initial	8/1/04
BASTAR	1920	BASTANCHURY RD	DEREK DR	HARTFORD AVE	B	4	AAC	4	1,850	60	111,000	11/13/25	54	0	100	0	New Construction - Initial	4/1/01
PLACEA	4920	PLACENTIA AVE	W CENTER ST	SANTA FE AVE	B	4	AC	5	536	60	32,160	1/16/26	54	43	39	18	New Construction - Initial	1/1/70
ROSECA	2060	ROSECRANS AVE	CAMINO REY	CAMINO LA VISTA	B	8	AC	4	1,048	60	62,880	10/22/25	54	61	27	12	New Construction - Initial	1/1/80
HARBOB	3120	HARBOR BLVD	UNION AVE	CHAPMAN AVE	B	3	AC	5	1,283	56	71,848	5/4/26	54	30	61	9	New Construction - Initial	3/19/12
MALVEA	1260	MALVERN AVE	WESLEY AVE	BUENA VISTA DR	B	7	AC	4	769	50	38,450	2/12/26	55	49	44	7	New Construction - Initial	1/1/96
EUCLIS	2920	EUCLID ST	VALENCIA DR	WINDFALL WY	B	2	AAC	5	1,048	60	62,880	1/30/26	55	51	49	0	New Construction - Initial	5/7/01
MALVEA	1240	MALVERN AVE	STEPHENS AVE	BEVERLY DR	B	7	AC	4	534	50	26,700	2/12/26	55	49	36	15	New Construction - Initial	1/1/96
MALVEA	1230	MALVERN AVE	BASQUE AVE	STEPHENS AVE	B	7	AC	4	667	50	33,350	5/16/26	55	65	30	5	New Construction - Initial	1/1/96
PLACEA	4770	PLACENTIA AVE	MONTESSORI AVE	CLAIRMONT AVE	B	4	AC	4	533	60	31,980	11/13/25	56	6	87	7	New Construction - Initial	5/14/02
BASTAR	1750	BASTANCHURY RD	LAGUNA RD	HARBOR BLVD	B	7	AC	6	606	76	46,056	12/18/25	56	59	41	0	New Construction - Initial	1/1/92
HARBOB	3330	HARBOR BLVD	ORANGEFAIR AVE	RIVERSIDE FWY (91)	B	3	AC	6	773	66	51,018	2/5/26	56	50	47	3	New Construction - Initial	7/1/07
PARKSR	2680	PARKS RD	ROSECRANS AVE	CONEJO LN	B	8	AC	2	708	60	42,480	4/13/26	56	59	29	12	New Construction - Initial	1/1/80
VALEND	4350	VALENCIA DR	ACACIA AVE	PVMT CHNGE (1550' E/ ACACIA AVE)	B	4	AC	3	1,548	60	92,880	4/7/26	56	33	63	4	New Construction - Initial	1/1/96
BASTAR	1870	BASTANCHURY RD	EXCELSA DR	HILLTOP CT	B	5	AC	4	372	80	29,760	11/13/25	56	18	82	0	New Construction - Initial	1/1/92
VALEND	4340	VALENCIA DR	RAYMOND AVE	SALLY PL	B	3	AC	3	1,421	60	85,260	4/7/26	56	33	63	4	New Construction - Initial	1/1/96
BASTAR	1930	BASTANCHURY RD	HARTFORD AVE	CAMBRIDGE AVE	B	4	AAC	5	269	80	21,520	11/13/25	56	0	100	0	New Construction - Initial	4/1/01
CHAPMA	1410	CHAPMAN AVE	NEWELL PL	BALCOM AVE	B	3	AAC	5	311	60	18,660	4/20/26	56	32	39	29	New Construction - Initial	5/1/00
HARBOB	3090	HARBOR BLVD	VALLEY VIEW DR	BERKELEY AVE	B	3	AC	5	743	66	49,038	5/4/26	56	60	29	11	New Construction - Initial	1/1/95
ORANGA	310	ORANGETHORPE AVE	RAYMOND AVE	MANHATTAN AVE	B	3	AC	6	1,338	80	107,040	1/22/26	56	35	37	28	New Construction - Initial	1/1/81
RAYMOA	3700	RAYMOND AVE	KIMBERLY AVE	ORANGETHORPE AVE	B	3	AC	5	1,290	60	77,400	4/27/26	56	42	35	23	New Construction - Initial	1/1/89
GILBES	2550	GILBERT ST	MALVERN AVE	MOORE AVE	B	8	AC	4	740	60	44,400	5/15/26	57	41	32	27	New Construction - Initial	1/1/86
BASTAR	1850	BASTANCHURY RD	ASHWOOD CIR	STATE COLLEGE BLVD	B	5	AC	5	3,045	33	113,945	5/18/26	57	28	63	9	New Construction - Initial	1/1/97
LEMONS	3510	LEMON ST	ORANGETHORPE AVE	ORANGEFAIR AVE	B	3	AC	5	1,153	60	69,180	2/5/26	57	27	55	18	New Construction - Initial	1/1/84
MALVEA	1290	MALVERN AVE	CASA BLANCA DR	GLENWOOD DR	B	2	AC	5	296	60	17,760	4/24/26	57	57	43	0	New Construction - Initial	1/1/85
BASTAR	50290	BASTANCHURY RD	BALBOA RD	HARBOR BLVD	B	5	AC	6	210	35	12,645	5/18/26	57	14	39	47	New Construction - Initial	1/1/80
COMMOA	630	COMMONWEALTH AVE	EDWARD AVE	MAGNOLIA AVE	B	7	AC	5	1,192	60	71,520	1/23/26	57	19	81	0	New Construction - AC	11/1/11
ORANGA	80	ORANGETHORPE AVE	PECKHAM ST	GILBERT ST	B	1	AC	5	833	80	66,640	5/18/26	58	69	22	9	New Construction - Initial	5/1/02
VALEND	380	VALENCIA DR	EDWARD AVE	MAGNOLIA AVE	B	7	AC	4	1,178	60	70,680	12/18/25	58	42	43	15	New Construction - Initial	1/1/77
NUTWOA	4360	NUTWOOD AVE	STATE COLLEGE BLVD	TITAN DR	B	4	AC	6	1,117	64	71,488	1/8/26	58	46	45	9	New Construction - Initial	1/1/88
CHAPMA	1340	CHAPMAN AVE	RICHMAN AVE	FORD AVE	B	2	AC	4	668	60	40,080	3/2/26	58	54	43	3	New Construction - Initial	1/1/85
BASTAR	1810	BASTANCHURY RD	BREA BLVD	THREEWOODS LN	B	5	AC	5	686	32	30,246	1/15/26	58	50	50	0	New Construction - Initial	1/1/97
COMMOA	830	COMMONWEALTH AVE	ROOSEVELT AVE	WOODS AVE	B	2	AC	4	1,002	52	52,104	4/20/26	58	23	50	27	New Construction - Initial	1/1/86
BASTAR	50270	BASTANCHURY RD	FAIRWAY ISLES DR	PVMT CHNGE (1200' E/ BALBOA RD)	B	5	AC	5	1,330	32	42,560	4/7/26	58	48	29	23	New Construction - Initial	1/1/80
COMMOA	900	COMMONWEALTH AVE	HARBOR BLVD	POMONA AVE	B	3	AC	5	683	72	49,176	5/15/26	58	43	39	18	New Construction - Initial	1/1/86
BREABL	3920	BREA BLVD	ASHBURN TER	PANORAMA RD	B	5	AC	4	1,931	70	135,170	4/13/26	58	35	34	31	New Construction - Initial	1/1/89
EUCLIS	2980	EUCLID ST	BAKER AVE	RIVERSIDE FWY (91)	B	2	AC	4	1,030	48	49,440	5/18/26	59	34	49	17	New Construction - UNSURFACED	10/1/11
GILBES	2541	GILBERT ST	HUGHES DR	WINDSONG WY	B	8	AC	5	321	60	19,260	12/11/25	59	36	32	32	New Construction - Initial	1/1/81
MADISA	4410	MADISON AVE	PLACENTIA AVE	E CITY LIMITS	B	4	AC	3	734	60	44,040	5/11/26	59	31	63	6	New Construction - Initial	1/1/80
BASTAR	50210	BASTANCHURY RD	STATE COLLEGE BLVD	ASHWOOD CIR	B	5	AC	5	3,045	33	116,606	5/11/26	59	42	39	19	New Construction - Initial	1/1/97
MALVEA	1200	MALVERN AVE	GILBERT AVE	BASTANCHURY RD	B	8	AC	4	2,932	60	175,920	2/12/26	59	79	21	0	New Construction - Initial	1/1/86
DALEST	2210	DALE ST	ASH AVE	FLOWER AVE	B	1	AC	4	570	60	34,200	1/23/26	60	63	26	11	New Construction - Initial	1/1/80
GILBES	2580	GILBERT ST	ARTESIA AVE	COMMONWEALTH AVE	B	7	AC	5	752	60	51,385	12/11/25	60	65	35	0	New Construction - Initial	1/1/80
COMMOA	910	COMMONWEALTH AVE	POMONA AVE	LEMON ST	B	3	AC	4	678	72	48,816	5/15/26	60	46	38	16	New Construction - Initial	1/1/86
BASTAR	1900	BASTANCHURY RD	MOUNTAIN RIDGE DR	ASSOCIATED RD	B	5	AC	5	365	80	29,200	11/13/25	60	24	76	0	New Construction - Initial	1/1/92
COMMOA	690	COMMONWEALTH AVE	PRITCHARD AVE	JENSEN WY	B	7	AAC	5	768	60	46,080	4/20/26	60	44	55	1	Overlay - AC Structural	8/1/22
HARBOB	3300	HARBOR BLVD	HILL AVE	ORANGETHORPE AVE	B	3	AAC	5	570	78	44,460	2/5/26	60	51	49	0	New Construction - Initial	5/1/02
LEMONS	3380	LEMON ST	CHAPMAN AVE	WHITING AVE	B	3	AC	5	213	60	12,780	4/20/26	60	66	28	6	New Construction - Initial	1/1/80
STATCB	4320	STATE COLLEGE BLVD	CYPRESS WY	ORANGETHORPE AVE	B	4	AC	4	545	60	32,700	2/23/26	60	28	55	17	Complete Reconstruction - AC	1/1/18
BASTAR	1860	BASTANCHURY RD	STATE COLLEGE BLVD	EXCELSA DR	B	5	AC	5	636	80	50,880	11/13/25	61	13	87	0	New Construction - Initial	1/1/92
COMMOA	1070	COMMONWEALTH AVE	MOUNTAIN VIEW PL	LADERA VISTA DR	B	4	AC	4	658	60	39,480	2/20/26	61	56	44	0	Crack Sealing - AC	4/1/10
CHAPMA	1400	CHAPMAN AVE	LEMON ST	NEWELL PL	B	3	AAC	5	1,004	60	60,240	5/15/26	61	59	28	13	New Construction - Initial	5/1/00
ACACIA	3820	ACACIA AVE	VALENCIA DR	ROSSLYNN AVE	B	4	AC	3	1,037	60	62,220	2/24/26	61	59	41	0	Cold Mill and Overlay	1/1/18
BASTAR	1820	BASTANCHURY RD	THREEWOODS LN	PAYNE STEWART DR	B	5	AC	5	538	32	26,877	1/15/26	62	57	43	0	New Construction - Initial	1/1/97

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
PLACEA	4840	PLACENTIA AVE	QUARTZ LN	MADISON AVE	B	4	AAC	4	834	60	50,040	1/16/26	62	4	81	15	6 in overlay	8/1/09
ROSECA	2050	ROSECRANS AVE	PARKS RD	CAMINO REY	B	8	AC	5	539	60	32,340	5/4/26	62	33	47	20	New Construction - Initial	1/1/80
COMMOA	730	COMMONWEALTH AVE	LLOYD AVE	BROOKHURST RD	B	7	AC	5	1,122	60	67,320	4/20/26	62	0	93	7	New Construction - Initial	1/1/84
HARBOB	3320	HARBOR BLVD	ORANGE FAIR MALL	ORANGEFAIR AVE	B	3	AC	6	599	80	42,190	2/5/26	62	30	70	0	New Construction - Initial	1/1/80
MAGNOA	2280	MAGNOLIA AVE	VALENCIA DR	FLOWER AVE	B	1	AAC	5	1,203	60	72,180	4/20/26	62	22	68	10	6 in overlay	8/1/09
PLACEA	4680	PLACENTIA AVE	STARLING DR	ROLLING HILLS DR	B	4	AC	4	1,229	50	61,450	5/11/26	62	0	74	26	New Construction - Initial	1/1/80
BASTAR	1830	BASTANCHURY RD	PAYNE STEWART DR	ASHWOOD CIR	B	5	AC	5	1,085	33	42,993	5/18/26	62	20	60	20	New Construction - Initial	1/1/97
ROSECA	2010	ROSECRANS AVE	GILBERT ST	CANYON DR	B	8	AC	4	1,681	60	100,860	4/13/26	62	0	97	3	Reconstruct Surface (AC)	7/1/12
BERKEA	3570	BERKELEY AVE	BROOKDALE PL	CHAPMAN AVE	B	3	AC	3	975	60	58,500	12/26/25	62	21	79	0	New Construction - Initial	1/1/80
COMMOA	1060	COMMONWEALTH AVE	ACACIA AVE	MOUNTAIN VIEW PL	B	4	AC	4	808	60	48,480	2/20/26	63	47	30	23	Crack Sealing - AC	4/1/10
ORANGA	320	ORANGETHORPE AVE	MANHATTAN AVE	ACACIA AVE	B	3	AC	6	1,314	80	105,120	1/22/26	63	53	43	4	New Construction - Initial	1/1/81
COMMOA	840	COMMONWEALTH AVE	WOODS AVE	DRAKE AVE	B	2	AC	4	688	60	41,280	4/20/26	63	26	36	38	New Construction - Initial	1/1/86
DALEST	2160	DALE ST	ARTESIA AVE	COMMONWEALTH AVE	B	7	AC	4	1,440	60	86,400	5/18/26	63	37	63	0	New Construction - Initial	1/1/80
BASTAR	1710	BASTANCHURY RD	BASTANCHURY PL	EUCLID ST	B	8	AAC	4	2,180	66	143,880	4/13/26	63	25	75	0	New Construction - Initial	5/1/02
LEMONS	3500	LEMON ST	LIBERTY AVE	ORANGETHORPE AVE	B	3	AAC	5	547	60	32,820	2/5/26	63	5	94	1	6 in overlay	8/1/08
ORANGA	180	ORANGETHORPE AVE	BASQUE AVE	ORCHARD AVE	B	1	AAC	4	937	80	74,960	4/27/26	63	10	90	0	Surface Treatment - Slurry Seal	7/1/12
COMMOA	890	COMMONWEALTH AVE	MALDEN AVE	HARBOR BLVD	B	2	AC	5	667	75	50,025	4/20/26	63	40	49	11	New Construction - Initial	1/1/86
ORANGA	220	ORANGETHORPE AVE	EUCLID ST	JEFFERSON AVE	B	2	AC	4	769	80	61,520	4/27/26	63	65	20	15	New Construction - Initial	1/1/81
PLACEA	4910	PLACENTIA AVE	CHAPMAN AVE	W CENTER ST	B	4	AC	5	486	65	31,590	1/16/26	63	60	40	0	New Construction - Initial	1/1/70
COMMOA	870	COMMONWEALTH AVE	LIBRARY LN	HIGHLAND AVE	B	2	AC	5	829	70	58,030	2/6/26	63	38	62	0	MILL and OVERLAY	7/1/12
LEMONS	3530	LEMON ST	ORANGEFAIR AVE	RIVERSIDE FWY (91)	B	3	AC	4	700	65	45,500	5/18/26	63	50	40	10	New Construction - Initial	1/1/99
ACACIA	3790	ACACIA AVE	COMMONWEALTH AVE	WALNUT AV	B	4	AC	3	719	60	43,140	4/7/26	64	52	34	14	Cold Mill and Overlay	1/1/18
BASTAR	1890	BASTANCHURY RD	HOLLYOAK DR	MOUNTAIN RIDGE DR	B	5	AC	4	146	60	8,760	11/13/25	64	11	89	0	New Construction - Initial	1/1/92
PLACEA	4850	PLACENTIA AVE	MADISON AVE	RUBY DR	B	4	AAC	4	934	60	56,040	1/16/26	64	17	72	11	6 in overlay	8/1/09
HARBOB	3080	HARBOR BLVD	BREA BLVD	VALLEY VIEW DR	B	5	AC	5	685	60	41,100	5/4/26	64	47	40	13	New Construction - Initial	1/1/95
ACACIA	3810	ACACIA AVE	WALNUT AVE	VALENCIA DR	B	4	AC	3	565	60	33,900	4/7/26	65	45	54	1	Cold Mill and Overlay	1/1/18
GILBES	2543	GILBERT ST	BRAMBLE WY	MALVERN AVE	B	8	AC	5	619	60	37,140	12/11/25	65	64	36	0	New Construction - Initial	1/1/81
PLACEA	4690	PLACENTIA AVE	ROLLING HILLS DR	MONTESSORI AVE	B	4	AC	4	554	60	33,240	11/13/25	65	12	88	0	New Construction - Initial	5/1/02
GILBES	2570	GILBERT ST	RAYMER AVE	PCC N/ ARTESIA AVE	B	8	AAC	4	295	60	18,245	4/13/26	65	62	38	0	New Construction - Initial	1/1/80
PARKSR	2730	PARKS RD	RR TRACKS S/ PEACOCK LN	BASTANCHURY RD	B	8	AC	2	280	58	16,240	5/11/26	65	0	66	34	New Construction - Initial	1/1/80
PLACEA	4830	PLACENTIA AVE	GARNET LN	QUARTZ LN	B	4	AAC	4	681	60	40,860	1/16/26	65	22	70	8	6 in overlay	3/1/08
ACACIA	3840	ACACIA AVE	KIMBERLY AVE	ORANGETHORPE AVE	B	4	AC	3	1,314	60	78,840	2/24/26	65	39	61	0	Cold Mill and Overlay	1/1/18
LEMONS	3430	LEMON ST	SANTA FE AVE	WALNUT WAY	B	3	PCC	4	736	48	35,328	3/3/26	65	73	21	6	New Construction - Initial	1/1/75
ORANGA	50	ORANGETHORPE AVE	VINE AVE	A ST	B	1	AC	5	591	80	47,280	1/22/26	65	27	55	18	New Construction - Initial	1/1/84
PLACEA	4940	PLACENTIA AVE	PAVEMENT CHANGE	PCC	B	4	AC	5	818	60	49,080	1/16/26	65	37	33	30	New Construction - Initial	1/1/70
COMMOA	720	COMMONWEALTH AVE	GILBERT AVE	LLOYD AVE	B	7	AC	5	1,545	60	92,700	4/20/26	66	4	96	0	New Construction - Initial	1/1/84
MALVEA	1180	MALVERN AVE	BURNING TREE RD	SUNNY RIDGE DR	B	8	AC	4	1,264	76	96,064	5/16/26	66	51	41	8	New Construction - Initial	1/1/86
ORANGA	190	ORANGETHORPE AVE	ORCHARD AVE	CITRUS AVE	B	1	AC	4	752	80	60,160	4/27/26	66	6	94	0	Surface Treatment - Slurry Seal	7/1/12
ORANGA	40	ORANGETHORPE AVE	MAGNOLIA AVE	VINE AVE	B	1	AC	5	567	80	45,360	5/18/26	66	43	53	4	New Construction - Initial	5/1/02
ORANGA	120	ORANGETHORPE AVE	COURTNEY AVE	BROOKHURST ST	B	1	AC	5	1,317	80	105,360	1/22/26	66	39	61	0	Surface Treatment - Slurry Seal	7/1/12
BASTAR	1660	BASTANCHURY RD	ADLENA PL	VALLEY VIEW DR	B	8	AC	4	1,650	60	99,000	4/13/26	66	36	61	3	New Construction - Initial	10/1/07
VALEND	370	VALENCIA DR	MEADE AVE	EDWARD AVE	B	7	AC	4	683	60	40,980	12/18/25	66	39	49	12	New Construction - Initial	1/1/77
COMMOA	820	COMMONWEALTH AVE	EUCLID ST	ROOSEVELT AVE	B	2	AC	5	333	52	17,316	5/16/26	66	0	100	0	New Construction - Initial	1/1/86
COMMOA	770	COMMONWEALTH AVE	BASQUE AVE	ORCHARD AVE	B	7	AC	4	1,007	52	52,364	4/24/26	66	0	100	0	New Construction - Initial	1/1/86
COMMOA	800	COMMONWEALTH AVE	WILLIAMSON AVE	ORANGE AVE	B	7	AC	4	651	60	39,060	5/16/26	66	11	85	4	New Construction - Initial	1/1/86
COMMOA	860	COMMONWEALTH AVE	RICHMAN AVE	LIBRARY LN	B	2	AC	5	495	70	34,650	4/20/26	66	30	39	31	New Construction - Initial	1/1/86
ACACIA	3800	ACACIA AVE	WALNUT AVE	WALNUT AVE	B	4	AC	3	85	60	5,100	2/23/26	66	62	38	0	Cold Mill and Overlay	1/1/18
CHAPMA	1500	CHAPMAN AVE	RAYMOND AVE	VICTORIA DR	B	3	AC	5	802	60	48,120	5/15/26	66	46	37	17	New Construction - Initial	1/1/94
BASTAR	1880	BASTANCHURY RD	HILLTOP CT	MOUNTAIN RIDGE DR	B	5	AC	4	950	80	76,000	11/13/25	66	14	86	0	New Construction - Initial	1/1/92
NUTWOA	4370	NUTWOOD AVE	TITAN DR	COMMONWEALTH AVE	B	4	AC	6	526	64	33,664	1/8/26	66	0	62	38	New Construction - Initial	1/1/88
BERKEA	3540	BERKELEY AVE	HARBOR BLVD	LEMON ST	B	3	AC	4	1,343	60	80,580	12/26/25	66	19	80	1	MILL and OVERLAY	7/1/13
BERKEA	3550	BERKELEY AVE	LEMON ST	HORNET WY	B	3	AC	3	1,435	60	86,100	12/26/25	67	10	57	33	New Construction - Initial	1/1/80
COMMOA	810	COMMONWEALTH AVE	ORANGE AVE	EUCLID ST	B	7	AC	5	333	56	18,648	5/16/26	67	16	84	0	New Construction - Initial	1/1/86
MAGNOA	2330	MAGNOLIA AVE	FLOWER AVE	ORANGETHORPE AVE	B	1	AC	4	1,474	60	88,440	5/16/26	67	26	69	5	MILL and OVERLAY	7/1/13
BREABL	3930	BREA BLVD	PANORAMA RD	BARBARA BLVD	B	5	AC	4	777	80	62,160	1/15/26	67	40	39	21	New Construction - Initial	1/1/89
EUCLIS	2950	EUCLID ST	WINDFALL WY	HILL AVE	B	2	AAC	5	676	60	40,560	1/30/26	67	56	35	9	New Construction - Initial	5/7/01
PLACEA	4710	PLACENTIA AVE	CLAIRMONT AVE	MYSTIC AVE	B	4	AC	4	800	60	48,000	5/15/26	67	6	76	18	New Construction - Initial	5/13/02
STATCB	4300	STATE COLLEGE BLVD	END PCC S/ VALENCIA	KIMBERLY AVE	B	4	AC	5	1,108	80	93,432	5/18/26	67	55	45	0	Complete Reconstruction - AC	1/1/18
ORANGA	100	ORANGETHORPE AVE	GILBERT ST	COURTNEY AVE	B	1	AC	5	1,309	80	74,880	5/18/26	67	34	62	4	Surface Treatment - Slurry Seal	7/1/12
ORANGA	160	ORANGETHORPE AVE	PACIFIC DR	EADINGTON AVE	B	1	AC	4	1,064	80	85,120	4/27/26	67	34	61	5	Surface Treatment - Slurry Seal	7/1/12
RAYMOA	3610	RAYMOND AVE	COMMONWEALTH AVE	WALNUT AVE	B	3	AC	5	750	60	45,225	4/27/26	67	28	59	13	Complete Reconstruction - AC	1/1/18
CHAPMA	1540	CHAPMAN AVE	HARRINGTON DR	ACACIA AVE	B	3	AAC	5	467	60	28,020	5/16/26	67	68	26	6	6 in overlay	8/1/09
COMMOA	710	COMMONWEALTH AVE	JENSEN WY	GILBERT AVE	B	7	AC	4	867	60	52,020	4/20/26	67	27	73	0	New Construction - Initial	1/1/84
GILBES	2490	GILBERT ST	CONEJO LN	LOMA ALTA DR	B	8	AC	5	638	60	38,280	12/11/25	67	44	55	1	New Construction - Initial	1/1/87
BASTAR	1760	BASTANCHURY RD	HARBOR BLVD	BALBOA RD	B	7	AC	6	237	30	7,740	12/19/25	67	56	44	0	New Construction - Initial	1/1/80
COMMOA	620	COMMONWEALTH AVE	DALE ST	EDWARD AVE	B	7	AC	5	1,456	60	87,360	1/23/26	68	8	88	4	New Construction - AC	11/1/11
CHAPMA	1490	CHAPMAN AVE	STANFORD AVE	RAYMOND AVE	B	3	AC	4	501	60	30,060	4/7/26	68	19	79	2	New Construction - Initial	1/1/80
BASTAR	50260	BASTANCHURY RD	PUENTE ST	FAIRWAY ISLES DR	B	5	AC	5	2,235	33	82,300	4/7/26	68	57	23	20	New Construction - Initial	1/1/80
EUCLIS	2740	EUCLID ST	N CITY LIMITS	LA SENDA DR	B	8	ACT	5	1,981	80	158,480	10/30/25	68	32	60	8	New Construction - Initial	1/1/90
PLACEA	4960	PLACENTIA AVE	PCC	W CROWTHER AVE	B	4	AC	5	483	60	28,980	5/18/26	68	12	82	6	New Construction - Initial	1/1/70
RAYMOA	3672	RAYMOND AVE	END PCC 50' S/ ASH AVE (N)	ASH AVE (S)	B	3	AC	2	160	25	5,040	4/27/26	68	0	100	0	New Construction - Initial	1/1/80
CHAPMA	1470	CHAPMAN AVE	LINCOLN AVE	CORNELL AVE	B	3	AC	5	270	60	16,200	5/15/26	68	32	68	0	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
BASTAR	1700	BASTANCHURY RD	PARKS RD	BASTANCHURY PL	B	8	AC	6	216	80	17,280	5/11/26	68	6	92	2	New Construction - Initial	5/1/02
ORANGA	60	ORANGETHORPE AVE	A ST	PECKHAM ST	B	1	AC	5	544	80	43,520	1/22/26	68	22	66	12	New Construction - Initial	1/1/84
STATCB	4330	STATE COLLEGE BLVD	ORANGETHORPE AVE	CARBON CREEK CHANNEL	B	4	AC	5	633	81	51,273	5/18/26	68	23	77	0	Complete Reconstruction - AC	1/1/18
BASTAR	1640	BASTANCHURY RD	MALVERN AVE	HILLSBORO PL	B	8	AC	5	773	60	46,380	5/16/26	68	46	32	22	New Construction - Initial	10/1/07
COMMOA	920	COMMONWEALTH AVE	LEMON ST	LAWRENCE AVE	B	3	AC	4	655	60	39,300	4/20/26	68	18	61	21	New Construction - Initial	1/1/86
BASTAR	50250	BASTANCHURY RD	CCPUENTE ST	CCBREA BLVD	B	5	AC	5	1,340	34	51,475	4/7/26	69	45	21	34	New Construction - Initial	1/1/97
BREABL	3910	BREA BLVD	BASTANCHURY RD	ASHBURN TER	B	6	AC	4	1,498	70	104,860	4/13/26	69	32	58	10	New Construction - Initial	1/1/89
BREABL	3940	BREA BLVD	BARBARA BLVD	LONGVIEW DR	B	5	AC	4	844	80	67,520	1/15/26	69	34	66	0	New Construction - Initial	1/1/89
LEMONS	3480	LEMON ST	ASH DR	FREEDOM AVE	B	3	AC	4	979	60	58,740	2/5/26	69	67	28	5	New Construction - Initial	5/7/00
DALEST	2180	DALE ST	COMMONWEALTH AVE	WHITAKER ST	B	7	AC	5	1,316	60	78,960	1/23/26	69	25	73	2	New Construction - Initial	1/1/80
PLACEA	4890	PLACENTIA AVE	HARMONY LN	SUNSET DR	B	4	AC	5	527	60	31,620	5/18/26	69	0	100	0	New Construction - Initial	1/1/70
YORBLB	4490	YORBA LINDA BLVD	SAPPHIRE RD	BRADFORD AVE	B	4	AC	6	1,327	60	79,620	1/8/26	69	30	62	8	New Construction - Initial	1/1/82
ROSECA	2020	ROSECRANS AVE	CANYON DR	CAMINO CENTROLOMA	B	8	AC	4	1,189	60	71,340	4/13/26	69	15	78	7	New Construction - Initial	1/1/80
STATCB	4220	STATE COLLEGE BLVD	CHAPMAN AVE	REVERE AVE	B	4	AC	5	877	64	56,128	2/23/26	69	24	56	20	New Construction - Initial	1/1/97
HARBOB	3030	HARBOR BLVD	HERMOSA DR	LA ENTRADA PL	B	6	AAC	4	1,024	80	81,920	12/19/25	70	53	25	22	New Construction - Initial	5/7/01
HARBOB	3240	HARBOR BLVD	VALENCIA DR	ASH AVE	B	3	AC	5	374	60	22,440	4/27/26	70	53	38	9	New Construction - Initial	5/1/02
LEMONS	3490	LEMON ST	FREEDOM AVE	LIBERTY AVE	B	3	AAC	5	561	60	33,660	2/5/26	70	18	82	0	6 in overlay	8/1/08
MALVEA	1190	MALVERN AVE	SUNNY RIDGE DR	GILBERT AVE	B	8	AC	5	566	79	44,714	5/16/26	70	31	64	5	New Construction - Initial	1/1/86
STATCB	4200	STATE COLLEGE BLVD	DOROTHY LN	NUTWOOD AVE	B	4	AC	6	1,383	79	109,257	12/30/25	70	29	71	0	Crack Sealing - AC	3/1/11
COMMOA	780	COMMONWEALTH AVE	ORCHARD AVE	CITRUS AVE	B	7	AC	4	325	52	16,900	4/24/26	70	0	100	0	New Construction - Initial	1/1/84
COMMOA	880	COMMONWEALTH AVE	HIGHLAND AVE	MALDEN AVE	B	2	AC	5	664	72	47,808	4/20/26	70	6	68	26	New Construction - Initial	1/1/86
STATCB	4310	STATE COLLEGE BLVD	KIMBERLY AVE	CYPRESS WY	B	4	AC	5	707	65	45,955	5/18/26	70	15	85	0	Complete Reconstruction - AC	1/1/18
YORBLB	4440	YORBA LINDA BLVD	ALMIRA AVE	ASSOCIATED RD	B	4	AC	6	653	80	52,240	12/30/25	70	49	51	0	New Construction - Initial	1/1/91
CHAPMA	1440	CHAPMAN AVE	PRINCETON AVE	YALE AV	B	3	AC	5	401	60	24,060	4/20/26	70	3	97	0	New Construction - Initial	1/1/80
RAYMOA	3640	RAYMOND AVE	WALNUT AVE	PCC 365' S/ WALNUT AVE	B	3	AC	5	367	25	9,875	4/27/26	70	0	100	0	Complete Reconstruction - AC	1/1/18
MALVEA	1170	MALVERN AVE	W CITY LIMITS	BURNING TREE RD	B	8	AC	4	991	76	75,316	4/13/26	70	30	69	1	New Construction - Initial	1/1/86
CHAPMA	1430	CHAPMAN AVE	BERKELEY AVE	PRINCETON AVE	B	3	AAC	5	340	60	20,400	5/16/26	70	0	100	0	New Construction - Initial	5/1/00
COMMOA	790	COMMONWEALTH AVE	CITRUS AVE	WILLIAMSON AVE	B	7	AC	4	344	52	17,888	5/16/26	70	0	100	0	New Construction - Initial	1/1/86
BERKEA	3560	BERKELEY AVE	HORNET WY	BROOKDALE PL	B	3	AC	3	1,158	60	69,480	4/13/26	71	11	89	0	New Construction - Initial	1/1/80
EUCLIS	2760	EUCLID ST	LAKEVIEW DR	LAGUNA RD	B	8	AC	4	1,269	80	101,520	4/13/26	71	49	46	5	New Construction - Initial	1/1/90
EUCLIS	2750	EUCLID ST	LA SENDA DR	LAKEVIEW DR	B	8	AC	4	959	80	76,720	4/13/26	71	69	31	0	New Construction - Initial	1/1/90
CHAPMA	1480	CHAPMAN AVE	CORNELL AVE	STANFORD AVE	B	3	AAC	5	388	60	23,280	5/15/26	71	11	85	4	New Construction - Initial	5/1/00
HARBOB	3040	HARBOR BLVD	LA ENTRADA PL	BASTANCHURY RD	B	6	AAC	5	4,074	80	325,920	12/19/25	71	72	28	0	New Construction - Initial	5/7/01
GILBES	2542	GILBERT ST	WINDSONG WY	BRAMBLE WY	B	8	AC	5	1,003	60	60,180	12/11/25	72	42	58	0	New Construction - Initial	1/1/81
BROOKR	2640	BROOKHURST RD	ORANGETHORPE AVE	ROBERTA AVE	B	1	AC	5	1,104	60	66,240	12/12/25	72	80	20	0	New Construction - AC	10/1/10
BREABL	3950	BREA BLVD	LONGVIEW DR	CLEAR SPRINGS DR	B	5	AC	4	256	80	20,480	1/15/26	72	39	54	7	New Construction - Initial	1/1/89
GILBES	2460	GILBERT ST	VIA INGRESO	LOMA VERDE DR	B	8	AC	5	640	60	38,400	12/11/25	72	37	63	0	New Construction - Initial	1/1/87
ORANGA	210	ORANGETHORPE AVE	CITRUS AVE	EUCLID ST	B	1	AC	5	785	80	62,800	4/27/26	72	17	76	7	New Construction - Initial	1/1/81
PLACEA	4810	PLACENTIA AVE	YORBA LINDA BLVD	TOPAZ LN	B	4	AAC	5	882	60	52,920	1/16/26	72	10	69	21	6 in overlay	3/1/08
EUCLIS	2770	EUCLID ST	LAGUNA RD	LAGUNA TER	B	8	AC	4	2,291	80	183,280	10/30/25	72	40	60	0	New Construction - Initial	1/1/90
GILBES	2515	GILBERT ST	PIONEER AVE	DAPHNE PL	B	8	AC	5	655	60	39,300	12/11/25	72	38	62	0	New Construction - Initial	1/1/80
BASTAR	50220	BASTANCHURY RD	ASHWOOD CIR	PAYNE STEWART DR	B	5	AC	5	1,085	32	40,625	5/18/26	73	10	71	19	New Construction - Initial	1/1/97
BREABL	3870	BREA BLVD	N CITY LIMITS	SAN ANTONIO AVE	B	6	AAC	5	800	75	60,000	4/7/26	73	52	36	12	Overlay - AC Structural	5/25/20
COMMOA	740	COMMONWEALTH AVE	BROOKHURST RD	PCC W/ BRIDGE	B	7	AC	4	925	60	48,276	5/16/26	73	11	89	0	New Construction - Initial	1/1/80
PLACEA	4800	PLACENTIA AVE	MACADAMIA LN	YORBA LINDA BLVD	B	4	AC	5	577	60	34,620	12/30/25	74	61	33	6	New Construction - Initial	5/7/01
COMMOA	1160	COMMONWEALTH AVE	COLLEGE PL	NUTWOOD AVE	B	4	AC	4	871	65	56,615	1/8/26	74	6	48	46	New Construction - Initial	5/1/02
VALEND	4355	VALENCIA DR	PVMT CHNGE (1550' E/ ACACIA AVE)	PCC W/ STATE COLLEGE BLVD	B	4	AC	3	650	60	37,650	4/7/26	74	57	43	0	New Construction - Initial	1/1/96
CHAPMA	1510	CHAPMAN AVE	VICTORIA DR	HART PL	B	3	AAC	5	563	60	33,780	5/15/26	74	0	75	25	6 in overlay	8/1/09
BASTAR	1650	BASTANCHURY RD	HILLSBORO PL	ADLENA PL	B	8	AC	5	256	60	15,360	5/16/26	74	36	64	0	New Construction - Initial	10/1/07
GILBES	2440	GILBERT ST	ROSECRANS AVE	EL RANCHO VISTA	B	8	AC	5	500	80	40,000	4/13/26	74	0	76	24	New Construction - Initial	1/1/87
EUCLIS	2780	EUCLID ST	LAGUNA TER	ROSECRANS AVE	B	8	AC	5	584	80	46,720	5/15/26	74	47	29	24	New Construction - Initial	1/1/90
GILBES	2470	GILBERT ST	LOMA VERDE DR	VIA MIRADA	B	8	ABR	5	234	60	14,040	12/11/25	74	26	74	0	New Construction - Initial	1/1/80
GILBES	2500	GILBERT ST	LOMA ALTA DR	PIONEER AVE	B	8	AC	5	307	60	18,420	4/13/26	75	44	53	3	New Construction - Initial	1/1/87
HARBOB	3020	HARBOR BLVD	LAS PALMAS DR	HERMOSA DR	B	6	AAC	4	961	64	61,504	12/19/25	75	57	43	0	New Construction - Initial	5/7/01
BASTAR	1670	BASTANCHURY RD	VALLEY VIEW DR	VALENCIA MESA DR	B	8	AC	5	378	60	22,680	5/11/26	75	12	62	26	New Construction - Initial	10/1/07
HARBOB	3270	HARBOR BLVD	ROSSLYNN AVE	HILL AVE	B	3	AAC	5	893	60	53,580	1/30/26	75	37	63	0	New Construction - Initial	5/1/02
LAMBER	3970	LAMBERT RD	HARBOR BLVD	PALM ST	B	6	AC	3	2,582	30	77,460	12/11/25	75	56	44	0	Complete Reconstruction - AC	6/1/18
ORANGA	20	ORANGETHORPE AVE	I-5 BRIDGE	PAVEMENT CHANGE	B	1	AC	6	940	80	75,200	1/22/26	76	26	74	0	New Construction - Initial	1/1/84
RAYMOA	3665	RAYMOND AVE	END PCC 300' N/ ASH AVE	PCC 160' N/ ASH	B	3	AC	5	146	25	4,605	4/27/26	76	0	100	0	Complete Reconstruction - AC	1/1/18
RAYMOA	3680	RAYMOND AVE	ASH AVE	ELM ST	B	3	AC	5	349	60	20,940	4/27/26	76	11	89	0	Complete Reconstruction - AC	1/1/18
YORBLB	4430	YORBA LINDA BLVD	STATE COLLEGE BLVD	ALMIRA AVE	B	4	AC	6	789	80	63,120	12/30/25	76	40	60	0	New Construction - Initial	1/1/91
BASTAR	1680	BASTANCHURY RD	VALENCIA MESA DR	PARKS RD	B	8	AC	4	1,170	60	70,200	4/13/26	76	12	82	6	New Construction - Initial	10/1/07
YORBLB	4480	YORBA LINDA BLVD	PLACENTIA AVE	SAPPHIRE RD	B	4	AC	6	1,395	60	83,700	5/11/26	76	4	74	22	New Construction - Initial	1/1/91
CHAPMA	1450	CHAPMAN AVE	YALE AVE	YALE AVE	B	3	AAC	5	109	60	6,540	5/15/26	76	0	99	1	New Construction - Initial	5/1/00
CHAPMA	1530	CHAPMAN AVE	ANNIN AVE	HARRINGTON DR	B	3	AAC	4	556	60	33,360	5/15/26	76	15	83	2	6 in overlay	8/1/09
PLACEA	4870	PLACENTIA AVE	RUBY DR	NUTWOOD AVE	B	4	AC	5	668	60	40,080	5/18/26	77	0	68	32	New Construction - Initial	1/1/70
CHAPMA	1460	CHAPMAN AVE	YALE AVE	LINCOLN AVE	B	3	AAC	5	216	60	12,960	5/15/26	77	0	100	0	New Construction - Initial	5/1/00
STATCB	4260	STATE COLLEGE BLVD	COMMONWEALTH AVE	WALNUT AVE	B	4	AC	5	660	60	40,100	2/23/26	77	64	36	0	Complete Reconstruction - AC	1/1/18
LEMONS	3440	LEMON ST	WALNUT WAY	VALENCIA DR	B	3	AC	4	392	60	23,520	2/5/26	77	57	43	0	New Construction - Initial	1/1/75
STATCB	4050	STATE COLLEGE BLVD	N CITY LIMITS	CHANGE IN PAVEMENT	B	5	AC	4	545	65	35,425	1/9/26	77	49	51	0	Crack Sealing - AC	3/1/11
CHAPMA	1580	CHAPMAN AVE	LADERA VISTA DR	STATE COLLEGE BLVD	B	4	AC	5	1,246	60	74,760	5/15/26	77	60	27	13	Cold Mill and Overlay	6/1/18
STATCB	4170	STATE COLLEGE BLVD	YORBA LINDA BLVD	RANCH RD	B	5	AC	5	1,228	80	98,240	12/30/25	77	12	88	0	Crack Sealing - AC	3/1/11

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
VALEND	350	VALENCIA DR	DALE ST	MEADE AVE	B	7	AC	4	780	60	46,800	12/18/25	77	0	100	0	New Construction - Initial	1/1/77
COMMOA	1150	COMMONWEALTH AVE	CHAPMAN AVE	COLLEGE PL	B	4	AC	4	515	60	30,900	1/8/26	78	23	50	27	New Construction - Initial	5/1/02
GILBES	2480	GILBERT ST	VIA MIRADA	CONEJO LN	A	8	AC	5	343	60	20,580	12/11/25	78	15	71	14	New Construction - Initial	1/1/80
PLACEA	4880	PLACENTIA AVE	NUTWOOD AVE	HARMONY LN	B	4	AC	5	670	60	40,200	5/18/26	78	0	96	4	New Construction - Initial	1/1/70
STATCB	4190	STATE COLLEGE BLVD	MELODY LN	DOROTHY LN	B	5	AC	5	380	80	30,400	12/30/25	78	20	80	0	Crack Sealing - AC	3/1/11
STATCB	4250	STATE COLLEGE BLVD	REVERE AVE	COMMONWEALTH AVE	B	4	AC	5	440	60	26,400	4/27/26	78	26	74	0	New Construction - Initial	1/1/97
PLACEA	4900	PLACENTIA AVE	SUNSET DR	CHAPMAN AVE	B	4	AC	5	272	60	16,320	5/18/26	78	11	83	6	New Construction - Initial	1/1/70
BASTAR	50310	BASTANCHURY RD	PVMT CHNGE (600' E/ ST JUDE)	SILVER PINE ST	B	5	AC	5	1,476	32	54,598	12/19/25	78	44	56	0	New Construction - Initial	1/1/80
BREABL	3880	BREA BLVD	SAN ANTONIO AVE	ROLLING HILLS DR	B	6	AAC	5	514	75	38,550	4/7/26	78	47	33	20	Overlay - AC Structural	5/25/20
RAYMOA	3760	RAYMOND AVE	BURTON ST	RIVERSIDE FWY (91)	B	3	AAC	5	486	60	29,160	2/20/26	79	37	63	0	Overlay - AC Structural	11/16/21
PLACEA	4860	PLACENTIA AVE	RUBY DR	RUBY DR	B	4	AC	5	228	60	13,680	1/16/26	79	23	77	0	New Construction - Initial	1/1/70
GILBES	2450	GILBERT ST	EL RANCHO VISTA	VIA INGRESO	B	8	AC	5	320	60	19,200	4/13/26	79	0	63	37	New Construction - Initial	1/1/80
RAYMOA	3641	RAYMOND AVE	PCC 365' S/ WALNUT AVE	WALNUT AVE	B	3	AC	5	367	25	11,780	2/20/26	80	18	82	0	Complete Reconstruction - AC	1/1/18
COMMOA	745	COMMONWEALTH AVE	PCC WEST OF BRIDGE	END PCC E/ BRIDGE (MARTHA PL)	B		PCC	0	686	60	35,160	3/3/26	80	60	25	15	New Construction - Initial	1/1/80
COMMOA	760	COMMONWEALTH AVE	PCC E/ BRIDGE (MARTHA PL)	BASQUE AVE	B	7	AAC	4	1,055	60	56,545	4/20/26	80	0	100	0	Overlay - AC Structural	4/3/26
GILBES	2530	GILBERT ST	DAPHNE PL	HUGHES DR	B	8	AC	5	1,287	66	84,942	12/11/25	80	30	69	1	New Construction - Initial	1/1/81
STATCB	4180	STATE COLLEGE BLVD	RANCH RD	MELODY LN	B	5	AC	5	718	80	57,440	12/30/25	80	14	86	0	Crack Sealing - AC	3/1/11
STATCB	4210	STATE COLLEGE BLVD	NUTWOOD AVE	CHAPMAN AVE	B	4	AC	6	1,265	80	101,200	12/30/25	80	14	86	0	New Construction - Initial	1/1/94
CHAPMA	1600	CHAPMAN AVE	PAVEMENT CHANGE	COMMONWEALTH AVE	B	4	AC	5	765	60	45,900	1/8/26	81	23	77	0	New Construction - Initial	1/1/88
LEMONS	3370	LEMON ST	FULLERTON COLLEGE DR	CHAPMAN AVE	B	3	AC	4	702	50	35,100	12/26/25	81	31	69	0	New Construction - Initial	5/1/07
ASSOCR	4570	ASSOCIATED RD	ROLLING HILLS DR	CRAIG CIR	B	5	AC	5	1,060	60	63,600	11/13/25	81	0	100	0	Surface Treatment - Slurry Seal	10/4/23
BREABL	3900	BREA BLVD	BEECHWOOD AVE	BASTANCHURY RD	B	6	AAC	5	787	80	62,960	1/9/26	82	63	33	4	Overlay - AC Structural	5/25/20
RAYMOA	3666	RAYMOND AVE	PCC 75' N/ ASH	PCC 300' N/ ASH AVE	B	3	AC	5	220	25	5,535	2/20/26	82	26	74	0	Complete Reconstruction - AC	1/1/18
CHAPMA	1520	CHAPMAN AVE	HART PL	ANNIN AVE	B	3	AAC	4	255	60	15,300	4/7/26	82	0	100	0	6 in overlay	8/1/09
HARBOB	3210	HARBOR BLVD	SANTA FE AVE	TRUSLOW AVE	B	3	PCC	4	867	50	43,350	3/3/26	82	36	43	21	New Construction - Initial	1/1/80
HARBOB	3250	HARBOR BLVD	ASH AVE	ELM AVE	B	3	AC	5	268	60	16,080	4/27/26	82	23	77	0	New Construction - Initial	5/1/02
PIONEA	2110	PIONEER AVE	STARBUCK ST	CAMINO CENTROLOMA	B	8	AC	2	920	40	36,800	11/6/25	82	11	86	3	New Construction - Initial	1/1/80
CHAPMA	1570	CHAPMAN AVE	MOUNTAIN VIEW PL	LADERA VISTA DR	B	4	AC	5	710	60	42,600	2/23/26	82	45	55	0	Cold Mill and Overlay	6/1/18
VALEND	510	VALENCIA DR	CEDAR AVE	BROOKHURST RD	B	7	AC	4	868	60	52,080	12/18/25	82	27	73	0	Complete Reconstruction - AC	6/1/18
GILBES	2575	GILBERT ST	PCC N/ ARTESIA AVE	ARTESIA AVE	B		PCC	0	265	60	14,000	3/3/26	82	40	25	35	New Construction - Initial	1/1/17
ORANGA	30	ORANGETHORPE AVE	PAVEMENT CHANGE	MAGNOLIA AVE	B	1	AC	5	1,345	80	110,000	1/22/26	83	28	72	0	New Construction - Initial	1/1/84
VALEND	580	VALENCIA DR	BASQUE AV E	EUCLID ST	B	7	AC	3	2,526	60	151,560	12/18/25	83	42	54	4	New Construction - Initial	1/1/80
BASTAR	1740	BASTANCHURY RD	MORELIA AVE	LAGUNA RD	B	7	AC	6	930	76	70,680	12/18/25	83	38	62	0	New Construction - Initial	1/1/92
PIONEA	2100	PIONEER AVE	GILBERT ST	STARBUCK ST	B	8	AC	2	1,110	37	41,070	11/6/25	83	0	34	66	New Construction - Initial	1/1/80
HARBOB	3000	HARBOR BLVD	IMPERIAL HWY (90)	LAS RIENDAS DR	B	6	AC	5	993	80	79,440	12/19/25	83	39	61	0	New Construction - Initial	1/1/87
LEMONS	3350	LEMON ST	BERKELEY AVE	FULLERTON COLLEGE DR	B	3	AC	4	1,030	50	51,500	12/26/25	84	24	76	0	New Construction - Initial	5/1/07
HARBOB	3010	HARBOR BLVD	LAS RIENDAS DR	LAS PALMAS DR	B	6	AC	5	1,075	80	86,000	12/19/25	84	0	100	0	New Construction - Initial	1/1/78
CHAPMA	1560	CHAPMAN AVE	GORDON LN	MOUNTAIN VIEW PL	B	4	AAC	5	225	60	13,500	2/23/26	84	0	66	34	Cold Mill and Overlay	6/1/18
BASTAR	1790	BASTANCHURY RD	SILVER PINE ST	PUENTE ST	B	6	AC	5	2,235	33	85,048	12/19/25	85	18	82	0	New Construction - Initial	1/1/80
ORANGA	170	ORANGETHORPE AVE	EADINGTON AVE	BASQUE AVE	B	1	AC	4	996	80	79,680	1/22/26	85	0	100	0	Surface Treatment - Slurry Seal	7/1/12
VALEND	460	VALENCIA DR	GILBERT ST	PINE DR	B	7	AC	4	304	60	18,240	12/18/25	85	0	100	0	Complete Reconstruction - AC	6/1/18
PIONEA	2120	PIONEER AVE	CAMINO CENTROLOMA	ZIEBELL ST	B	8	AC	2	770	36	27,720	11/6/25	85	13	87	0	New Construction - Initial	1/1/80
PIONEA	2130	PIONEER AVE	ZIEBELL ST	BENCHLEY ST	B	8	AC	2	530	38	20,140	11/6/25	85	0	82	18	New Construction - Initial	1/1/80
EUCLIS	2890	EUCLID ST	WILSHIRE AVE	COMMONWEALTH AVE	B	7	AAC	5	718	60	43,080	12/12/25	85	41	59	0	Overlay - AC Structural	12/2/21
LEMONS	3470	LEMON ST	VALENCIA DR	ASH DR	B	3	AC	4	374	60	22,440	2/5/26	85	27	73	0	New Construction - Initial	5/7/00
LEMONS	3420	LEMON ST	COMMONWEALTH AVE	SANTA FE AVE	B	3	AC	5	379	60	22,740	5/15/26	86	0	81	19	New Construction - Initial	5/7/01
STATCB	4280	STATE COLLEGE BLVD	WALNUT AVE	PCC S/ FENDER AVE	B	4	AC	5	503	80	39,005	2/23/26	86	31	69	0	Complete Reconstruction - AC	1/1/18
VALEND	610	VALENCIA DR	RICHMAN AVE	HIGHLAND AVE	B	2	AC	2	1,349	50	67,450	1/30/26	87	12	51	37	New Construction - Initial	1/1/96
RAYMOA	3600	RAYMOND AVE	WILSHIRE AVE	COMMONWEALTH AVE	B	3	AC	5	735	60	44,100	2/20/26	87	63	2	35	Complete Reconstruction - AC	5/25/20
VALEND	500	VALENCIA DR	COURTNEY AVE	CEDAR AVE	B	7	AC	4	451	60	27,060	12/18/25	87	0	100	0	Complete Reconstruction - AC	6/1/18
HARBOB	3050	HARBOR BLVD	BASTANCHURY RD	VALENCIA MESA DR	B	7	AC	6	817	66	53,922	11/6/25	87	18	82	0	New Construction - Initial	1/1/95
PLACEA	4790	PLACENTIA AVE	PALM DR	MACADAMIA LN	B	4	AC	5	543	60	32,580	12/30/25	87	26	71	3	New Construction - Initial	5/13/02
VALEND	490	VALENCIA DR	NAPA CT	COURTNEY AVE	B	7	AC	4	322	60	19,320	12/18/25	87	0	100	0	Complete Reconstruction - AC	6/1/18
CHAPMA	1550	CHAPMAN AVE	ACACIA AVE	GORDON LN	B	4	AC	5	462	60	27,720	2/23/26	87	28	72	0	Cold Mill and Overlay	6/1/18
ASSOCR	4620	ASSOCIATED RD	CRAIG CIR	BASTANCHURY RD	B	5	AC	5	2,800	60	168,000	11/13/25	88	18	82	0	Surface Treatment - Slurry Seal	10/5/23
BREABL	3890	BREA BLVD	ROLLING HILLS DR	BEECHWOOD AVE	B	6	AAC	5	645	80	51,600	1/9/26	88	22	63	15	Overlay - AC Structural	5/25/20
HARBOB	3200	HARBOR BLVD	COMMONWEALTH AVE	SANTA FE AVE	B	3	AC	5	335	59	19,765	1/30/26	88	44	39	17	New Construction - Initial	1/1/80
VALEND	480	VALENCIA DR	PINE DR	NAPA CT	B	7	AC	4	498	60	29,880	12/18/25	88	28	72	0	Complete Reconstruction - AC	6/1/18
EUCLIS	2910	EUCLID ST	WILLIAMSON AVE	AC	B	7	PCC	5	630	60	37,800	3/3/26	88	31	52	17	New Construction - Initial	1/1/80
VALEND	470	VALENCIA DR	PINE DR	PINE DR	B	7	AC	4	201	60	12,060	12/18/25	88	0	100	0	Complete Reconstruction - AC	6/1/18
PLACEA	4950	PLACENTIA AVE	AC	AC	B	4	PCC	4	271	44	11,924	3/3/26	89	45	53	2	New Construction - PCC	1/1/15
HARBOB	3230	HARBOR BLVD	TRUSLOW AVE	VALENCIA DR	B	3	ABR	4	308	60	18,480	1/30/26	89	57	43	0	New Construction - Initial	1/1/80
CHAPMA	1590	CHAPMAN AVE	STATE COLLEGE BLVD	PAVEMENT CHANGE	B	4	AC	5	845	60	50,700	1/8/26	89	23	72	5	Cold Mill and Overlay	6/1/18
PIONEA	2140	PIONEER AVE	BENCHLEY ST	PARKS RD	B	8	AC	2	896	40	35,840	11/6/25	89	0	100	0	New Construction - Initial	1/1/80
HARBOB	3260	HARBOR BLVD	ELM AVE	ROSSLYNN AVE	B	3	AC	5	341	60	20,460	1/30/26	89	25	75	0	New Construction - Initial	5/1/02
STATCB	4285	STATE COLLEGE BLVD	BEGIN PCC S/ FENDER AVE	END PCC S/ VALENCIA	B		PCC	0	410	81	27,685	3/3/26	89	27	73	0	New Construction - Initial	1/1/17
PARKSR	2720	PARKS RD	PIONEER AVE	RR TRACKS S/ PEACOCK LN	B	8	AC	2	1,310	40	58,935	11/6/25	89	40	42	18	New Construction - Initial	1/1/80
HARBOB	2990	HARBOR BLVD	LAMBERT RD	EDWARDS DR	B	6	AC	3	1,312	42	55,104	12/12/25	89	50	48	2	Complete Reconstruction - AC	6/1/18
EUCLIS	2880	EUCLID ST	CHAPMAN AVE	WILSHIRE AVE	B	7	AAC	5	603	60	36,180	12/12/25	90	0	100	0	Overlay - AC Structural	12/2/21
RAYMOA	3651	RAYMOND AVE	PCC 300' N/ ASH AVE	END 365' S/ WALNUT AVE	B	3	PCC	2	315	25	7,875	3/3/26	90	0	100	0	New Construction - Initial	1/1/80
RAYMOA	3671	RAYMOND AVE	PCC 160' S/ ASH AVE	END PCC 50' N/ ASH AVE	B	3	PCC	2	250	25	8,340	3/3/26	90	0	100	0	New Construction - Initial	1/1/80
VALEND	4356	VALENCIA DR	PCC W/ STATE COLLEGE BLVD	STATE COLLEGE BLVD	B		PCC	0	345	40	14,125	3/3/26	90	0	100	0	New Construction - Initial	1/1/17

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
RAYMOA	3580	RAYMOND AVE	CHAPMAN AVE	WHITING AVE	B	3	AC	5	300	60	18,000	2/20/26	90	0	68	32	Complete Reconstruction - AC	5/25/20
EUCLIS	2860	EUCLID ST	FERN DR	MALVERN AVE	B	7	AAC	5	1,565	60	93,900	12/12/25	91	35	65	0	Overlay - AC Structural	10/1/21
RAYMOA	3670	RAYMOND AVE	PCC 140' N/ ASH AVE	END PCC 50' S/ ASH AVE	B	3	PCC	2	225	25	10,505	3/3/26	91	0	100	0	New Construction - Initial	1/1/80
GILBES	2410	GILBERT ST	OPEN SKY DR	TRAILS DR	B	8	AC	4	307	50	15,350	10/30/25	91	0	76	24	Surface Treatment - Slurry Seal	6/1/24
HARBOB	2995	HARBOR BLVD	EDWARDS DR	IMPERIAL HWY (90)	B	6	AC	3	1,268	40	45,370	12/12/25	91	77	23	0	Complete Reconstruction - AC	8/1/18
KRAEMB	4990	KRAEMER BLVD	SATURN ST	S. CITY LIMIT	B	4	AC	5	1,095	60	65,700	12/30/25	92	0	100	0	New Construction - Initial	1/1/85
EUCLIS	2900	EUCLID ST	COMMONWEALTH AVE	WILLIAMSON AVE	B	7	AAC	6	372	66	24,552	1/29/26	92	50	50	0	Overlay - AC Structural	12/2/21
RAYMOA	3650	RAYMOND AVE	PCC 365' S/ WALNUT AVE	END PCC 300' N/ ASH AVE	B	3	PCC	2	315	25	7,875	3/3/26	92	0	100	0	New Construction - Initial	1/1/80
VALEND	440	VALENCIA DR	PRITCHARD AVE	JENSEN WY	B	7	AAC	4	738	60	44,280	12/18/25	92	0	84	16	Overlay - AC Structural	10/1/22
EUCLIS	2915	EUCLID ST	PCC	VALENCIA DR	B	7	AAC	5	250	60	15,000	1/29/26	93	0	85	15	New Construction - Initial	5/7/01
EUCLIS	2870	EUCLID ST	MALVERN AVE	CHAPMAN AVE	B	7	AAC	5	439	60	26,340	12/12/25	93	0	81	19	Overlay - AC Structural	12/2/21
VALEND	520	VALENCIA DR	BROOKHURST RD	LOCUST DR	B	7	AC	4	370	60	22,200	12/18/25	93	16	55	29	Complete Reconstruction - AC	6/1/18
GILBES	2400	GILBERT ST	CASTLEWOOD DR	OPEN SKY DR	B	8	AC	4	1,841	50	92,050	10/30/25	94	45	16	39	Surface Treatment - Slurry Seal	6/1/24
VALEND	570	VALENCIA DR	BASQUE AVE	BASQUE AVE	B	7	AC	2	128	60	7,680	12/18/25	94	0	82	18	New Construction - Initial	1/1/77
VALEND	420	VALENCIA DR	MAGNOLIA AVE	PRITCHARD AVE	B	7	AAC	4	841	60	50,460	12/18/25	94	0	100	0	Overlay - AC Structural	10/1/22
BASTAR	1730	BASTANCHURY RD	HIGHLAND AVE	MORELIA AVE	B	7	AC	6	956	76	72,656	12/18/25	94	62	38	0	New Construction - Initial	1/1/92
GILBES	2390	GILBERT ST	N CITY LIMITS	CASTLEWOOD DR	B	8	AC	2	1,891	45	85,095	10/30/25	94	0	6	94	Surface Treatment - Slurry Seal	6/1/24
ORANGA	270	ORANGETHORPE AVE	RAY AVE	HIGHLAND AVE	B	2	AC	5	500	80	40,000	12/26/25	94	0	100	0	New Construction - Initial	1/1/84
VALEND	550	VALENCIA DR	PACIFIC DR	EADINGTON AVE	B	7	AC	2	173	60	10,380	12/18/25	94	0	80	20	Complete Reconstruction - AC	6/1/18
VALEND	540	VALENCIA DR	WANDA DR	PACIFIC DR	B	7	AC	3	442	60	26,520	12/18/25	94	0	100	0	Complete Reconstruction - AC	6/1/18
CHAPMA	1610	CHAPMAN AVE	COMMONWEALTH AVE	ORANGE FWY (57) ENTRANCE	B	4	AC	4	965	60	57,900	1/8/26	95	47	53	0	Cold Mill and Overlay	6/1/18
ORANGA	260	ORANGETHORPE AVE	RICHMAN AVE	RAY AVE	B	2	AC	4	835	80	66,800	12/26/25	95	0	100	0	New Construction - Initial	1/1/81
VALEND	430	VALENCIA DR	PRITCHARD AVE	PRITCHARD AVE	B	7	AC	4	180	60	10,800	12/18/25	95	0	100	0	New Construction - Initial	1/1/80
VALEND	560	VALENCIA DR	EADINGTON AVE	BASQUE AVE	B	7	AC	3	1,182	60	70,920	12/18/25	95	0	100	0	Complete Reconstruction - AC	6/1/18
CHAPMA	1630	CHAPMAN AVE	ORANGE FWY (57)	PLACENTIA AVE	B	4	AC	4	356	74	26,344	1/8/26	95	42	58	0	Cold Mill and Overlay	6/1/18
GILBES	2420	GILBERT ST	TRAILS DR	COYOTE HILLS DR	B	8	AC	4	1,380	50	69,000	10/30/25	96	0	21	79	Surface Treatment - Slurry Seal	6/1/24
VALEND	530	VALENCIA DR	LOCUST DR	WANDA DR	B	7	AC	3	494	60	29,640	12/18/25	96	0	100	0	Complete Reconstruction - AC	6/1/18
COMMOA	940	COMMONWEALTH AVE	BALCOM AVE	PRINCETON AVE	B	3	AC	4	775	60	46,500	2/6/26	96	0	0	100	Complete Reconstruction - AC	5/25/20
ORANGA	280	ORANGETHORPE AVE	HIGHLAND AVE	HARBOR BLVD	B	2	AC	5	1,338	80	107,040	12/26/25	96	0	100	0	New Construction - Initial	1/1/80
NUTWOA	4395	NUTWOOD AVE	SB OFF RAMP	NB OFF RAMP	B	4	AC	6	472	80	37,760	1/8/26	96	0	100	0	Cold Mill and Overlay	6/1/18
NUTWOA	4400	NUTWOOD AVE	NB OFF RAMP	PLACENTIA AVE	B	4	AC	4	513	60	30,780	1/8/26	96	0	100	0	Cold Mill and Overlay	6/1/18
BASTAR	1720	BASTANCHURY RD	EUCLID ST	HIGHLAND AVE	B	7	AC	6	2,425	66	160,050	12/18/25	96	0	29	71	New Construction - Initial	1/1/92
COMMOA	1010	COMMONWEALTH AVE	STANFORD AVE	RAYMOND AVE	B	3	AC	4	328	60	19,680	2/6/26	96	0	0	100	Complete Reconstruction - AC	5/25/20
COMMOA	1020	COMMONWEALTH AVE	RAYMOND AVE	MONTAGUE AVE	B	3	AC	4	799	60	47,940	2/6/26	96	0	0	100	Complete Reconstruction - AC	5/25/20
BROOKR	2630	BROOKHURST RD	SOUTHGATE AVE	ORANGETHORPE AVE	B	1	AAC	5	782	60	46,920	12/12/25	96	0	100	0	Surface Reconstruction - AC	11/16/21
ROSECA	1980	ROSECRANS AVE	EMERY RANCH RD	SUNNY RIDGE DR	B	8	AAC	4	4,320	80	345,600	10/22/25	97	0	100	0	Overlay - AC Structural	6/1/22
BROOKR	2590	BROOKHURST RD	COMMONWEALTH AVE	VALENCIA DR	B	7	AAC	4	1,213	60	72,780	12/12/25	97	0	100	0	Surface Reconstruction - AC	11/16/21
BROOKR	2600	BROOKHURST RD	VALENCIA DR	WEST AVE	B	1	AAC	4	486	60	29,160	12/12/25	97	0	100	0	Surface Reconstruction - AC	11/16/21
BROOKR	2610	BROOKHURST RD	WEST AVE	OAK AVE	B	1	AAC	4	358	60	21,480	12/12/25	97	0	100	0	Surface Reconstruction - AC	11/16/21
BROOKR	2620	BROOKHURST RD	OAK AVE	SOUTHGATE AVE	B	1	AAC	4	1,088	60	65,280	12/12/25	97	0	100	0	Surface Reconstruction - AC	11/16/21
CHAPMA	1620	CHAPMAN AVE	ORANGE FWY (57) ENTRANCE	ORANGE FWY (57)	B	4	AC	6	386	74	28,564	1/8/26	97	0	100	0	Cold Mill and Overlay	6/1/18
IMPERH	4010	IMPERIAL HWY	HARBOR BLVD	BONITA PL	B	6	AC	4	1,684	66	111,144	10/30/25	97	0	0	100	New Construction - Initial	1/1/80
ROSECA	1970	ROSECRANS AVE	W CITY LIMITS	EMERY RANCH RD	B	8	AAC	5	182	80	14,560	10/22/25	97	0	100	0	Overlay - AC Structural	6/1/22
EUCLIS	2830	EUCLID ST	RODEO DR	VALLEY VIEW DR	B	7	AAC	5	1,156	56	64,736	12/12/25	97	0	100	0	Overlay - AC Structural	10/1/22
ORANGA	250	ORANGETHORPE AVE	WOODS AVE	RICHMAN AVE	B	2	AC	4	1,182	80	94,560	12/26/25	98	0	100	0	New Construction - Initial	1/1/81
IMPERH	4040	IMPERIAL HWY	GEMINI AVE	PUENTE ST	B	6	AC	5	1,763	80	141,040	10/30/25	98	0	100	0	New Construction - Initial	1/1/80
COMMOA	1000	COMMONWEALTH AVE	CORNELL AVE	STANFORD AVE	B	3	AC	4	512	60	30,720	2/6/26	98	0	0	100	Complete Reconstruction - AC	5/25/20
ASSOCR	4650	ASSOCIATED RD	NORTHCREEK LN	YORBA LINDA BLVD	B	4	AAC	5	834	60	50,040	11/13/25	99	0	100	0	Overlay - AC Structural	8/4/23
EUCLIS	2810	EUCLID ST	BASTANCHURY RD	VALENCIA MESA DR	B	7	AAC	5	1,059	60	63,540	12/12/25	99	0	100	0	Overlay - AC Structural	10/1/22
EUCLIS	2820	EUCLID ST	VALENCIA MESA DR	RODEO DR	B	7	AAC	5	720	60	43,200	12/12/25	99	0	100	0	Overlay - AC Structural	10/1/22
EUCLIS	2840	EUCLID ST	VALLEY VIEW DR	FERN DR	B	7	AAC	5	700	60	42,000	12/12/25	99	0	100	0	Overlay - AC Structural	10/1/22
IMPERH	4020	IMPERIAL HWY	BONITA PL	PALM ST	B	6	AC	4	930	80	74,400	10/30/25	99	0	100	0	New Construction - Initial	1/1/80
ASSOCR	4630	ASSOCIATED RD	BASTANCHURY RD	WOODBRIAR CT	B	4	AAC	5	351	60	21,060	11/13/25	99	0	100	0	Overlay - AC Structural	8/4/23
ASSOCR	4640	ASSOCIATED RD	WOODBRIAR CT	NORTHCREEK LN	B	4	AAC	5	405	60	24,300	11/13/25	99	0	100	0	Overlay - AC Structural	8/4/23
COMMOA	960	COMMONWEALTH AVE	PRINCETON AVE	CORNELL AVE	B	3	AC	4	980	60	58,800	2/6/26	99	0	0	100	Complete Reconstruction - AC	5/25/20
IMPERH	4030	IMPERIAL HWY	PALM ST	GEMINI AVE	B	6	AC	5	881	80	70,480	10/30/25	99	0	100	0	New Construction - Initial	1/1/80
BROOKR	2652	BROOKHURST RD	PVMNT CHNGE N/ RIVERSIDE FWY (91)	CITY LIMITS (91 FWY WB RAMPS)	B	1	AAC	5	255	60	16,840	12/12/25	100	0	100	0	Overlay - AC Structural	7/1/23
ORANGA	330	ORANGETHORPE AVE	ACACIA AVE	STATE COLLEGE BLVD	B	4	AC	6	2,647	80	211,760	1/16/26	100	0	100	0	Complete Reconstruction - AC	10/1/22
VALEND	450	VALENCIA DR	JENSEN WY	GILBERT AVE	B	7	AAC	4	739	60	44,340	12/18/25	100	0	100	0	Overlay - AC Structural	10/1/22
ASSOCR	4550	ASSOCIATED RD	IMPERIAL HWY (90)	ORANGE FWY (57)	B	4	AAC	5	1,470	60	88,200	11/13/25	100	0	0	0	Overlay - AC Structural	1/3/24
ASSOCR	4560	ASSOCIATED RD	ORANGE FWY (57)	ROLLING HILLS DR	B	5	AAC	5	1,467	60	88,020	11/13/25	100	0	0	0	Overlay - AC Structural	1/3/24
BRADFA	4510	BRADFORD AVE	YORBA LINDA BLVD	TOPAZ LN	B	4	AAC	2	987	60	59,220	1/8/26	100	0	0	0	Overlay - AC Structural	3/4/24
BRADFA	4520	BRADFORD AVE	TOPAZ LN	QUARTZ LN	B	4	AC	2	981	60	58,860	1/8/26	100	0	0	0	New Construction - Initial	1/1/80
BROOKR	2650	BROOKHURST RD	ROBERTA AVE	PVMNT CHNGE N/ RIVERSIDE FWY (91)	B	1	AAC	5	374	60	49,620	12/12/25	100	0	0	0	Overlay - AC Structural	7/1/23
EUCLIS	2790	EUCLID ST	ROSCRANS AVE	RR TRACKS S/ PASEO DORADO	B	8	AC	5	1,405	80	112,400	5/15/26	100	0	0	0	Complete Reconstruction - AC	4/3/26
EUCLIS	2800	EUCLID ST	RR TRACKS S/ PASEO DORADO	BASTANCHURY RD	B	8	AC	5	260	80	17,870	5/15/26	100	0	0	0	Complete Reconstruction - AC	4/3/26
HARBOB	3160	HARBOR BLVD	CHAPMAN AVE	COMMONWEALTH AVE	B	3	AC	5	1,305	52	67,860	11/6/25	100	0	0	0	Surface Treatment - REAS	7/30/25
ORANGA	290	ORANGETHORPE AVE	HARBOR BLVD	POMONA AVE	B	3	AAC	5	691	66	45,606	12/26/25	100	0	0	0	Overlay - AC Structural	12/27/23
ORANGA	300	ORANGETHORPE AVE	POMONA AVE	LEMON ST	B	3	AAC	5	660	60	39,600	12/26/25	100	0	0	0	Overlay - AC Structural	12/27/23
ORANGA	340	ORANGETHORPE AVE	STATE COLLEGE BLVD	PLACENTIA AVE	B	4	AAC	6	1,919	86	165,034	1/16/26	100	0	0	0	Surface Reconstruction - AC	2/1/25
PALMST	3980	PALM ST	LAMBERT RD	MOONSTONE ST	B	6	AAC	5	1,025	60	61,500	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
PALMST	3990	PALM ST	MOONSTONE ST	BONITA PL	B	6	AAC	5	278	60	16,680	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
PALMST	4000	PALM ST	BONITA PL	IMPERIAL HWY (90)	B	6	AAC	5	1,310	60	78,600	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
RAYMOA	3590	RAYMOND AVE	WHITING AVE	WILSHIRE AVE	B	3	AC	5	276	60	16,560	2/20/26	100	0	100	0	Complete Reconstruction - AC	5/25/20
ROSECA	2080	ROSECRANS AVE	CAMINO LOMA	CAMINO DEL SOL	B	8	AC	5	545	68	37,060	4/3/26	100	0	0	0	Complete Reconstruction - AC	4/3/26
ROSECA	2090	ROSECRANS AVE	CAMINO DEL SOL	EUCLID ST	B	8	AC	6	361	80	28,880	4/3/26	100	0	0	0	Complete Reconstruction - AC	4/3/26
									68.4		**22,545,890**							
		Locals																
BROOKH	10940	BROOKHURST PL	BASTANCHURY RD	END	E	7	AC	2	141	36	5,076	4/9/25	4	42	58	0	New Construction - Initial	1/1/80
LSCOYO	16040	LOS COYOTES DR	WESTERN CITY LIMIT	CLEAR CREEK DR	E	8	AC	2	130	32	4,160	3/26/25	7	38	62	0	New Construction - Initial	1/1/80
LEEAVE	50180	LEE AVE	WEST AVE	ASH AVE	E	7	AC	2	198	32	7,136	3/19/25	8	95	5	0	New Construction - AC	1/1/80
JEFRSN	14845	JEFFERSON AVE	N END	CHAPMAN AVE	E	2	AC	2	150	26	3,900	12/20/21	8	100	0	0	New Construction - Initial	1/1/80
CERRIT	11630	CERRITOS DR	RICHMAN KNOLL	EL CAMINO DR	E	7	AC	2	1,580	32	50,560	4/9/25	8	59	3	38	New Construction - Initial	1/1/80
ALBERT	6080	ALBERTA PL	OAK AVE	ELM AVE	E	1	AC	2	280	32	8,960	3/19/25	8	95	5	0	Surface Treatment - Slurry Seal	7/1/12
BERKLC	10760	BERKELEY CIR	END	WALNUT AVE	E	3	AC	2	146	32	4,672	11/19/21	8	37	15	48	New Construction - Initial	1/1/80
GLNWOD	13665	GLENWOOD AVE	RIEDEL AVE	OAKDALE AVE	E	3	AC	2	260	32	8,320	11/17/21	8	97	3	0	New Construction - Initial	1/1/80
SNTMON	19310	SANTA MONICA AVE	HERMOSA DR	SANTA MARIA AVE	E	6	AC	2	625	32	20,000	4/18/25	9	66	24	10	New Construction - Initial	1/1/80
PACFIC	17596	PACIFIC DR	OLIVE AVE	HILL AVE	E	1	AC	2	490	32	15,680	3/25/25	9	90	3	7	Surface Treatment - Slurry Seal	7/1/12
SOGATE	19650	SOUTHGATE AVE	BASQUE AVE	LEE AVE	E	1	AC	2	710	32	22,720	3/19/25	9	96	3	1	Surface Treatment - Slurry Seal	7/1/12
PRNCTN	18120	PRINCETON AVE	SANTA FE AVE	WALNUT AVE	E	3	AC	2	270	32	8,640	11/19/21	9	89	11	0	New Construction - Initial	1/1/80
OAKDLE	17300	OAKDALE AVE	DOROTHY LN	RIVERSIDE DR	E	3	AC	2	1,145	32	36,640	11/17/21	9	87	13	0	New Construction - Initial	1/1/80
SALLY	19060	SALLY PL	VALENCIA DR	END	E	3	AC	2	615	38	23,370	2/17/22	9	75	25	0	New Construction - Initial	1/1/80
RODEO	18705	RODEO RD	RICHMAN KNOLL	GLENVIEW DR	E	7	AC	2	1,135	28	31,780	4/9/25	9	78	16	6	New Construction - Initial	1/1/80
KROEGR	15120	KROEGER AVE	EDGECLIFF DR	MIRAMAR PL	E	5	AC	2	850	32	27,200	4/16/25	9	69	27	4	New Construction - Initial	1/1/80
PACFIC	17590	PACIFIC DR	WEST AVE	OAK AVE	E	1	AC	2	490	32	15,680	3/25/25	10	83	3	14	Surface Treatment - Slurry Seal	7/1/12
ELMAVE	12850	ELM AVE	BASQUE AVE	LEE AVE	E	1	AC	2	700	32	22,400	3/19/25	10	88	0	12	Surface Treatment - Slurry Seal	7/1/12
CONEJO	11912	CONEJO LN	CAMINO CENTROLOMA	PARKS RD	E	8	AC	2	1,336	32	42,752	4/23/25	10	73	26	1	New Construction - Initial	1/1/80
CENTRA	11620	CENTRAL AVE	HALE AVE	END	E	4	AC	2	635	32	20,320	12/10/20	10	97	3	0	New Construction - Initial	1/1/80
YERMO	21650	YERMO PL	END	CAMINO REY	E	8	AC	2	322	32	12,654	4/21/25	10	68	23	9	New Construction - Initial	1/1/80
HOLYDL	14605	HOLLYDALE DR	DOROTHY LN	GLENWOOD AVE	E	3	AC	2	700	32	22,400	11/17/21	11	91	5	4	New Construction - Initial	1/1/80
PINRDG	17910	PINE RIDGE KNOLL	LA CRESTA PL	END	E	7	AC	2	641	28	17,948	4/9/25	11	64	27	9	New Construction - Initial	1/1/80
CATLIN	11550	CATALINA RD	CORONADO DR	E END	E	6	AC	2	310	32	9,920	12/30/20	11	92	8	0	New Construction - Initial	1/1/80
CAMISO	11260	CAMINO DEL SOL	NICOLAS DR	ROSECRANS AVE	E	8	AC	2	1,261	32	40,352	4/11/25	11	61	27	12	New Construction - Initial	1/1/80
LEEAVE	15685	LEE AVE	OLIVE AVE	PORTER AVE	E	1	AC	2	895	32	28,640	3/19/25	11	70	15	15	New Construction - AC	1/1/80
LAMESP	15190	LA MESA PL	END	LA MESA DR	E	7	AC	2	200	16	3,200	4/2/25	12	34	37	29	New Construction - Initial	1/1/80
SYCMRE	20020	SYCAMORE AVE	MELODY LN	END	E	5	AC	2	320	32	10,240	11/24/20	12	95	5	0	New Construction - Initial	1/1/80
SNTFEA	19240	SANTA FE AVE	PRINCETON AVE	YALE AVE	E	3	AC	2	280	32	8,960	11/19/21	12	82	18	0	New Construction - Initial	1/1/80
LSRDDR	15620	LAS RIENDAS DR	END	PECAN ST	E	6	AC	2	110	32	3,520	1/15/21	12	72	17	11	New Construction - Initial	1/1/80
VISDMR	20850	VISTA DEL MAR	END	ACACIA AVE	E	5	AC	2	682	32	24,324	1/6/21	12	76	9	15	New Construction - Initial	1/1/80
YERMO	21660	YERMO PL	END	CAMINO LA VISTA	E	8	AC	2	520	32	16,640	4/22/25	12	59	27	14	New Construction - Initial	1/1/80
SYCMRE	20030	SYCAMORE AVE	NUTWOOD AVE	BROOKDALE PL	E	4	AC	2	350	32	11,200	4/21/25	13	97	3	0	New Construction - Initial	1/1/80
JUANIT	14950	JUANITA PL	CLARION DR	END	E	6	AC	2	710	32	22,720	1/6/21	13	71	5	24	New Construction - Initial	1/1/80
IVYPL	14760	IVY PL	WINCHESTER ST	MYSTIC AVE	E	4	AC	2	270	32	8,640	12/4/20	13	62	12	26	New Construction - Initial	1/1/80
ROSEWD	18920	ROSEWOOD AVE	END	FLOWER AVE	E	1	AC	2	225	26	5,850	4/12/23	13	96	2	2	Surface Treatment - Slurry Seal	7/1/12
FERNDR	13160	FERN DR	RAYMOND AVE	NORMAN PL	E	3	AC	2	470	32	15,040	11/17/21	13	64	29	7	New Construction - Initial	1/1/80
CALAVE	11070	CALAVERA PL	END	CAMINO REY	E	8	AC	2	148	32	4,736	4/21/25	13	60	40	0	New Construction - Initial	1/1/80
SNTMAR	19300	SANTA MARIA AVE	HERMOSA DR	SANTA MONICA AVE	E	6	AC	2	735	32	23,520	4/18/25	13	59	29	12	New Construction - Initial	1/1/80
LASNDA	15200	LA SENDA DR	LA TRAVESIA DR	EUCLID ST	E	6	AC	2	1,140	32	36,480	12/11/20	13	76	16	8	New Construction - Initial	1/1/80
MYSTIC	17000	MYSTIC AVE	DEERPARK DR	END	E	4	AC	2	575	32	18,400	12/4/20	13	82	9	9	New Construction - Initial	1/1/80
ARTESI	10050	ARTESIA AVE	DALE PL	PRICHARD AVE	E	7	AC	2	3,487	39	135,993	3/26/25	13	74	17	9	New Construction - Initial	1/1/80
CAMICE	11210	CAMINO CENTROLOMA	N END	ROSECRANS AVE	E	8	AC	2	778	32	24,896	4/21/25	13	57	35	8	New Construction - Initial	1/1/80
BASQUE	10615	BASQUE AVE	OAK AVE	HILL AVE	E	1	AC	2	1,129	32	36,128	3/19/25	13	66	11	23	Surface Treatment - Slurry Seal	7/1/12
LNDNDL	15855	LINDENDALE AVE	HARMONY LN	DOROTHY LN	E	5	AC	2	280	32	8,960	4/16/25	14	82	18	0	New Construction - Initial	1/1/80
OAKAVE	17270	OAK AVE	EADINGTON AVE	BASQUE AVE	E	1	AC	2	1,290	32	41,280	3/19/25	14	85	15	0	Surface Treatment - Slurry Seal	7/1/12
HARGTN	14080	HARRINGTON DR	VICTORIA DR	CENTRAL AVE	E	3	AC	2	810	32	25,920	12/6/21	14	89	11	0	New Construction - Initial	1/1/80
SMKWDA	19600	SMOKEWOOD AVE	E END	PANORAMA RD	E	5	AC	2	2,110	32	67,520	12/15/20	14	83	11	6	New Construction - Initial	1/1/80
CAMIRC	11340	CAMINO RECONDITO	AVENIDA SELVA	END	E	8	AC	2	362	32	11,584	4/22/25	14	65	28	7	New Construction - Initial	1/1/80
SHEFLD	19450	SHEFFIELD PL	DEERPARK DR	END	E	4	AC	2	545	32	9,440	2/27/25	14	80	7	13	New Construction - Initial	1/1/80
ORCHRD	17535	ORCHARD AVE	ORANGETHORPE AVE	WOODCREST AVE	E	1	AC	2	235	32	7,520	4/17/23	14	90	10	0	Surface Treatment - Slurry Seal	7/1/12
BASQUE	10625	BASQUE AVE	BAKER AVE	HOUSTON AVE	E	1	AC	2	765	32	24,480	4/11/23	14	91	4	5	Surface Treatment - Slurry Seal	7/1/12
PUENTE	18250	PUENTE ST	ROSARITA DR	ROLLING HILLS DR	E	6	AC	2	1,840	37	68,080	12/15/20	14	64	10	26	New Construction - Initial	1/1/80
MARIE	16350	MARIE AVE	END	AMERIGE AVE	E	7	AC	2	205	26	5,330	4/1/25	14	91	3	6	New Construction - Initial	1/1/80
NANCY	17020	NANCY LN	LONGVIEW DR	END	E	5	AC	2	745	32	23,840	12/3/20	14	72	4	24	New Construction - Initial	1/1/80
ELMAVE	12840	ELM AVE	EADINGTON AVE	END	E	1	AC	2	720	32	23,040	3/19/25	14	80	20	0	Surface Treatment - Slurry Seal	7/1/12
CITRUS	11810	CITRUS AVE	BAKER AVE	HOUSTON AVE	E	1	AC	2	640	32	20,480	4/11/23	14	84	4	12	Surface Treatment - Slurry Seal	7/1/12
GRNDVW	13691	GRANDVIEW AVE	VALLEY VIEW DR	END	E	7	AC	2	1,165	32	38,780	4/23/25	14	69	22	9	New Construction - Initial	1/1/80
LAMBRT	15370	LAMBERT DR	WEST AVE	OAK AVE	E	1	AC	2	550	32	17,600	3/19/25	15	97	3	0	Surface Treatment - Slurry Seal	7/1/12
ASHAVE	10110	ASH AVE	EADINGTON AVE	LAMBERT DR	E	1	AC	2	1,008	32	32,256	3/19/25	15	76	22	2	Surface Treatment - Slurry Seal	7/1/12
CRISTI	12120	CRISTINE PL	VALENCIA MESA DR	END	E	7	AC	2	180	26	4,680	4/23/25	15	55	37	8	New Construction - Initial	1/1/80
PACFIC	17602	PACIFIC DR	ORANGETHORPE AVE	GAGE AVE	E	1	AC	2	605	32	19,360	4/17/23	15	66	3	31	Surface Treatment - Slurry Seal	7/1/12
AVOLEN	10395	AVOLENCIA DR	RICHMAN AVE	VALLEY VIEW DR	E	7	AC	2	1,575	32	50,400	4/23/25	15	59	36	5	New Construction - Initial	1/1/80
LSRDDR	15600	LAS RIENDAS DR	W END	SAN MIGUEL DR	E	6	AC	2	700	32	22,400	1/15/21	15	64	30	6	New Construction - Initial	1/1/80
ELPASO	12750	EL PASO LN	W END	CAMINO LA VISTA	E	8	AC	2	285	32	9,120	4/22/25	15	65	28	7	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
ALTVIS	7010	ALTA VISTA DR	RODEO RD	END	E	7	AC	2	590	24	14,160	4/9/25	15	74	17	9	New Construction - Initial	1/1/80
SORNTO	19620	SORRENTO PL	SKYLINE DR	END	E	5	AC	2	250	32	8,000	12/3/20	15	89	9	2	New Construction - Initial	1/1/80
SNTIGO	19360	SANTIAGO RD	BEECHWOOD AVE	S END	E	5	AC	2	350	32	11,200	12/22/20	16	62	17	21	New Construction - Initial	1/1/80
LATRVA	15230	LA TRAVESIA DR	END	LAKEVIEW WAY	E	6	AC	2	1,025	32	32,800	12/11/20	16	64	31	5	New Construction - Initial	1/1/80
GREGRY	13800	GREGORY AVE	ADLENA DR	BASQUE AVE	E	7	AC	2	1,360	32	43,520	4/2/25	16	83	5	12	New Construction - Initial	1/1/80
EADING	12580	EADINGTON AVE	FLOWER AVE	SOUTHGATE AVE	E	1	AC	2	560	32	17,920	3/19/25	16	91	9	0	Surface Treatment - Slurry Seal	7/1/12
NORMNP	17160	NORMAN PL	FERN DR	GLENWOOD AVE	E	3	AC	2	370	32	11,840	11/17/21	16	85	11	4	New Construction - Initial	1/1/80
MIGUEL	16700	MIGUEL PL	CORONADO DR	END	E	6	AC	2	350	32	11,200	12/30/20	16	91	6	3	New Construction - Initial	1/1/80
GLNVWD	13605	GLEN VIEW DR	VALENCIA MESA DR	RODEO RD	E	7	AC	2	535	24	12,840	4/9/25	16	88	12	0	New Construction - Initial	3/1/11
LACRST	15140	LA CRESTA PL	RODEO RD	PINE RIDGE KNOLL	E	7	AC	2	590	28	16,520	4/9/25	16	81	10	9	New Construction - Initial	1/1/80
ORANGE	17475	ORANGE AVE	BAKER AVE	HOUSTON AVE	E	1	AC	2	590	32	18,880	4/11/23	16	88	12	0	Surface Treatment - Slurry Seal	7/1/12
VALMES	51000	VALENCIA MESA DR	PEPPERTREE RD	SUNNY CREST DR	E	7	AC	2	505	50	25,250	4/23/25	17	50	37	13	New Construction - Initial	1/1/80
RICHMN	18490	RICHMAN AVE	RICHMAN KNOLL	VALLEY VIEW DR	E	7	AC	2	1,660	36	59,760	4/9/25	17	86	13	1	New Construction - Initial	1/1/80
DRFTWD	12560	DRIFTWOOD	PANORAMA RD	END	E	5	AC	2	290	32	9,280	1/6/21	17	79	16	5	New Construction - Initial	1/1/80
MESVRD	16610	MESA VERDE	W END	CAMINO LA VISTA	E	8	AC	2	340	32	10,880	4/22/25	17	54	38	8	New Construction - Initial	1/1/80
BEECHW	10720	BEECHWOOD AVE	BREA BL	SANTIAGO RD	E	5	AC	2	200	32	6,400	12/22/20	17	63	37	0	New Construction - Initial	1/1/80
BROOKD	10930	BROOKDALE PL	SYCAMORE AVE	CONCORD AVE	E	4	AC	2	504	26	13,104	4/21/25	17	96	4	0	New Construction - Initial	1/1/80
AMERIG	7070	AMERIGE AVE	BASQUE AVE	ORCHARD AVE	E	7	AC	2	1,070	32	34,240	4/1/25	17	76	5	19	New Construction - Initial	1/1/80
FAIRGN	13060	FAIRGREEN DR	TIFFANY PL	END	E	8	AC	2	1,920	32	63,440	4/23/25	17	60	34	6	New Construction - Initial	1/1/80
FARVIW	13080	FARVIEW RD	SUNNY RIDGE DR	KINGHAM WAY	E	8	AC	2	555	32	17,760	4/22/25	17	63	31	6	New Construction - Initial	1/1/80
CALSER	11120	CALLE SERENA	END	CAMINO CENTROLOMA	E	8	AC	2	439	32	14,048	4/21/25	17	55	43	2	New Construction - Initial	1/1/80
LSLNSL	15500	LAS LANAS LN	END	PASEO DORADO	E	8	AC	2	765	32	24,480	4/18/25	17	68	26	6	New Construction - Initial	1/1/80
CORONA	11970	CORONADO DR	END	LAGUNA RD	E	6	AC	2	1,790	32	57,280	12/4/20	17	84	15	1	New Construction - Initial	1/1/80
OAKAVE	17265	OAK AVE	LOCUST DR	PACIFIC DR	E	1	AC	2	815	32	26,080	3/25/25	18	96	4	0	Surface Treatment - Slurry Seal	7/1/12
PANORM	17680	PANORAMA RD	BREA BLVD	END	E	5	AC	2	2,215	32	70,880	12/15/20	18	80	13	7	New Construction - Initial	1/1/80
SHEPRD	19463	SHEPPARD DR	VIRGINIA RD	CANNON LN	E	5	AC	2	1,218	32	38,976	12/3/20	18	91	8	1	New Construction - Initial	1/1/80
WLMSON	21310	WILLIAMSON AVE	COMMONWEALTH AVE	EUCLID ST	E	7	AC	2	1,245	32	39,840	4/1/25	18	70	14	16	New Construction - Initial	1/1/80
JEFRSN	14880	JEFFERSON AVE	SOUTHGATE AVE	END	E	2	AC	2	370	32	11,840	12/1/21	18	76	4	20	Surface Treatment - Slurry Seal	7/1/12
LSRDDR	15610	LAS RIENDAS DR	SAN MIGUEL DR	E END	E	6	AC	2	720	32	23,040	12/1/20	18	73	25	2	New Construction - Initial	1/1/80
FLTRDG	13230	FLINTRIDGE DR	LAS PALMAS DR	END	E	6	AC	2	590	28	16,520	1/7/21	18	78	12	10	New Construction - Initial	1/1/80
LEMNHL	15710	LEMON HILL TERR	END	MALVERN AVE	E	2	AC	2	1,045	32	33,440	12/20/21	18	88	12	0	New Construction - Initial	1/1/80
RANCHO	18320	RANCHO CIR	TERRAZA PL	END	E	6	AC	2	2,535	32	81,120	12/3/20	18	63	4	33	New Construction - Initial	1/1/80
ADAMS	5050	ADAMS AVENUE	END	CHAPMAN AVE	E	2	AC	2	140	26	3,640	12/20/21	18	86	14	0	New Construction - Initial	1/1/80
LRKWOD	15450	LARKWOOD DR	POST RD	CANDLEWOOD DR	E	8	AC	2	600	32	19,200	4/17/25	18	65	23	12	New Construction - Initial	1/1/80
PASGRN	17745	PASEO GRANDE	MANZANITA DR	E END	E	8	AC	2	240	32	7,680	4/22/25	19	61	29	10	New Construction - Initial	1/1/80
PASDOR	17730	PASEO DORADO	EUCLID AVE	VERONA DR	E	6	AC	2	190	32	6,080	12/30/20	19	80	20	0	New Construction - Initial	1/1/80
CAMIVI	11285	CAMINO LA VISTA	GRISSOM PARK DR	ROSECRANS AVE	E	8	AC	2	687	32	21,984	4/22/25	19	60	31	9	New Construction - Initial	1/1/80
WESTAV	21120	WEST AVE	MAGNOLIA AVE	PRITCHARD AVE	E	1	AC	2	965	33	31,845	4/20/23	19	95	4	1	Surface Treatment - Slurry Seal	7/1/12
CHERRY	11705	CHERRY AVE	COURTNEY AVE	CEDAR AVE	E	1	AC	2	200	32	6,400	4/18/23	19	96	4	0	Surface Treatment - Slurry Seal	7/1/12
SNTBAR	19190	SANTA BARBARA AVE	TERRAZA PL	DOMINGO RD	E	6	AC	2	1,441	32	46,112	12/23/20	19	78	3	19	New Construction - Initial	1/1/80
WINCTR	21470	WINCHESTER ST	IVY PL	HARTFORD ST	E	4	AC	2	540	32	17,280	12/4/20	19	82	18	0	New Construction - Initial	1/1/80
KNGHM	15070	KINGHAM WAY	BARONET PL	END	E	8	AC	2	1,676	32	53,632	4/22/25	19	66	34	0	New Construction - Initial	1/1/80
MELODY	16580	MELODY LN	VICTORIA DR	STATE COLLEGE BLVD	E	5	AC	2	1,165	32	37,280	4/21/25	19	80	12	8	New Construction - Initial	1/1/80
WILSON	21460	WILSON AVE	NUTWOOD AVE	CENTRAL AVE	E	4	AC	2	920	32	29,440	4/21/25	19	83	17	0	New Construction - Initial	1/1/80
ORANGE	17455	ORANGE AVE	COMMONWEALTH AVE	WILLIAMSON WY	E	7	AC	2	320	32	10,240	4/1/25	19	75	10	15	New Construction - Initial	1/1/80
HILLAV	14440	HILL AVE	PINE DR	COURTNEY AVE	E	1	AC	2	990	32	31,680	4/12/23	19	88	12	0	Surface Treatment - Slurry Seal	7/1/12
ELRANC	12760	EL RANCHO VISTA	END	GILBERT ST	E	8	AC	2	920	32	29,440	4/22/25	19	66	31	3	New Construction - Initial	1/1/80
ELTHAM	12960	ELTHAM PL	END	TARRYTOWN DR	E	8	AC	2	570	32	18,240	4/17/25	19	68	24	8	New Construction - Initial	1/1/80
RODEO	18710	RODEO RD	GLENVIEW DR	EUCLID ST	E	7	AC	2	1,200	28	33,600	4/9/25	19	76	11	13	New Construction - Initial	1/1/80
EADING	12585	EADINGTON AVE	SOUTHGATE AVE	ORANGETHORPE AVE	E	1	AC	2	700	32	22,400	3/19/25	19	73	27	0	Surface Treatment - Slurry Seal	7/1/12
WOODCR	50110	WOODCREST AVE	ORCHARD AVE	CITRUS AVE	E	1	AC	2	695	32	22,240	4/17/23	19	90	10	0	Surface Treatment - Slurry Seal	7/1/12
ORANFRON	9920	ORANGETHROPE (FRONTAGE)	GILBERT ST	END	E	1	AC	2	1,681	30	50,430	4/12/23	19	85	13	2	New Construction - AC	1/1/80
AMERIG	8030	AMERIGE AVE	LEMON ST	BALCOM AVE	E	3	AC	2	1,250	36	45,000	11/19/21	19	39	53	8	New Construction - Initial	1/1/80
ASHAVE	10120	ASH AVE	BASQUE AVE	LEE AVE	E	1	AC	2	700	36	25,200	4/23/25	19	86	6	8	Surface Treatment - Slurry Seal	7/1/12
GRNHLL	13750	GREENHILL DR	POST RD	END	E	8	AC	2	945	32	32,240	4/17/25	19	61	34	5	New Construction - Initial	1/1/80
RICHMN	18480	RICHMAN AVE	SUNNYCREST DR	RICHMAN KNOLL	E	7	AC	2	1,125	32	36,000	4/9/25	20	86	14	0	New Construction - Initial	1/1/80
EDGCLF	12630	EDGECLIFF DR	KROEGER AVE	RAYMOND AVE	E	5	AC	2	430	32	13,760	1/6/21	20	82	12	6	New Construction - Initial	1/1/80
CONCOR	11890	CONCORD AVE	VIRGINIA RD	END	E	5	AC	2	660	32	21,120	11/24/20	20	89	8	3	New Construction - Initial	1/1/80
ELMAVE	12830	ELM AVE	LOCUST AVE	PACIFIC DR	E	1	AC	2	820	32	26,240	3/25/25	20	70	22	8	Surface Treatment - Slurry Seal	7/1/12
FULRNC	13430	FULLERTON CREEK DR	SYCAMORE AVE	YORBA LINDA BLVD	E	5	AC	2	850	32	27,200	12/22/20	20	72	28	0	New Construction - Initial	1/1/80
AVESEL	10360	AVENIDA SELVA	CALLE CANDELA	END	E	8	AC	2	292	32	9,344	4/22/25	20	70	24	6	New Construction - Initial	1/1/80
MAXZIM	16480	MAXZIM AVE	EADINGTON AVE	BASQUE AVE	E	1	AC	2	965	32	30,880	4/11/23	20	72	4	24	Surface Treatment - Slurry Seal	7/1/12
MADERA	16120	MADERA PL	END	TERRAZA PL	E	6	AC	2	520	32	16,640	1/6/21	20	70	18	12	New Construction - Initial	1/1/80
SNTIGO	19350	SANTIAGO RD	N END	BEECHWOOD AVE	E	5	AC	2	425	32	13,600	12/22/20	20	68	26	6	New Construction - Initial	1/1/80
DOMNGR	12430	DOMINGO RD	TERRAZA PL	SANTA BARBARA AVE	E	6	AC	2	1,840	32	58,880	12/11/20	20	87	5	8	New Construction - Initial	1/1/80
LINDAV	15840	LINDA VISTA CIR	END	SKYLINE DR	E	5	AC	2	300	32	9,600	12/3/20	20	81	19	0	New Construction - Initial	1/1/80
TARYTN	20076	TARRYTOWN DR	CARLETON WY	E END	E	8	AC	2	365	32	11,680	4/17/25	20	67	23	10	New Construction - Initial	1/1/80
PINEDR	17894	PINE DR	PORTER AVE	ORANGETHORPE AVE (FRONTAGE)	E	1	AC	2	230	32	7,360	4/12/23	20	86	13	1	Surface Treatment - Slurry Seal	7/1/12
CARLET	11460	CARLETON WAY	GREENHILL DR	TRIESTE WAY	E	8	AC	2	1,000	32	32,000	4/17/25	20	71	23	6	New Construction - Initial	1/1/80
ASHAVE	10133	ASH AVE	ANZA PL	CITRUS AVE	E	1	AC	2	333	36	11,988	3/19/25	20	80	0	20	Surface Treatment - Slurry Seal	7/1/12
MARPSA	16390	MARIPOSA LN	LAS LANAS LN	PARKS RD	E	8	AC	2	920	32	29,440	4/23/25	20	60	40	0	New Construction - Initial	1/1/80
PIONEA	17950	PIONEER AVE	BURNING TREE RD	SUNNY RIDGE DR	E	8	AC	2	1,279	32	9,760	4/17/25	20	62	36	2	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
CAMIVI	11280	CAMINO LA VISTA	MESA VERDE	GRISSOM PARK DR	E	8	AC	2	261	32	8,352	4/22/25	20	59	32	9	New Construction - Initial	1/1/80
FOXDR	13350	FOX DR	END	VALENCIA MESA DR	E	7	AC	2	340	32	10,880	4/9/25	20	64	25	11	New Construction - Initial	1/1/80
RAINTR	18280	RAINTREE RD	VALENCIA MESA DR	END	E	7	AC	2	405	30	12,150	4/23/25	21	57	35	8	New Construction - Initial	1/1/80
ALBERT	6070	ALBERTA PL	GREGORY AVE	COMMONWEALTH AVE	E	7	AC	2	135	26	3,510	4/2/25	21	50	35	15	New Construction - Initial	1/1/80
GAGEAV	13455	GAGE AVE	EADINGTON AVE	BASQUE AVE	E	1	AC	2	970	32	31,040	4/17/23	21	90	3	7	Surface Treatment - Slurry Seal	7/1/12
GREGRY	13790	GREGORY AVE	CHAPMAN AVE	ADLENA DR	E	7	AC	2	1,540	32	49,280	4/2/25	21	73	14	13	New Construction - Initial	1/1/80
ANITA	8090	ANITA PL	END	MIRAMAR DR	E	5	AC	2	245	32	7,840	12/22/20	21	75	25	0	New Construction - Initial	1/1/80
LOVRNG	16090	LOVERING AVE	BAKER AVE	HOUSTON AVE	E	1	AC	2	700	32	22,400	4/11/23	21	85	15	0	Surface Treatment - Slurry Seal	7/1/12
BRENTW	10860	BRENTWOOD DR	END	PANORAMA RD	E	5	AC	2	297	32	9,504	12/15/20	21	90	7	3	New Construction - Initial	1/1/80
MARTHA	16420	MARTHA PL	GREGORY AVE	END	E	7	AC	2	125	32	4,000	4/2/25	21	94	6	0	New Construction - Initial	1/1/80
ORANGE	17450	ORANGE AVE	CHAPMAN AVE	COMMONWEALTH AVE	E	7	AC	2	1,345	32	49,440	8/3/23	21	78	4	18	Complete Reconstruction - AC	5/25/20
ORANFRON	50100	ORANGETHROPE (FRONTAGE)	ORCHARD AVE	CITRUS AVE	E	1	AC	2	680	26	17,680	4/17/23	21	89	11	0	New Construction - AC	1/1/80
MRMARP	16820	MIRAMAR PL	END	RAYMOND AVE	E	5	AC	1	220	32	7,040	1/6/21	21	76	14	10	New Construction - Initial	1/1/80
VISLOM	20870	VISTA LOMITAS DR	VISTA DEL MAR	END	E	5	AC	2	424	32	13,568	1/6/21	21	87	8	5	New Construction - Initial	1/1/80
MICHAL	16660	MICHAEL AVE	END	AMERIGE AVE	E	7	AC	2	205	26	5,330	4/1/25	22	82	5	13	New Construction - Initial	1/1/80
RUSSLL	19020	RUSSELL AVE	CHAPMAN AVE	WILSHIRE AVE	E	7	AC	2	505	26	13,130	4/1/25	22	71	11	18	New Construction - Initial	1/1/80
ELDORA	12680	EL DORADO DR	HIGHLAND AVE	VALLEY VIEW DR	E	7	AC	2	1,135	32	36,320	4/8/25	22	78	12	10	New Construction - Initial	1/1/80
PINEDR	17892	PINE DR	OLIVE AVE	PORTER AVE	E	1	AC	2	765	32	24,480	4/12/23	22	86	14	0	Surface Treatment - Slurry Seal	7/1/12
EADING	12570	EADINGTON AVE	VALENCIA DR	FLOWER AVE	E	1	AC	2	1,275	32	40,800	4/17/25	22	55	33	12	Surface Treatment - Slurry Seal	7/1/12
ASHAVE	10100	ASH AVE	LOCUST DR	PACIFIC DR	E	1	AC	2	773	26	20,098	3/25/25	22	85	15	0	Surface Treatment - Slurry Seal	7/1/12
CEDAR	11580	CEDAR AVE	ORANGETHORPE AVE	BAKER AVE	E	1	AC	2	630	32	20,160	4/12/23	22	72	28	0	Surface Treatment - Slurry Seal	7/1/12
FRIAR	13400	FRIAR PL	CORONADO DR	END	E	6	AC	2	225	32	7,200	12/4/20	22	83	16	1	New Construction - Initial	1/1/80
LSLNSL	15490	LAS LANAS LN	CONEJO LN	PARKS RD	E	8	AC	2	1,681	32	53,792	4/23/25	22	61	36	3	New Construction - Initial	1/1/80
POSTRD	18090	POST RD	TRIESTE WAY	LARKWOOD DR	E	8	AC	2	815	32	26,080	4/17/25	22	60	27	13	New Construction - Initial	1/1/80
JULIE	14960	JULIE AVE	GREGORY AVE	END	E	7	AC	2	460	26	11,960	4/2/25	22	77	5	18	New Construction - Initial	1/1/80
LOCUST	15920	LOCUST DR	THOMAS WAY	CHAPMAN AVE	E	7	AC	2	660	26	17,160	4/2/25	22	67	5	28	New Construction - Initial	1/1/80
KELLOG	14985	KELLOG AVE	NORTH END	VALENCIA DR	E	7	AC	2	330	32	10,560	4/27/23	22	88	4	8	New Construction - Initial	1/1/80
FLOWER	13290	FLOWER AVE	CEDAR AVE	HAWTHORNE AVE	E	1	AC	2	800	32	25,600	4/18/23	22	91	6	3	Surface Treatment - Slurry Seal	7/1/12
BROOKD	10920	BROOKDALE PL	HARRINGTON DR	END	E	3	AC	2	519	27	14,013	12/6/21	22	90	8	2	New Construction - Initial	1/1/80
DOMNGP	12420	DOMINGO PL	DOMINGO RD	END	E	6	AC	2	200	32	6,400	1/6/21	22	85	8	7	New Construction - Initial	1/1/80
NEWLLP	17070	NEWELL PL	CHAPMAN AVE	WILSHIRE AVE	E	3	AC	2	525	26	13,650	11/19/21	22	54	41	5	New Construction - Initial	1/1/80
LAUTRC	15640	LAUTREC DR	END	VALWOOD DR	E	5	AC	2	270	32	8,640	1/6/21	22	82	17	1	New Construction - Initial	1/1/80
ELCAMI	12670	EL CAMINO DR	CERRITOS DR	RICHMAN AVE	E	7	AC	2	295	32	10,640	4/9/25	22	49	22	29	New Construction - Initial	1/1/80
WOODCR	21500	WOODCREST AVE	COURTNEY AVE	CEDAR AVE	E	1	AC	2	770	32	24,640	4/12/23	22	85	15	0	Surface Treatment - Slurry Seal	7/1/12
CASBLA	11520	CASA BLANCA DR	END	MALVERN AVE	E	2	AC	2	625	32	20,000	12/20/21	22	91	9	0	New Construction - Initial	1/1/80
VALMES	51002	VALENCIA MESA DR	SUNNY CREST DR	LAGUNA RD (ROUNDABOUT)	E	7	AC	2	375	53	19,875	4/23/25	23	50	44	6	New Construction - Initial	1/1/80
CARLET	11450	CARLETON WAY	PIONEER AVE	GREENHILL DR	E	8	AC	2	123	32	3,936	4/17/25	23	69	31	0	New Construction - Initial	1/1/80
FULRNC	13420	FULLERTON CREEK DR	MOUNTAIN VIEW PL	SYCAMORE AVE	E	5	AC	2	1,650	32	52,800	12/22/20	23	88	12	0	New Construction - Initial	1/1/80
NAPLES	17040	NAPLES PL	END	BAKER AVE	E	1	AC	2	170	32	5,440	4/17/23	23	95	5	0	Surface Treatment - Slurry Seal	7/1/12
MRMARP	16810	MIRAMAR PL	KROEGER AVE	END	E	5	AC	2	200	26	5,200	1/6/21	23	76	24	0	New Construction - Initial	1/1/80
TRIEST	20300	TRIESTE WAY	SUNNY RIDGE DR	CANDLEWOOD DR	E	8	AC	2	915	32	29,280	4/17/25	23	63	23	14	New Construction - Initial	1/1/80
ANZAPL	9020	ANZA PL	END	ASH AVE	E	1	AC	2	182	26	4,732	3/19/25	23	72	28	0	New Construction - Initial	1/1/80
NUTWOA	17215	NUTWOOD AVE	ACACIA AVE	HALE AVE	E	4	AC	2	1,085	32	34,720	4/15/25	23	59	39	2	New Construction - Initial	2/19/11
CITRUS	50130	CITRUS AVE	WOODCREST AVE	BAKER AVE	E	1	AC	2	507	32	16,224	4/17/23	23	88	9	3	Surface Treatment - Slurry Seal	7/1/12
HILLAV	14475	HILL AVE	END	JEFFERSON AVE	E	2	AC	2	125	32	4,000	12/1/21	23	81	0	19	Surface Treatment - Slurry Seal	7/1/12
LSRDDR	15570	LAS RIENDAS DR	W CITY LIMIT	END	E	6	AC	2	507	36	20,252	12/30/20	23	77	19	4	New Construction - Initial	1/1/80
THORN	20210	THORN PL	END	DEVONSHIRE AVE	E	4	AC	2	260	32	8,320	12/4/20	23	60	38	2	New Construction - Initial	1/1/80
GENEVA	13520	GENEVA PL	POST RD	END	E	8	AC	2	360	32	11,520	4/17/25	23	64	23	13	New Construction - Initial	1/1/80
PALISD	17620	PALISADES DR	PANORAMA RD	SMOKEWOOD AVE	E	5	AC	2	1,285	32	41,120	12/15/20	23	82	14	4	New Construction - Initial	1/1/80
MESVRD	16620	MESA VERDE	CAMINO LA VISTA	E END	E	8	AC	2	340	32	10,880	4/22/25	23	48	41	11	New Construction - Initial	1/1/80
CRESVW	12110	CRESTVIEW DR	VALENCIA MESA DR	1085' S/ VALENCIA MESA DR	E	7	AC	2	1,087	25	27,175	12/22/21	23	45	26	29	New Construction - Initial	1/1/80
AVESOL	10370	AVENIDA SOLEDAD	END	MANZANITA DR	E	8	AC	2	643	32	20,576	4/22/25	23	50	43	7	New Construction - Initial	1/1/80
NUTWOA	17220	NUTWOOD AVE	HALE AVE	STATE COLLEGE BLVD	E	4	AC	2	1,542	32	49,344	4/15/25	23	53	37	10	New Construction - Initial	1/1/80
ROOSVT	18790	ROOSEVELT AVE	N END	CHAPMAN AVE	E	2	AC	2	230	26	5,980	12/20/21	24	89	11	0	New Construction - Initial	1/1/80
SANRAM	19180	SAN RAMON DR	MADONNA DR	END	E	6	AC	2	455	32	14,560	12/30/20	24	72	23	5	New Construction - Initial	1/1/80
WILSHR	21350	WILSHIRE AVE	WAYNE AVE	MICHAEL AVE	E	7	AC	2	760	32	24,320	4/23/25	24	62	21	17	New Construction - Initial	1/1/80
CANDLW	11370	CANDLEWOOD DR	END	LARKWOOD DR	E	8	AC	2	1,102	32	35,264	4/17/25	24	57	30	13	New Construction - Initial	1/1/80
RODEO	18700	RODEO RD	END	RICHMAN KNOLL	E	7	AC	2	495	32	15,840	4/9/25	24	75	16	9	New Construction - Initial	1/1/80
WESTAV	21150	WEST AVE	LOCUST AVE	BASQUE AVE	E	1	AC	2	1,890	32	60,480	4/23/25	24	69	17	14	Surface Treatment - Slurry Seal	7/1/12
BASQUE	10620	BASQUE AVE	HILL AVE	ORANGETHORPE AVE	E	1	AC	2	555	32	17,760	3/18/25	24	84	16	0	Surface Treatment - Slurry Seal	7/1/12
WILSHR	21370	WILSHIRE AVE	EUCLID ST	WOODS AVE	E	2	AC	2	1,290	32	41,280	12/2/21	24	87	13	0	New Construction - Initial	1/1/80
POTRRO	18100	POTRERO DR	LAS RIENDAS DR	LAS PALMAS DR	E	6	AC	2	695	32	22,240	12/30/20	24	83	17	0	New Construction - Initial	1/1/80
MIGUEL	16690	MIGUEL PL	END	DOMINGO RD	E	6	AC	2	600	32	19,200	12/4/20	24	68	14	18	New Construction - Initial	1/1/80
OVRLKR	17550	OVERLOOK RD	N END	PANORAMA RD	E	5	AC	2	215	32	6,880	1/6/21	24	58	42	0	New Construction - Initial	1/1/80
MESVRD	16630	MESA VERDE	CAMINO DEL SOL	END	E	8	AC	2	745	32	23,840	4/11/25	24	53	36	11	New Construction - Initial	1/1/80
ROBRTA	18635	ROBERTA AVE	GILBERT ST	PAGE AVE	E	1	AC	2	1,370	32	43,840	4/17/23	24	82	18	0	Surface Treatment - Slurry Seal	7/1/12
ROYER	19000	ROYER AVE	BAKER AVE	HOUSTON AVE	E	1	AC	2	715	32	22,880	4/11/23	24	74	16	10	Surface Treatment - Slurry Seal	7/1/12
WASGTN	21075	WASHINGTON AVE	ELM	ROSSLYNN AVE	E	2	AC	2	245	32	7,840	2/17/22	24	69	9	22	Surface Treatment - Slurry Seal	7/1/12
LIDOPL	15745	LIDO PL	CORONADO DR	END	E	6	AC	2	325	32	10,400	12/30/20	24	84	16	0	New Construction - Initial	1/1/80
ACACIA	5040	ACACIA AVE	VICTORIA DR	CHAPMAN AVE	E	4	AC	2	1,965	36	70,740	1/13/21	25	57	34	9	New Construction - Initial	1/1/80
LOCKLN	15910	LOCKLIN WAY	FAIRFORD DR	SUNNY RIDGE DR	E	8	AC	2	135	32	4,320	4/23/25	25	64	18	18	New Construction - Initial	1/1/80
DANAPL	12230	DANA PL	ACACIA AVE	END	E	5	AC	2	540	32	17,280	4/16/25	25	68	28	4	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
GLNVWD	13610	GLEN VIEW DR	RODEO RD	S END	E	7	AC	2	1,020	28	28,560	4/9/25	25	56	10	34	New Construction - Initial	1/1/80
LSLNSC	15480	LAS LANAS CIR	LAS LANAS LN	END	E	8	AC	2	130	32	4,160	4/23/25	25	56	42	2	New Construction - Initial	1/1/80
RUSSLL	19030	RUSSELL AVE	END	AMERIGE AVE	E	7	AC	2	200	26	5,200	4/1/25	25	73	27	0	New Construction - Initial	1/1/80
TRUMAN	20310	TRUMAN AVE	N END	CHAPMAN AVE	E	2	AC	2	190	26	4,940	12/20/21	25	91	9	0	New Construction - Initial	1/1/80
GROVE	13840	GROVE PL	HARRINGTON DR	MAERTIN LN	E	3	AC	2	1,060	32	33,920	12/6/21	25	92	8	0	New Construction - Initial	1/1/80
FERNDR	13090	FERN DR	ADELENA DR	BROOKDALE PL	E	7	AC	2	515	32	16,480	4/25/23	25	74	11	15	New Construction - Initial	1/1/80
LAGUNA	15300	LAGUNA RD	TERRAZA PL	MORELIA PL	E	6	AC	2	1,932	36	69,552	12/3/20	25	74	21	5	New Construction - Initial	1/1/80
MICHAL	16650	MICHAEL AVE	WILSHIRE AVE	END	E	7	AC	2	715	32	22,880	12/22/21	25	81	18	1	New Construction - Initial	1/1/80
CONEJO	11920	CONEJO LN	END	CAMINO LA VISTA	E	8	AC	2	555	32	17,760	4/22/25	25	68	27	5	New Construction - Initial	1/1/80
ROYALE	18990	ROYALE PL	SUNNY RIDGE DR	END	E	8	AC	2	540	32	17,280	4/22/25	25	64	28	8	New Construction - Initial	1/1/80
BAKER	10405	BAKER AVE	COURTNEY AVE	EAST END	E	1	AC	2	925	32	25,100	4/12/23	25	85	10	5	Surface Treatment - Slurry Seal	7/1/12
MAXZIM	16470	MAXZIM AVE	PACIFIC DR	EADINGTON AVE	E	1	AC	2	1,100	32	35,200	4/11/23	25	79	19	2	Surface Treatment - Slurry Seal	7/1/12
ELMAVE	12872	ELM AVE	WOODS AVE	RICHMAN AVE	E	2	AC	2	1,122	32	35,904	11/29/21	26	92	6	2	New Construction - Initial	1/1/80
SUNHLS	19895	SUNNY HILLS RD	W END	GLENMEADOW DR	E	6	AC	2	2,045	32	65,440	1/15/21	26	61	30	9	New Construction - Initial	1/1/80
TERAZA	20130	TERRAZA PL	DOMINGO RD	SANTA BARBARA AVE	E	6	AC	2	1,580	32	50,560	12/23/20	26	60	15	25	New Construction - Initial	1/1/80
ADLENA	6010	ADLENA DR	ADLENA PL	MALVERN AVE	E	7	AC	2	670	32	21,440	4/25/23	26	76	10	14	New Construction - Initial	1/1/80
HILLAV	14480	HILL AVE	ADAMS AVE	END	E	2	AC	2	130	32	4,160	12/1/21	26	75	0	25	Surface Treatment - Slurry Seal	7/1/12
HILLAV	14450	HILL AVE	END	PACIFIC	E	1	AC	2	570	32	18,240	3/25/25	26	57	29	14	Surface Treatment - Slurry Seal	7/1/12
LASMBR	15210	LA SOMBRA WAY	LAS PALMAS DR	END	E	6	AC	2	320	32	10,240	1/7/21	26	82	18	0	New Construction - Initial	1/1/80
PASDOR	17720	PASEO DORADO	DOMINGO RD	CAMINO LA VISTA	E	8	AC	2	805	32	25,760	4/18/25	26	54	37	9	New Construction - Initial	1/1/80
POSTRD	18095	POST RD	LARKWOOD DR	SUNNY RIDGE DR	E	8	AC	2	135	32	4,320	4/17/25	26	73	12	15	New Construction - Initial	1/1/80
ROOSVT	18820	ROOSEVELT AVE	MAPLEWOOD AVE	WEST AVE	E	2	AC	2	375	32	12,801	12/1/21	26	85	15	0	Surface Treatment - Slurry Seal	7/1/12
VALERA	20540	VALERA WAY	END	LA SENDA DR	E	6	AC	2	180	32	5,760	12/11/20	26	76	21	3	New Construction - Initial	1/1/80
JACARA	14780	JACARANDA PL	WANDA DR	CHAPMAN AVE	E	7	AC	2	1,345	26	34,970	4/2/25	26	89	5	6	New Construction - Initial	1/1/80
LAKESD	15320	LAKESIDE DR	END	HERMOSA DR	E	6	AC	2	1,660	32	53,120	12/23/20	26	86	10	4	New Construction - Initial	1/1/80
MIMOSA	16750	MIMOSA PL	MERLIN AVE	END	E	5	AC	2	420	32	13,440	12/4/20	26	74	14	12	New Construction - Initial	1/1/80
LADRVS	15270	LADERA VISTA DR	END	CHAPMAN AVE	E	4	AC	2	1,440	32	46,080	11/24/20	26	77	23	0	New Construction - Initial	1/1/80
SIMIPL	19510	SIMI PL	END	BAKER AVE	E	1	AC	2	160	32	5,120	4/12/23	26	89	11	0	Surface Treatment - Slurry Seal	7/1/12
NELSON	17050	NELSON PL	END	LAS PALMAS DR	E	6	AC	2	480	32	15,360	12/30/20	26	86	10	4	New Construction - Initial	1/1/80
WANDA	21025	WANDA DR	CHAPMAN AVE	END	E	7	AC	2	1,090	32	34,880	4/22/25	26	66	20	14	New Construction - Initial	1/1/80
BALCOM	10486	BALCOM AVE	WILSHIRE AVE	COMMONWEALTH AVE	E	3	AC	2	688	32	22,016	11/19/21	26	67	33	0	New Construction - Initial	1/1/80
COURTN	12040	COURTNEY AVE	MAXZIM AVE	HOUSTON AVE	E	1	AC	2	260	32	8,320	4/12/23	27	83	16	1	Surface Treatment - Slurry Seal	7/1/12
CAMISO	11250	CAMINO DEL SOL	ARMSTEAD LN	NICOLAS DR	E	8	AC	2	1,409	32	45,088	4/11/25	27	57	34	9	New Construction - Initial	1/1/80
MAPLWD	16290	MAPLEWOOD AVE	WOODS AVE	WEST AVE	E	2	AC	2	1,220	32	39,040	11/29/21	27	74	19	7	New Construction - Initial	1/1/80
MARPSA	16400	MARIPOSA LN	END	PASEO DORADO	E	8	AC	2	505	32	16,160	4/18/25	27	66	31	3	New Construction - Initial	1/1/80
OAKAVE	50160	OAK AVE	LOCUST DR	EADINGTON AVE	E	1	AC	2	283	32	9,056	3/25/25	27	72	28	0	Surface Treatment - Slurry Seal	7/1/12
MADNNA	16140	MADONNA DR	SAN RAMON DR	END	E	6	AC	1	1,055	32	33,760	12/23/20	27	76	22	2	New Construction - Initial	1/1/80
LEEAVE	15680	LEE AVE	AMERIGE AVE	END	E	7	AC	2	1,350	32	43,200	4/23/25	27	62	25	13	Surface Treatment - Slurry Seal	7/1/12
ORANFRON	9930	ORANGETHROPE (FRONTAGE)	BASQUE AVE	CITRUS AVE	E	1	AC	2	1,536	32	49,152	12/1/23	27	66	33	1	New Construction - AC	1/1/80
SWEET	20000	SWEET AVE	CHAPMAN AVE	AMERIGE AVE	E	7	AC	2	935	32	29,920	12/22/21	27	78	21	1	New Construction - Initial	1/1/80
PORTER	18040	PORTER AVE	LEE AVE	END	E	1	AC	2	1,280	32	40,960	4/21/25	27	52	43	5	Surface Treatment - Slurry Seal	7/1/12
VALVWD	20590	VALLEY VIEW DR	GRANDVIEW DR	RICHMAN AVE	E	7	AC	2	660	32	21,120	4/23/25	27	57	16	27	New Construction - Initial	1/1/80
OLIVE	17410	OLIVE AVE	CEDAR AVE	HAWTHORNE AVE	E	1	AC	2	700	32	22,400	4/18/23	27	69	15	16	Surface Treatment - Slurry Seal	7/1/12
OCNVWD	17330	OCEAN VIEW DR	GRANDVIEW AVE	GRANDVIEW AVE	E	2	AC	2	1,093	28	30,604	12/20/21	27	81	11	8	New Construction - Initial	1/1/80
FORDAV	13320	FORD AVE	GLENWOOD AVE	DEL MONTE WEST	E	2	AC	2	260	32	8,320	12/17/21	27	56	44	0	New Construction - Initial	1/1/80
DEVNSH	12390	DEVONSHIRE AVE	DEERPARK DR	HARTFORD AVE	E	4	AC	2	850	32	27,200	11/25/20	27	58	37	5	New Construction - Initial	1/1/80
GRSMPK	13810	GRISSOM PARK DR	PASEO GRANDE	MANZANITA DR	E	8	AC	2	1,981	32	69,120	4/22/25	27	48	40	12	New Construction - Initial	1/1/80
ISLAND	14740	ISLAND DR	N END	BURNING TREE RD	E	8	AC	2	1,440	32	46,080	3/26/25	27	47	46	7	New Construction - Initial	1/1/80
PACFIC	17600	PACIFIC DR	HILL AVE	ORANGETHORPE AVE	E	1	AC	2	425	32	13,600	3/25/25	27	59	14	27	Surface Treatment - Slurry Seal	7/1/12
WLMSON	21320	WILLIAMSON AVE	EUCLID ST	WOODS AVE	E	2	AC	2	1,290	32	41,280	12/1/21	27	89	11	0	New Construction - Initial	1/1/80
VIRGNA	20805	VIRGINIA RD	LUANNE AVE	SHEPPARD DR	E	5	AC	2	395	26	10,270	12/3/20	27	69	20	11	New Construction - Initial	1/1/80
HARTFD	14150	HARTFORD AVE	END	BASTANCHURY RD	E	4	AC	2	1,635	32	52,320	4/22/25	28	69	31	0	New Construction - Initial	1/1/80
CAMIVI	11288	CAMINO LA VISTA	ROSECRANS AVE	PASEO DORADO	E	8	AC	2	920	32	29,440	4/18/25	28	54	32	14	New Construction - Initial	1/1/80
ORANFRON	9915	ORANGETHROPE (FRONTAGE)	END w/o COURTNEY AVE	END e/o CEDAR AVE	E	1	AC	2	1,034	32	33,088	12/1/23	28	55	26	19	New Construction - AC	1/1/80
GAGEAV	13440	GAGE AVE	END	COURTNEY AVE	E	1	AC	2	400	32	12,800	4/12/23	28	75	20	5	Surface Treatment - Slurry Seal	7/1/12
JASMIN	14840	JASMINE AVE	END	FLOWER AVE	E	1	AC	2	230	26	5,980	4/12/23	28	95	5	0	Surface Treatment - Slurry Seal	7/1/12
HILLAV	14490	HILL AVE	WOODS AVE	RICHMAN AVE	E	2	AC	2	1,160	32	37,120	11/29/21	28	87	11	2	New Construction - Initial	1/1/80
MELODY	16570	MELODY LN	KENSINGTON DR	ACACIA AVE	E	5	AC	2	1,520	32	48,640	4/16/25	28	70	25	5	New Construction - Initial	1/1/80
MAXZIM	16485	MAXZIM AVE	BASQUE AVE	ORCHARD AVE	E	1	AC	2	915	32	29,280	4/11/23	28	88	5	7	Surface Treatment - Slurry Seal	7/1/12
PIONEA	17968	PIONEER AVE	LADERA VISTA DR	YORBA LINDA BL	E	5	AC	2	1,606	32	51,392	12/22/20	28	65	23	12	New Construction - Initial	1/1/80
ORANFRON	9900	ORANGETHROPE (FRONTAGE)	PACIFIC DR	END	E	1	AC	2	1,834	32	58,688	4/17/23	28	91	7	2	New Construction - AC	1/1/80
LINCOL	15810	LINCOLN AVE	CHAPMAN AVE	COMMONWEALTH AVE	E	3	AC	2	1,250	32	40,000	11/19/21	28	19	75	6	New Construction - Initial	1/1/80
CAMIMO	11330	CAMINO MONTE	CAMINO DEL SOL	END	E	8	AC	2	248	32	7,936	4/21/25	28	45	49	6	New Construction - Initial	1/1/80
MRMARD	16800	MIRAMAR DR	LINDENDALE AVE	END	E	5	AC	2	1,349	32	40,480	4/16/25	28	72	27	1	New Construction - Initial	1/1/80
SMKWDA	19610	SMOKEWOOD AVE	PANORAMA RD	S END	E	5	AC	2	975	32	31,200	12/15/20	28	52	48	0	New Construction - Initial	1/1/80
ELMIRA	12715	EL MIRADOR DR	PUENTE ST	W END	E	6	AC	2	110	33	3,630	12/15/20	28	69	31	0	New Construction - Initial	1/1/80
BURWOD	11030	BURWOOD ST	LAS PALMAS DR	NORTHERN CITY LIMIT	E	6	AC	2	115	32	3,680	1/7/21	29	53	42	5	New Construction - Initial	1/1/80
ELMAVE	12860	ELM AVE	ORCHARD AVE	CITRUS AVE	E	1	AC	2	870	32	27,840	3/19/25	29	66	33	1	Surface Treatment - Slurry Seal	7/1/12
ROOSVT	18800	ROOSEVELT AVE	CHAPMAN AVE	S END	E	2	AC	2	280	26	7,280	12/20/21	29	89	11	0	New Construction - Initial	1/1/80
TERAZA	20140	TERRAZA PL	SANTA BARBARA AVE	RANCHO CIR	E	6	AC	2	1,460	32	46,720	12/23/20	29	69	11	20	New Construction - Initial	1/1/80
ORCHRD	17512	ORCHARD AVE	COMMONWEALTH AVE	CHAPMAN AVE	E	7	AC	2	690	32	22,080	12/22/21	29	71	27	2	New Construction - Initial	1/1/80
SHADOW	19430	SHADOW LN	END	LEMON ST	E	5	AC	2	565	32	18,080	12/15/20	29	70	15	15	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
AVESOL	10380	AVENIDA SOLEDAD	MANZANITA DR	N END	E	8	AC	2	736	32	23,552	4/22/25	29	57	34	9	New Construction - Initial	1/1/80
ROSSLN	18985	ROSSLYNN AVE	ACACIA AVE	END	E	4	AC	2	920	32	29,440	3/25/25	29	68	32	0	Surface Treatment - Slurry Seal	5/25/20
ORCHRD	17530	ORCHARD AVE	HILL AVE	ORANGETHORPE AVE	E	1	AC	2	560	32	17,920	3/18/25	29	87	13	0	Surface Treatment - Slurry Seal	7/1/12
DELPHN	12350	DELPHINE PL	END	FERN DR	E	7	AC	2	330	26	8,580	4/25/23	29	68	14	18	New Construction - Initial	1/1/80
CELEST	11590	CELESTE LN	PARKS RD	CONEJO LN	E	8	AC	2	1,417	32	45,344	4/23/25	29	58	37	5	New Construction - Initial	1/1/80
SKYLNW	19590	SKYLINE WAY	SKYLINE DR	END	E	5	AC	2	1,140	26	29,640	4/15/25	29	70	24	6	New Construction - Initial	1/1/80
PORTER	18070	PORTER AVE	WOODS AVE	HIGHLAND AVE	E	2	AC	2	2,435	32	77,920	11/29/21	29	73	18	9	New Construction - Initial	1/1/80
CAMEO	11190	CAMEO LN	QUARTZ LN	MADISON AVE	E	4	AC	2	798	37	29,526	4/21/25	29	49	27	24	New Construction - Initial	1/1/80
UNION	20400	UNION AVE	GLENWOOD DR	WOODS AVE	E	2	AC	2	372	32	13,404	12/20/21	29	79	20	1	New Construction - Initial	1/1/80
OVRLKR	17560	OVERLOOK RD	PANORAMA RD	S END	E	5	AC	2	730	32	23,360	12/22/20	29	88	11	1	New Construction - Initial	1/1/80
WOODSA	21580	WOODS AVE	VALENCIA DR	ASH AVE	E	2	AC	2	605	32	19,360	11/29/21	29	86	11	3	Reconstruct Surface (AC)	7/1/13
YALEAV	21630	YALE AVE	CHAPMAN AVE	COMMONWEALTH AVE	E	3	AC	2	1,220	32	39,040	11/19/21	29	19	81	0	New Construction - Initial	1/1/80
DOMNGR	12440	DOMINGO RD	SANTA BARBARA AVE	LAGUNA RD	E	6	AC	2	1,867	32	59,744	12/11/20	29	63	28	9	New Construction - Initial	1/1/80
ORCHRD	17539	ORCHARD AVE	BAKER AVE	HOUSTON AVE	E	1	AC	2	750	32	24,000	4/11/23	29	83	17	0	Surface Treatment - Slurry Seal	7/1/12
MANZNT	16250	MANZANITA DR	CAMINO REY	CAMINO DEL SOL	E	8	AC	2	1,690	32	54,080	4/22/25	30	44	41	15	New Construction - Initial	1/1/80
FORDAV	13336	FORD AVE	WILSHIRE AVE	AMERIGE AVE	E	2	AC	2	350	32	11,200	12/22/21	30	54	36	10	New Construction - Initial	1/1/80
SKYCRT	19530	SKYCREST DR	SKYLINE WAY	END	E	5	AC	2	525	26	13,650	1/6/21	30	78	13	9	New Construction - Initial	1/1/80
ODELL	17340	ODELL PL	GREGORY AVE	END	E	7	AC	2	235	26	6,110	4/2/25	30	88	7	5	New Construction - Initial	1/1/80
STANFD	19760	STANFORD AVE	CHAPMAN AVE	WILSHIRE AVE	E	3	AC	2	535	32	17,120	11/19/21	30	0	97	3	New Construction - Initial	1/1/80
TARYTN	20073	TARRYTOWN DR	POST RD	CARLETON WY	E	8	AC	2	535	32	17,120	4/17/25	30	61	32	7	New Construction - Initial	1/1/80
MALDEN	16190	MALDEN AVE	UNION AVE	CHAPMAN AVE	E	2	AC	2	1,290	32	41,280	12/2/21	30	70	25	5	New Construction - Initial	1/1/80
CIENAG	11750	CIENAGA DR	MADONNA DR	PUENTE ST	E	6	AC	2	1,170	32	37,440	12/23/20	30	76	16	8	New Construction - Initial	1/1/80
XIMENO	21610	XIMENO DR	NIETO PL	TERMINO PL	E	6	AC	2	890	32	28,480	12/23/20	30	79	21	0	New Construction - Initial	1/1/80
WESTAV	21160	WEST AVE	BASQUE AVE	LEE AVE	E	1	AC	2	685	32	21,920	3/19/25	30	58	42	0	Surface Treatment - Slurry Seal	7/1/12
BASQUE	50200	BASQUE AVE	ORANGETHORPE AVE	WOODCREST AVE	E	1	AC	2	270	32	8,640	4/17/23	30	86	6	8	Surface Treatment - Slurry Seal	7/1/12
ATHENA	10280	ATHENA PL	POST RD	END	E	8	AC	2	347	32	11,104	4/17/25	30	58	27	15	New Construction - Initial	1/1/80
PINEDR	17890	PINE DR	OAK AVE	OLIVE AVE	E	1	AC	2	708	32	23,956	3/25/25	30	60	12	28	Surface Treatment - Slurry Seal	7/1/12
TURNER	20375	TURNER AVE	EOP	WHITAKER ST	E	7	AC	2	155	32	4,960	4/27/23	30	65	35	0	New Construction - Initial	1/1/80
WILSON	21450	WILSON AVE	MELODY LN	S END	E	5	AC	2	315	32	10,080	4/21/25	30	60	40	0	New Construction - Initial	1/1/80
ADLENA	6000	ADLENA DR	VALLEY VIEW DR	ADLENA PL	E	7	AC	2	1,650	32	52,800	4/25/23	30	75	12	13	New Construction - Initial	1/1/80
POSTRD	18080	POST RD	GREENHILL RD	TARRYTOWN DR	E	8	AC	2	790	32	25,280	4/17/25	31	54	40	6	New Construction - Initial	1/1/80
PASGRN	17740	PASEO GRANDE	GRISSOM PARK DR	MANZANITA DR	E	8	AC	2	870	32	27,840	4/22/25	31	47	44	9	New Construction - Initial	1/1/80
LOCUST	15935	LOCUST DR	OAK AVE	SOUTHGATE AVE	E	1	AC	2	1,070	32	34,240	3/25/25	31	45	23	32	Surface Treatment - Slurry Seal	7/1/12
THOMAS	20170	THOMAS WAY	LOCUST AVE	ADLENA DR	E	7	AC	2	680	26	17,680	4/23/25	31	69	14	17	New Construction - Initial	1/1/80
BARONE	10560	BARONET PL	KINGHAM WAY	END	E	8	AC	2	616	32	19,712	4/22/25	31	53	40	7	New Construction - Initial	1/1/80
AMERIG	7080	AMERIGE AVE	ORCHARD AVE	ORANGE AVE	E	7	AC	2	1,230	32	39,360	12/22/21	31	48	28	24	New Construction - Initial	1/1/80
LATRVA	15220	LA TRAVESIA DR	COUNTRY HILLS DR	LA SENDA DR	E	6	AC	2	880	32	28,160	12/11/20	31	70	21	9	New Construction - Initial	1/1/80
RIDGVW	18580	RIDGE VIEW TERR	SKYLINE DR	END	E	5	AC	2	354	26	11,204	1/6/21	31	80	17	3	New Construction - Initial	1/1/80
ROSEHG	18900	ROSEHEDGE DR	LAS RIENDAS DR	SUNNY HILLS RD	E	6	AC	2	635	32	20,320	12/23/20	31	68	28	4	New Construction - Initial	1/1/80
REDWLW	18430	RED WILLOW RD	GALLIO DR	BURING TREE RD	E	8	AC	2	705	32	22,560	3/26/25	31	66	25	9	New Construction - Initial	1/1/80
OLINST	17370	OLIN ST	VALENCIA DR	FRANKLIN AVE	E	1	AC	2	396	32	12,672	4/20/23	31	76	21	3	Surface Treatment - Slurry Seal	7/1/12
ROOSVT	18830	ROOSEVELT AVE	KNEPP AVE	SOUTHGATE AVE	E	2	AC	2	240	32	7,680	12/1/21	31	73	17	10	Surface Treatment - Slurry Seal	7/1/12
DELCER	12300	DEL CERRO PL	POTRERO AVE	DEL CERRO PL	E	6	AC	2	350	32	11,200	12/30/20	31	59	18	23	New Construction - Initial	1/1/80
JEFRSN	14850	JEFFERSON AVE	CHAPMAN AVE	WILSHIRE AVE	E	2	AC	2	540	32	17,280	12/20/21	32	69	27	4	New Construction - Initial	1/1/80
MERLIN	16600	MERLIN AVE	ROLLING HILLS DR	END	E	5	AC	2	990	32	31,680	12/4/20	32	70	25	5	New Construction - Initial	1/1/80
TIFFNY	20220	TIFFANY PL	FAIRGREEN DR	END	E	8	AC	2	505	32	16,160	4/23/25	32	48	43	9	New Construction - Initial	1/1/80
ADLENP	6040	ADLENA PL	BASTANCHURY AVE	ADLENA DR	E	7	AC	2	160	32	5,120	4/25/23	32	61	27	12	New Construction - Initial	1/1/80
CLEACR	11860	CLEAR CREEK DR	END	ISLAND DR	E	8	AC	2	1,570	32	50,240	3/26/25	32	52	37	11	New Construction - Initial	1/1/80
CHERRY	11710	CHERRY AVE	CEDAR AVE	HAWTHORNE AVE	E	1	AC	2	700	32	22,400	4/18/23	32	79	21	0	Surface Treatment - Slurry Seal	7/1/12
LVEOAK	15890	LIVE OAK AVE	LARK ELLEN DR	ROLLING HILLS DR	E	5	AC	2	1,275	32	40,800	4/22/25	32	75	20	5	New Construction - Initial	1/1/80
CALULT	11130	CALLE ULTIMO	END	CALLE SERENA	E	8	AC	2	176	32	5,632	4/21/25	32	41	59	0	New Construction - Initial	1/1/80
DALEPL	12170	DALE PL	ARTESIA AVE	END	E	7	AC	2	210	32	6,720	3/26/25	32	44	56	0	New Construction - Initial	1/1/80
CONCOR	11900	CONCORD AVE	END	SYCAMORE AVE	E	4	AC	2	1,170	32	37,440	11/24/20	32	62	37	1	New Construction - Initial	1/1/80
HERMSD	14240	HERMOSA DR	LAKEVIEW DR	HARBOR BL	E	6	AC	2	1,755	27	47,385	1/7/21	32	65	30	5	New Construction - Initial	1/1/80
CIENAG	11740	CIENAGA DR	ARAGON PL	TERMINO PL	E	6	AC	2	1,760	32	56,320	12/23/20	32	71	29	0	New Construction - Initial	1/1/80
AVEDOS	10340	AVENIDA DEL OSSA	END	CAMINO CENTROLOMA	E	8	AC	2	500	32	16,000	4/21/25	32	51	46	3	New Construction - Initial	1/1/80
OAKAVE	17290	OAK AVE	ADAMS AVE	END	E	2	AC	2	160	32	5,120	2/17/22	33	66	22	12	Surface Treatment - Slurry Seal	7/1/12
CHAPMA	11670	CHAPMAN AVE	EUCLID ST	WOODS AVE	E	2	AC	2	1,275	32	40,800	12/20/21	33	81	10	9	New Construction - Initial	1/1/80
GLNWOD	13640	GLENWOOD AVE	W END	PRINCETON AVE	E	3	AC	2	360	32	14,270	11/17/21	33	82	9	9	New Construction - Initial	1/1/80
FAIRFD	13050	FAIRFORD DR	TIFFANY PL	FAIRGREEN DR	E	8	AC	2	1,590	32	50,880	4/23/25	33	53	41	6	New Construction - Initial	1/1/80
IVYPL	14770	IVY PL	END	DEVONHIRE AVE	E	4	AC	2	180	32	5,760	12/4/20	33	52	43	5	New Construction - Initial	1/1/80
PRTCRD	18170	PRITCHARD AVE	END	COMMONWEALTH AVE	E	7	AC	2	1,000	32	32,000	4/25/23	33	68	22	10	New Construction - Initial	1/1/80
RAYMER	18350	RAYMER AVE	AIRPARK DR	GILBERT ST	E	8	AC	2	735	40	29,400	4/25/23	33	51	23	26	New Construction - Initial	1/1/80
ORCHRD	17520	ORCHARD AVE	ELM AVE	OLIVE AVE	E	1	AC	2	245	32	7,840	3/19/25	33	59	33	8	New Construction - Initial	1/1/80
SUNRDG	19910	SUNNY RIDGE DR	ROSECRANS AVE	LOCKLIN WAY	E	8	AC	2	1,312	36	47,232	4/22/25	33	56	34	10	New Construction - Initial	1/1/80
SUNRDG	19920	SUNNY RIDGE DR	LOCKLIN WAY	PIONEER AVE	E	8	AC	2	1,523	32	48,736	4/22/25	33	52	48	0	New Construction - Initial	1/1/80
DELHI	12340	DELHI PL	END	ASH AVE	E	1	AC	2	170	32	5,440	3/19/25	33	81	19	0	New Construction - Initial	1/1/80
VERONA	20680	VERONA DR	PASEO DORADO	DOMINGO RD	E	6	AC	2	285	32	9,120	12/30/20	33	60	18	22	New Construction - Initial	1/1/80
AVEDNO	10330	AVENIDA DEL NORTE	END	PARKS RD	E	8	AC	2	415	32	13,280	4/11/25	33	29	70	1	New Construction - Initial	1/1/80
WALDO	20895	WALDO AVE	NORTH END	VALENCIA DR	E	7	AC	2	490	32	15,680	4/27/23	33	78	17	5	New Construction - Initial	1/1/80
ARTESI	10060	ARTESIA AVE	PRITCHARD AVE	GILBERT ST	E	7	AC	2	1,650	39	64,350	4/25/23	33	48	33	19	New Construction - Initial	1/1/80
FERNDR	13130	FERN DR	WOODS AVE	RICHMAN AVE	E	2	AC	2	1,310	32	41,920	12/2/21	33	70	26	4	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
MAPLWD	16280	MAPLEWOOD AVE	ROOSEVELT AVE	WOODS AVE	E	2	AC	2	1,110	32	35,520	12/1/21	33	87	13	0	Surface Treatment - Slurry Seal	7/1/12
LOVELL	16070	LOVELL PL	W END	TWILIGHT DR	E	6	AC	2	145	32	4,640	12/30/20	33	37	36	27	New Construction - Initial	1/1/80
COURTN	12030	COURTNEY AVE	ORANGETHORPE AVE	ROBERTA AVE	E	1	AC	2	1,065	32	22,720	4/12/23	34	76	16	8	New Construction - Initial	1/1/80
WESTAV	21140	WEST AVE	COURTNEY AVE	BROOKHURST RD	E	1	AC	2	1,295	32	41,440	4/18/23	34	74	14	12	Surface Treatment - Slurry Seal	7/1/12
RIEDEL	18590	RIEDEL AVE	ALTO LN	DOROTHY LN	E	5	AC	2	1,285	32	41,120	12/15/20	34	79	17	4	New Construction - Initial	1/1/80
VALMES	20515	VALENCIA MESA DR	EUCLID AVE	GLENVIEW DR	E	7	AC	2	815	32	26,080	4/22/25	34	19	68	13	New Construction - Initial	1/1/80
GRNDVW	13690	GRANDVIEW AVE	FERN DR	VALLEY VIEW DR	E	7	AC	2	345	32	11,040	4/8/25	34	62	38	0	New Construction - Initial	1/1/80
RIEDEL	18600	RIEDEL AVE	DOROTHY LN	RIVERSIDE DR	E	3	AC	2	1,535	32	49,120	11/15/21	34	81	12	7	New Construction - Initial	1/1/80
CAMIRY	11360	CAMINO REY	AVENIDA SAN LORENZO	ROSECRANS AVE	E	8	AC	2	919	32	29,408	4/21/25	35	69	31	0	New Construction - Initial	1/1/80
ORANGE	17460	ORANGE AVE	ASH AVE	OLIVE AVE	E	1	AC	2	490	32	15,680	3/19/25	35	70	27	3	Surface Treatment - Slurry Seal	7/1/12
MILGRO	16710	MILAGRO WAY	END	LA TRAVESIA DR	E	6	AC	2	195	32	6,240	12/11/20	35	61	34	5	New Construction - Initial	1/1/80
SANDLW	19110	SANDALWOOD AVE	MERLIN AVE	END	E	5	AC	2	345	32	11,040	12/4/20	35	65	34	1	New Construction - Initial	1/1/80
GREGRY	13780	GREGORY AVE	PRITCHARD AVE	END	E	7	AC	2	325	32	10,400	4/25/23	35	47	53	0	New Construction - Initial	1/1/80
COURTN	12020	COURTNEY AVE	CHERRY AVE	ORANGETHORPE AVE	E	1	AC	2	775	32	24,800	4/18/23	35	68	19	13	Surface Treatment - Slurry Seal	7/1/12
COURTN	12015	COURTNEY AVE	OAK AVE	CHERRY AVE	E	1	AC	2	935	32	29,920	4/18/23	35	85	14	1	Surface Treatment - Slurry Seal	7/1/12
FLOWER	13300	FLOWER AVE	LOCUST AVE	LAMBERT AVE	E	1	AC	2	2,175	32	69,600	4/17/25	36	71	27	2	Surface Treatment - Slurry Seal	7/1/12
VALWOD	20620	VALWOOD DR	LONGVIEW DR	END	E	5	AC	2	1,995	32	63,840	1/13/21	36	53	35	12	New Construction - Initial	1/1/80
BURNTR	10980	BURNING TREE RD	CLEAR CREEK DR	ISLAND DR	E	8	AC	2	505	36	18,180	3/26/25	36	22	69	9	New Construction - Initial	1/1/80
PRNCTN	18116	PRINCETON AVE	CHAPMAN AVE	COMMONWEALTH AVE	E	3	AC	2	1,253	32	40,096	11/19/21	36	22	77	1	New Construction - Initial	1/1/80
FORDAV	13330	FORD AVE	END	CHAPMAN AVE	E	2	AC	2	1,090	32	34,880	12/22/21	36	55	45	0	New Construction - Initial	1/1/80
RAYMER	18360	RAYMER AVE	GILBERT ST	END	E	8	AC	2	1,635	38	62,130	4/25/23	36	46	37	17	New Construction - Initial	1/1/80
VALMES	20520	VALENCIA MESA DR	GLENVIEW DR	RICHMAN KNOLL	E	7	AC	2	1,175	32	37,600	4/23/25	36	30	50	20	New Construction - Initial	1/1/80
ORANFRON	9942	ORANGETHROPE (FRONTAGE)	WASHINTON AVE	WOODS AVE	E	2	AC	2	265	26	6,890	12/1/23	36	76	22	2	New Construction - AC	1/1/80
FULRNC	13410	FULLERTON CREEK DR	MELODY LN	MOUNTAIN VIEW PL	E	5	AC	2	700	32	22,400	12/22/20	36	65	35	0	New Construction - Initial	1/1/80
HILLAV	14470	HILL AVE	BASQUE AVE	CITRUS AVE	E	1	AC	2	1,605	32	51,360	4/21/25	37	58	42	0	Surface Treatment - Slurry Seal	7/1/12
BARBAR	10540	BARBARA BLVD	END	BREA BLVD	E	5	AC	2	1,136	36	40,896	12/11/20	37	65	29	6	New Construction - Initial	1/1/80
BERKEA	10750	BERKELEY AVE	CHAPMAN AVE	COMMONWEALTH AVE	E	3	AC	2	1,260	32	40,320	8/29/23	37	63	37	0	New Construction - Initial	1/1/80
GALLIO	13490	GALLIO DR	CLEAR CREEK DR	ISLAND DR	E	8	AC	2	425	32	13,600	3/26/25	37	70	30	0	New Construction - Initial	1/1/80
SOGATE	19630	SOUTHGATE AVE	CEDAR AVE	BROOKHURST AVE	E	1	AC	2	1,060	32	33,920	4/18/23	37	73	21	6	Surface Treatment - Slurry Seal	7/1/12
ROBRTA	18655	ROBERTA AVE	BASQUE AVE	ORCHARD AVE	E	1	AC	2	915	32	29,280	4/11/23	37	73	23	4	Surface Treatment - Slurry Seal	7/1/12
CORNEL	11950	CORNELL AVE	CHAPMAN AVE	COMMONWEALTH AVE	E	3	AC	2	1,245	32	39,840	11/19/21	37	0	93	7	Surface Treatment - Slurry Seal	6/1/24
BARONE	10570	BARONET PL	FARVIEW RD	END	E	8	AC	2	437	32	13,984	4/22/25	37	60	33	7	New Construction - Initial	1/1/80
FRANKH	13390	FRANKLIN HILLS DR	BURNING TREE RD	SUNNY RIDGE DR	E	8	AC	2	1,130	32	36,160	3/26/25	37	38	49	13	New Construction - Initial	1/1/80
DELMON	12315	DEL MONTE WEST	EL DORADO DR	FORD AVE	E	2	AC	2	491	32	15,712	12/17/21	37	36	63	1	New Construction - Initial	1/1/80
CAMIRY	11350	CAMINO REY	CAMINO DEL SOL	AVENIDA SAN LORENZO	E	8	AC	2	1,984	32	79,808	4/21/25	37	57	33	10	New Construction - Initial	1/1/80
LOVELL	16080	LOVELL PL	TWILIGHT DR	E END	E	6	AC	2	505	32	16,160	12/30/20	37	40	56	4	New Construction - Initial	1/1/80
FRANKN	13385	FRANKLIN AVE	OLIN ST	WEST END	E	1	AC	2	605	32	19,360	4/20/23	38	75	9	16	Surface Treatment - Slurry Seal	7/1/12
PIONEA	17960	PIONEER AVE	SUNNY RIDGE DR	AVENIDA SELVA	E	8	AC	2	1,100	32	35,200	4/17/25	38	54	40	6	New Construction - Initial	1/1/80
RAYMOA	18370	RAYMOND AVE	N END	SMOKEWOOD AVE	E	5	AC	2	170	32	5,440	1/6/21	38	33	67	0	New Construction - Initial	1/1/80
ELPASO	12740	EL PASO LN	CELESTE LN	PARKS RD	E	8	AC	2	845	32	27,040	4/23/25	38	43	54	3	New Construction - Initial	1/1/80
VICTRD	20750	VICTORIA DR	OLD CREEK LN	DOROTHY LN	E	5	AC	2	1,330	32	42,560	12/15/20	38	77	23	0	New Construction - Initial	1/1/80
PAULAA	17790	PAULA AVE	WEST AVE	FLOWER AVE	E	1	AC	2	860	26	22,360	4/20/23	38	89	9	2	Surface Treatment - Slurry Seal	7/1/12
SOGATE	19653	SOUTHGATE AVE	EUCLID AVE	JEFFERSON AVE	E	2	AC	2	495	32	15,840	12/1/21	38	74	23	3	New Construction - Initial	1/1/80
PRNCTN	18110	PRINCETON AVE	FERN DR	GLENWOOD AVE	E	3	AC	2	360	32	11,520	11/17/21	38	51	36	13	New Construction - Initial	1/1/80
CAMISO	11240	CAMINO DEL SOL	PARKS RD	ARMSTEAD LN	E	8	AC	2	2,072	32	66,304	4/11/25	38	48	46	6	New Construction - Initial	1/1/80
SHEPRD	19460	SHEPPARD DR	N END	VIRGINIA RD	E	5	AC	2	540	32	17,280	1/6/21	38	80	17	3	New Construction - Initial	1/1/80
ADLENA	6020	ADLENA DR	THOMAS WAY	CHAPMAN AVE	E	7	AC	2	460	26	11,960	4/23/25	38	72	25	3	New Construction - Initial	1/1/80
CAMICE	11230	CAMINO CENTROLOMA	MARIPOSA LN	PIONEER AVE	E	8	AC	2	486	32	15,552	4/21/25	38	48	46	6	New Construction - Initial	1/1/80
HRMNYP	14070	HARMONY PL	END	SHEPPARD DR	E	5	AC	2	225	32	7,200	1/6/21	38	71	29	0	New Construction - Initial	1/1/80
LSPLMS	15550	LAS PALMAS DR	TWILIGHT DR	PUENTE ST	E	6	AC	2	2,105	32	67,360	12/30/20	38	75	25	0	New Construction - Initial	1/1/80
ASHAVE	10136	ASH AVE	CITRUS AVE	EUCLID AVE	E	1	AC	2	672	36	24,192	4/23/25	38	68	20	12	Surface Treatment - Slurry Seal	7/1/12
DAPHNE	12250	DAPHNE PL	W END	GILBERT ST	E	8	AC	2	740	32	23,680	4/17/25	38	63	37	0	New Construction - Initial	1/1/80
ALTOLN	7030	ALTO LN	RIEDEL AVE	ACACIA AVE	E	5	AC	2	1,087	32	34,784	4/16/25	38	56	34	10	New Construction - Initial	1/1/80
HAWTHN	14190	HAWTHORNE AVE	FLOWER AVE	SOUTHGATE AVE	E	1	AC	2	765	32	24,480	4/18/23	38	69	31	0	Surface Treatment - Slurry Seal	7/1/12
ISLAND	14750	ISLAND DR	BURNING TREE RD	S END	E	8	AC	2	655	32	20,960	3/26/25	39	38	62	0	New Construction - Initial	1/1/80
PARKSR	17690	PARKS RD	CASTLEWOOD DR	AVENIDA DEL NORTE	E	8	AC	2	1,485	32	47,520	4/11/25	39	51	33	16	New Construction - Initial	1/1/80
FRANKN	13380	FRANKLIN AVE	MAGNOLIA AVE	OLIN ST	E	1	AC	2	620	32	19,840	4/20/23	39	61	11	28	Surface Treatment - Slurry Seal	7/1/12
LARIAT	15410	LARIAT PL	END	LAS RIENDAS DR	E	6	AC	2	200	32	6,400	1/7/21	39	63	36	1	New Construction - Initial	1/1/80
LSPLMS	15520	LAS PALMAS DR	RIDEOUT WAY	LAKEVIEW DR	E	6	AC	2	2,240	25	56,000	12/30/20	39	62	27	11	New Construction - Initial	1/1/80
PORTER	18050	PORTER AVE	ORCHARD AVE	CITRUS AVE	E	1	AC	2	540	32	17,280	3/18/25	39	87	13	0	Surface Treatment - Slurry Seal	7/1/12
YUCCA	21670	YUCCA AVE	END	LAGUNA RD	E	6	AC	2	2,235	32	71,520	4/18/25	39	51	37	12	New Construction - Initial	1/1/80
ORANFRON	9935	ORANGETHROPE (FRONTAGE)	END	BASQUE AVE	E	1	AC	2	2,209	26	57,434	12/1/23	39	42	57	1	New Construction - AC	1/1/80
THORN	20200	THORN PL	END	WINCHESTER ST	E	4	AC	2	470	32	15,040	12/4/20	39	64	33	3	New Construction - Initial	1/1/80
LADRVS	15260	LADERA VISTA DR	MELODY LN	END	E	5	AC	2	325	32	10,400	4/21/25	39	61	39	0	New Construction - Initial	1/1/80
PALOMA	17670	PALOMA PL	END	LAGUNA RD	E	6	AC	2	540	32	17,280	1/6/21	39	56	25	19	New Construction - Initial	1/1/80
SANMAR	19140	SAN MARCOS PL	END	CIENAGA DR	E	6	AC	2	175	32	5,600	12/10/20	39	70	30	0	New Construction - Initial	1/1/80
LNGVWD	16010	LONGVIEW DR	BREA BLVD	SKYLINE DR	E	5	AC	2	1,915	36	68,940	4/15/25	39	59	33	8	New Construction - Initial	1/1/80
NORMNP	17170	NORMAN PL	END	NUTWOOD AVE	E	3	AC	2	105	32	4,610	11/18/21	40	55	45	0	New Construction - Initial	1/1/80
KROEGR	15125	KROEGER AVE	MIRAMAR PL	MELODY LN	E	5	AC	2	892	32	28,544	4/16/25	40	50	50	0	New Construction - Initial	1/1/80
WAYNE	21090	WAYNE AVE	END	WILSHIRE AVE	E	7	AC	2	960	32	30,720	4/23/25	40	67	21	12	New Construction - Initial	1/1/80
ORCHRD	17538	ORCHARD AVE	WOODCREST AVE	BAKER AVE	E	1	AC	2	510	32	16,320	4/17/23	40	56	44	0	Surface Treatment - Slurry Seal	7/1/12
TERAZA	20120	TERRAZA PL	LAKESIDE DR	DOMINGO RD	E	6	AC	2	1,105	32	35,360	12/23/20	40	53	14	33	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
LAGUNA	15290	LAGUNA RD	EUCLID ST	TERRAZA PL	E	6	AC	2	1,415	32	45,280	12/23/20	40	64	29	7	New Construction - Initial	1/1/80
HRMNYL	14060	HARMONY LN	RIEDEL AVE	END	E	5	AC	2	1,130	32	36,160	4/16/25	40	58	33	9	New Construction - Initial	1/1/80
SUNRDG	19940	SUNNY RIDGE DR	CARMEL CIR	MALVERN AVE	E	8	AC	2	1,360	48	65,280	4/17/25	40	56	35	9	New Construction - Initial	1/1/80
SANMIG	19160	SAN MIGUEL DR	LAS RIENDAS DR	END	E	6	AC	2	445	32	14,240	12/1/20	40	49	42	9	New Construction - Initial	1/1/80
CITRUS	11790	CITRUS AVE	PORTER AVE	ORANGETHORPE AVE	E	1	AC	2	265	24	6,360	3/18/25	41	83	17	0	New Construction - Initial	1/1/80
NICLSD	17100	NICOLAS DR	END	CAMINO DEL SOL	E	8	AC	2	910	36	32,760	4/11/25	41	36	47	17	New Construction - Initial	1/1/80
BAKER	10400	BAKER AVE	COURTNEY AVE	CUL-DE-SAC (W)	E	1	AC	2	455	32	15,760	4/12/23	41	69	16	15	Surface Treatment - Slurry Seal	7/1/12
ADAMS	5070	ADAMS AVENUE	MAPLEWOOD AVE	OAK AVE	E	2	AC	2	500	32	16,000	2/17/22	41	78	22	0	Surface Treatment - Slurry Seal	7/1/12
VALVWD	20595	VALLEY VIEW DR	RICHMAN AVE	GLENHAVEN AVE	E	7	AC	2	365	32	11,680	4/8/25	41	75	12	13	New Construction - Initial	1/1/80
ARMSTE	10000	ARMSTEAD LN	END	CAMINO DEL SOL	E	8	AC	2	263	32	8,416	4/11/25	41	46	54	0	New Construction - Initial	1/1/80
VERONA	20670	VERONA DR	RANCHO CIR	PASEO DORADO	E	6	AC	2	2,205	32	70,560	12/3/20	41	51	38	11	New Construction - Initial	1/1/80
LADRVS	15250	LADERA VISTA DR	LADERA VISTA PL	PIONEER AVE	E	5	AC	2	800	26	20,800	4/16/25	41	50	46	4	New Construction - Initial	1/1/80
LIMEAV	15760	LIME AVE	EVERGREEN AVE	ROSALIA DR	E	5	AC	2	565	32	18,080	12/4/20	41	77	23	0	New Construction - Initial	1/1/80
KNSGTN	14990	KENSINGTON DR	HOLLYDALE DR	MELODY LN	E	5	AC	2	720	32	23,040	12/15/20	42	57	13	30	New Construction - Initial	1/1/80
UNION	20460	UNION AVE	MOUNTAIN VIEW PL	END	E	4	AC	2	315	32	10,080	11/24/20	42	64	36	0	New Construction - Initial	1/1/80
EVRGRN	13040	EVERGREEN AVE	MAPLE AVE	LIVE OAK AVE	E	5	AC	2	930	32	29,760	12/4/20	42	68	10	22	New Construction - Initial	1/1/80
VIRGNA	20840	VIRGINIA RD	VICTORIA DR	CONCORD AVE	E	5	AC	2	760	32	24,320	11/24/20	42	64	36	0	New Construction - Initial	1/1/80
WHTNGA	21260	WHITING AVE	STANFORD AVE	RAYMOND AVE	E	3	AC	2	450	28	12,600	11/19/21	42	27	67	6	New Construction - Initial	1/1/80
SANMIG	19150	SAN MIGUEL DR	END	CIENAGA DR	E	6	AC	2	245	32	7,840	12/10/20	42	66	30	4	New Construction - Initial	1/1/80
AVEDCO	10320	AVENIDA DEL CORTO	END	NICOLAS DR	E	8	AC	2	539	32	17,248	4/11/25	42	34	48	18	New Construction - Initial	1/1/80
WILSHR	21360	WILSHIRE AVE	RUSSELL AVE	MARIE AVE	E	7	AC	2	640	32	20,480	12/22/21	42	48	50	2	New Construction - Initial	1/1/80
FARVIW	13070	FARVIEW RD	FAIRGREEN DR	SUNNY RIDGE DR	E	8	AC	2	175	32	5,600	4/23/25	42	37	54	9	New Construction - Initial	1/1/80
AVEANT	10310	AVENIDA ANTIGUA	END	MANZANITA DR	E	8	AC	2	442	32	14,144	4/22/25	43	51	35	14	New Construction - Initial	1/1/80
HOUSTN	14650	HOUSTON AVE	PINE DR	KNUCKLE (100' E/ COURTNEY AVE)	E	1	AC	2	1,023	32	34,140	4/12/23	43	81	17	2	Surface Treatment - Slurry Seal	7/1/12
JENSEN	14915	JENSEN WAY	VALENCIA DR	OAK AVE	E	1	AC	2	860	32	27,520	4/20/23	43	87	9	4	Surface Treatment - Slurry Seal	7/1/12
ADAMS	5080	ADAMS AVENUE	OAK AVE	ELM AVE / S WOOD AVE	E	2	AC	2	350	32	11,200	2/17/22	43	55	19	26	Surface Treatment - Slurry Seal	7/1/12
YALEAV	21635	YALE AVE	COMMONWEALTH	WALNUT AVE	E	3	AC	2	685	32	21,920	11/19/21	43	54	46	0	New Construction - Initial	1/1/80
DANAPL	12210	DANA PL	NW END	LINDENDALE AVE	E	5	AC	2	1,070	32	34,240	12/22/20	43	60	37	3	New Construction - Initial	1/1/80
VALMES	20522	VALENCIA MESA DR	RICHMAN KNOLL	PEPPERTREE RD	E	7	AC	2	1,420	32	46,940	4/23/25	43	31	61	8	New Construction - Initial	1/1/80
SYCMRE	20031	SYCAMORE AVE	BROOKDALE PL	END	E	5	AC	2	994	32	37,305	4/21/25	43	63	22	15	New Construction - Initial	1/1/80
QUARTZ	50005	QUARTZ LN	BRADFORD AVE	END	E		AC	0	450	32	14,400	7/17/23	43	90	10	0	New Construction - Initial	1/1/10
LSPLMS	15540	LAS PALMAS DR	ALTURA DR	TWILIGHT DR	E	6	AC	2	1,572	32	69,280	1/15/21	43	63	36	1	New Construction - Initial	1/1/80
LSRDDR	15580	LAS RIENDAS DR	W END	TWILIGHT DR	E	6	AC	2	1,420	32	45,440	12/23/20	43	65	32	3	New Construction - Initial	1/1/80
PACFIC	17593	PACIFIC DR	OAK AVE	OLIVE AVE	E	1	AC	2	700	32	22,400	3/25/25	43	59	28	13	Surface Treatment - Slurry Seal	7/1/12
HILLAV	14510	HILL AVE	HIGHLAND AVE	HARBOR BLVD	E	2	AC	2	1,280	32	40,960	11/24/21	44	84	16	0	New Construction - Initial	1/1/80
PORTER	18030	PORTER AVE	GILBERT ST	COURTNEY AVE	E	1	AC	2	1,290	32	41,280	4/12/23	44	76	21	3	Surface Treatment - Slurry Seal	7/1/12
PAGEAV	17610	PAGE AVE	ROBERTA AVE	BROOKHURST RD	E	1	AC	2	1,362	32	26,880	4/17/23	44	55	45	0	Surface Treatment - Slurry Seal	7/1/12
ADAMS	5060	ADAMS AVENUE	CHAPMAN AVE	WILSHIRE AVE	E	2	AC	2	560	32	17,920	12/20/21	44	60	40	0	New Construction - Initial	1/1/80
LOCKLN	15915	LOCKLIN WAY	SUNNY RIDGE DR	BARONET PL	E	8	AC	2	150	32	4,800	4/22/25	44	50	49	1	New Construction - Initial	1/1/80
TARYTN	20070	TARRYTOWN DR	PIONEER AVE	POST RD	E	8	AC	2	140	32	4,480	4/17/25	44	61	38	1	New Construction - Initial	1/1/80
DANAPL	12240	DANA PL	END	MOUNTAIN VIEW PL	E	5	AC	2	520	32	16,640	12/10/20	44	72	26	2	New Construction - Initial	1/1/80
MRMARD	16795	MIRAMAR DR	HOLLYDALE DR	LINDENDALE AVE	E	5	AC	2	986	32	31,552	4/16/25	44	67	25	8	New Construction - Initial	1/1/80
AIRPAR	6050	AIRPARK DR	MOORE AVE	RAYMER AVE	E	8	AC	2	660	40	26,400	4/25/23	45	67	33	0	New Construction - Initial	1/1/80
MACART	16110	MAC ARTHUR AVE	PRITCHARD AVE	END	E	7	AC	2	125	32	4,000	4/25/23	45	65	35	0	New Construction - Initial	1/1/80
MARPSA	16380	MARIPOSA LN	CAMINO CENTROLOMA	END	E	8	AC	2	530	32	16,960	4/21/25	45	50	38	12	New Construction - Initial	1/1/80
VIABUR	20690	VIA BURTON	END	BAXTER ST / EASTERN CITY LIMIT	E	4	AC	2	560	32	17,920	1/6/21	45	72	23	5	New Construction - Initial	1/1/80
DEREK	12380	DEREK DR	END	SANTA CLARA AVE	E	4	AC	2	2,031	32	64,992	4/14/25	45	51	41	8	New Construction - Initial	1/1/80
MANHTN	16240	MANHATTAN AVE	ORANGETHORPE AVE	BURTON ST	E	3	AC	2	1,840	32	58,880	12/23/21	45	31	61	8	New Construction - Initial	1/1/80
SYCMRE	20005	SYCAMORE AVE	HALE AVE	FULLERTON CREEK DR	E	5	AC	2	135	32	4,320	12/10/20	45	33	43	24	New Construction - Initial	1/1/80
VALVWD	20585	VALLEY VIEW DR	WOODS AVE	GRANDVIEW DR	E	7	AC	2	652	32	20,864	4/8/25	46	83	14	3	New Construction - Initial	1/1/80
HILLAV	14460	HILL AVE	PACIFIC DR	END	E	1	AC	2	433	32	15,856	3/25/25	46	37	43	20	Surface Treatment - Slurry Seal	7/1/12
KNEPP	15080	KNEPP AVE	ROOSEVELT AVE	WOODS AVE	E	2	AC	2	1,175	32	37,600	12/1/21	46	64	34	2	Surface Treatment - Slurry Seal	7/1/12
BROOKD	10880	BROOKDALE PL	RICHMAN AVE	HIGHLAND AVE	E	2	AC	2	1,277	32	40,864	12/17/21	46	70	29	1	New Construction - Initial	1/1/80
FERNDR	13150	FERN DR	HORNET WAY	PRINCETON AVE	E	3	AC	2	670	32	21,440	11/17/21	46	55	40	5	New Construction - Initial	1/1/80
FLOWER	13270	FLOWER AVE	LINDY PL	GILBERT ST	E	1	AC	2	895	32	28,640	4/20/23	46	74	22	4	Surface Treatment - Slurry Seal	7/1/12
HALLAV	14000	HALL AVE	S END	ASH AVE	E	3	AC	2	180	32	5,760	2/17/22	46	91	9	0	New Construction - Initial	1/1/80
WESTAV	21190	WEST AVE	WOODS AVE	FORD AVE	E	2	AC	2	2,125	32	68,000	11/29/21	46	82	18	0	New Construction - Initial	1/1/80
NIETO	17120	NIETO PL	XIMENO DR	CIENAGA DR	E	6	AC	2	290	32	9,280	12/23/20	46	56	44	0	New Construction - Initial	1/1/80
BEECHW	10710	BEECHWOOD AVE	MERLIN AVE	END	E	5	AC	2	370	32	11,840	12/4/20	46	59	41	0	New Construction - Initial	1/1/80
ACACIA	5010	ACACIA AVE	VISTA DEL MAR DR	RIDGEMONT CT	E	5	AC	2	326	32	10,432	1/6/21	46	70	29	1	New Construction - Initial	1/1/80
CALMEL	11100	CALLE MELENO	END	CAMINO DEL SOL	E	8	AC	2	281	32	8,992	4/21/25	46	33	47	20	New Construction - Initial	1/1/80
ELLISP	12820	ELLIS PL	HARBOR BLVD	POMONA AVE	E	3	AC	2	600	28	16,800	2/17/22	46	18	48	34	New Construction - Initial	1/1/80
DOMNGR	12450	DOMINGO RD	LAGUNA RD	JOSE WAY	E	6	AC	2	1,190	32	38,080	12/3/20	46	53	35	12	New Construction - Initial	1/1/80
KNEPP	15090	KNEPP AVE	WOODS AVE	RICHMAN AVE	E	2	AC	2	1,170	32	37,440	11/29/21	47	72	25	3	New Construction - Initial	1/1/80
DOMNGR	12460	DOMINGO RD	JOSE WAY	TERRAZA PL	E	6	AC	2	1,430	32	45,760	12/30/20	47	39	49	12	New Construction - Initial	1/1/80
PARKSR	17700	PARKS RD	AVENIDA DEL NORTE	ROSECRANS AVE	E	8	AC	2	1,155	60	69,300	4/11/25	47	39	48	13	New Construction - Initial	1/1/80
SANPAB	19170	SAN PABLO DR	LAS RIENDAS DR	END	E	6	AC	2	400	32	12,800	12/30/20	47	70	29	1	New Construction - Initial	1/1/80
MELODY	16575	MELODY LN	ACACIA AVE	FULLERTON CREEK DR	E	5	AC	2	660	32	21,120	4/16/25	47	58	35	7	New Construction - Initial	1/1/80
JEFRSN	14870	JEFFERSON AVE	MAPLEWOOD AVE	ROSSLYNN AVE	E	2	AC	2	470	32	15,040	12/1/21	47	69	16	15	Surface Treatment - Slurry Seal	7/1/12
UNION	20420	UNION AVE	VISTA VERDE DR	HARBOR BL	E	2	AC	2	1,045	32	33,440	12/17/21	47	83	17	0	New Construction - Initial	1/1/80
SKYLND	19560	SKYLINE DR	RIDGE VIEW TERR	RAYMOND AVE	E	5	AC	2	1,705	32	54,560	1/13/21	47	53	38	9	New Construction - Initial	1/1/80
WESTAV	50050	WEST AVE	JENSEN WAY	GILBERT ST	E	1	AC	2	580	32	18,560	4/20/23	48	51	49	0	Surface Treatment - Slurry Seal	7/1/12

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
KNWOOD	15000	KENWOOD PL	END	RAYMOND AVE	E	5	AC	2	260	32	8,320	4/16/25	48	43	56	1	New Construction - Initial	1/1/80
SKINNR	19520	SKINNER PL	END	LAS RIENDAS DR	E	6	AC	2	250	32	8,000	1/7/21	48	49	51	0	New Construction - Initial	1/1/80
WESTAV	21176	WEST AVE	ALLEY W/ ROOSEVELT	ROOSEVELT AVE	E	2	AC	2	103	32	3,405	12/1/21	48	76	24	0	Surface Treatment - Slurry Seal	7/1/12
SOGATE	19660	SOUTHGATE AVE	WOODS AVE	RICHMAN AVE	E	2	AC	2	1,165	32	37,280	11/29/21	48	75	25	0	New Construction - Initial	1/1/80
CANNON	11385	CANNON LN	LUANNE AVE	SHEPPARD DR	E	5	AC	2	195	26	5,070	1/6/21	48	64	28	8	New Construction - Initial	1/1/80
CALCAN	11090	CALLE CANDELA	END	EL RANCHO VISTA	E	8	AC	2	807	32	25,824	4/22/25	48	55	34	11	New Construction - Initial	1/1/80
JACARA	14785	JACARANDA PL	ALLEY W/DIANA PL	WANDA DR	E	7	AC	2	721	26	18,746	4/1/25	48	78	22	0	New Construction - Initial	7/1/11
VALMES	20265	VALENCIA MESA DR	LAGUNA RD	HARBOR BL	E	7	AC	2	430	53	22,790	4/23/25	48	53	42	5	New Construction - Initial	1/1/80
SKYLND	19570	SKYLINE DR	RAYMOND AVE	MIRAMAR DR	E	5	AC	2	1,712	26	44,512	4/16/25	48	61	38	1	New Construction - Initial	1/1/80
DORTHD	12490	DOROTHY DR	END	HORNET WAY	E	3	AC	2	1,095	32	35,040	11/17/21	49	36	45	19	New Construction - Initial	1/1/80
ORCRDP	17540	ORCHARD PL	END	ASH AVE	E	1	AC	2	255	32	8,160	3/19/25	49	48	52	0	New Construction - Initial	1/1/80
SNTFEA	19290	SANTA FE AVE	SANTA CLARA AVE	DEREK DR	E	4	AC	2	1,495	32	47,840	2/27/25	49	73	10	17	New Construction - Initial	1/1/80
HORTON	14640	HORTON AVE	END	AMERIGE AVE	E	7	AC	2	225	32	7,200	4/1/25	49	88	12	0	New Construction - Initial	1/1/80
CYPRSA	12150	CYPRESS AVE	ALMIRA AVE	END	E	4	AC	2	290	24	6,960	1/6/21	49	85	15	0	New Construction - Initial	1/1/80
GAGEAV	50090	GAGE AVE	ORCHARD AVE	CITRUS AVE	E	1	AC	2	675	32	21,600	4/17/23	49	72	28	0	Surface Treatment - Slurry Seal	7/1/12
ROSRTA	18880	ROSARITA DR	PUENTE ST	NORTHERN CITY LIMIT	E	6	AC	2	550	38	20,900	12/15/20	49	61	39	0	New Construction - Initial	1/1/80
CASTLW	11530	CASTLEWOOD DR	GILBERT ST	PARKS RD	E	8	AC	2	1,295	32	41,440	4/22/25	49	26	73	1	New Construction - Initial	1/1/80
OLIVE	17420	OLIVE AVE	LOCUST AVE	LAMBERT AVE	E	1	AC	2	790	32	25,280	4/17/25	49	60	40	0	Surface Treatment - Slurry Seal	7/1/12
CENTRA	11615	CENTRAL AVE	ACACIA AVE	E END	E	4	AC	2	210	28	5,880	4/15/25	49	51	42	7	New Construction - Initial	1/1/80
OAKAVE	17280	OAK AVE	BASQUE AVE	CITRUS AVE	E	1	AC	2	1,870	32	59,840	4/21/25	49	65	35	0	Surface Treatment - Slurry Seal	7/1/12
RAYMOA	18390	RAYMOND AVE	SKYLINE DR	MELODY LN	E	5	AC	2	2,095	32	67,040	4/16/25	50	54	45	1	New Construction - Initial	1/1/80
BONITA	10835	BONITA PL	IMPERIAL HWY	CIENAGA DR	E	6	AC	2	429	36	15,444	12/23/20	50	25	75	0	New Construction - Initial	1/1/80
ORANFRON	9945	ORANGETHROPE (FRONTAGE)	WOODS AVE	RAY AVE	E	2	AC	2	2,029	32	64,928	4/8/24	51	58	32	10	New Construction - AC	1/1/80
PINEDR	17900	PINE DR	HOUSTON AVE	ROBERTA AVE	E	1	AC	2	360	32	12,320	4/12/23	51	71	16	13	Surface Treatment - Slurry Seal	7/1/12
ASHAVE	10130	ASH AVE	DELHI PL	ANZA PL	E	1	AC	2	290	36	10,440	4/23/25	51	68	31	1	Surface Treatment - Slurry Seal	7/1/12
CHERRY	11700	CHERRY AVE	PINE AVE	COURTNEY AVE	E	1	AC	2	990	32	31,680	4/12/23	51	65	28	7	Surface Treatment - Slurry Seal	7/1/12
SUNRDG	19930	SUNNY RIDGE DR	PIONEER AVE	CARMEL CIR	E	8	AC	2	1,870	32	59,840	4/17/25	51	44	46	10	New Construction - Initial	1/1/80
SHEPRD	19466	SHEPPARD DR	CANNON LN	DOROTHY LN	E	3	AC	2	510	32	16,320	11/17/21	51	58	40	2	New Construction - Initial	1/1/80
PINEDR	17902	PINE DR	ROBERTA AVE	NORTH END	E	1	AC	2	150	32	4,800	4/12/23	52	59	16	25	Surface Treatment - Slurry Seal	7/1/12
LWNWOD	15650	LAWNWOOD DR	COYOTE HILLS DR	WINTERWOOD DR	E	8	AC	2	320	32	10,240	4/11/25	52	42	57	1	New Construction - Initial	1/1/80
BURNTR	11005	BURNING TREE RD	MALVERN AVE	MOORE AVE	E	8	AC	2	750	32	24,000	3/26/25	52	0	95	5	New Construction - Initial	1/1/80
ALTURA	7050	ALTURA DR	LAS PALMAS DR	LAS PALMAS DR	E	6	AC	2	1,230	20	24,600	12/30/20	52	81	19	0	New Construction - Initial	1/1/80
ROCKY	18690	ROCKY RD	END	PIONEER AVE	E	5	AC	2	946	26	16,770	12/10/20	52	61	37	2	New Construction - Initial	1/1/80
OLINST	17375	OLIN ST	FRANKLIN AVE	SOUTH END	E	1	AC	2	240	32	7,680	4/20/23	52	69	30	1	Surface Treatment - Slurry Seal	7/1/12
MAERTN	16180	MAERTIN LN	VICTORIA DR	GROVE PL	E	4	AC	2	1,398	32	44,736	11/24/20	52	72	28	0	New Construction - Initial	1/1/80
LAMBRT	15375	LAMBERT DR	OAK AVE	PORTER AVE	E	1	AC	2	1,330	32	42,560	5/7/20	53	56	43	1	Surface Treatment - Slurry Seal	7/1/12
SKYLND	19550	SKYLINE DR	LONGVIEW DR	RIDGE VIEW TERR	E	5	AC	2	975	32	31,200	4/15/25	53	56	40	4	New Construction - Initial	1/1/80
ATHERT	10290	ATHERTON CIR	CAMINO DEL SOL	CAMINO DEL SOL	E	8	AC	2	1,098	32	35,136	4/11/25	53	48	51	1	New Construction - Initial	1/1/80
MAXZIM	16460	MAXZIM AVE	ROBERTA AVE	COURTNEY AVE	E	1	AC	2	860	32	27,520	4/12/23	53	75	17	8	Surface Treatment - Slurry Seal	7/1/12
FLOWER	13280	FLOWER AVE	PINE DR	COURTNEY AVE	E	1	AC	2	980	32	31,360	4/12/23	53	64	36	0	Surface Treatment - Slurry Seal	7/1/12
DAWNS	12260	DAWNS WAY	ACACIA AVE	END	E	4	AC	2	440	32	14,080	1/6/21	53	26	58	16	New Construction - Initial	1/1/80
HANSEN	14030	HANSEN AVE	END	WALLACE AVE	E	4	AC	2	1,005	32	32,160	12/10/20	54	72	28	0	Surface Treatment - Slurry Seal	5/25/20
TOPAZ	20260	TOPAZ LN	SAPPHIRE RD	BRADFORD AVE	E	4	AC	2	1,265	32	40,480	4/21/25	54	38	17	45	Surface Treatment - Slurry Seal	5/25/20
LAGUNA	15310	LAGUNA RD	MORELIA PL	BASTANCHURY RD	E	6	AC	3	1,515	36	54,540	12/30/20	54	87	11	2	New Construction - Initial	1/1/80
ELMAVE	12870	ELM AVE	ADAMS AVE	WASHINGTON AVE	E	2	AC	2	393	32	12,576	2/17/22	55	79	21	0	MILL and OVERLAY	7/1/13
BASTAN	10630	BASTANCHURY PL	BASTANCHURY RD	END	E	7	AC	2	85	68	5,780	4/9/25	55	20	45	35	New Construction - Initial	1/1/80
AMERIG	7090	AMERIGE AVE	ROOSEVELT AVE	DRAKE AVE	E	2	AC	2	1,610	36	57,960	12/1/21	55	77	23	0	New Construction - Initial	1/1/80
ARAGON	9040	ARAGON PL	END	CIENAGA DR	E	6	AC	2	305	32	9,760	4/18/25	55	62	38	0	Surface Treatment - Slurry Seal	5/25/20
BASQUE	50190	BASQUE AVE	WOODCREST AVE	BAKER AVE	E	1	AC	2	525	32	16,800	4/17/23	55	73	27	0	Surface Treatment - Slurry Seal	7/1/12
CEDAR	11570	CEDAR AVE	FLOWER AVE	SOUTHGATE AVE	E	1	AC	2	665	32	21,280	4/18/23	55	65	22	13	Surface Treatment - Slurry Seal	7/1/12
DELPHN	12360	DELPHINE PL	JACARANDA PL	CHAPMAN AVE	E	7	AC	2	580	26	15,080	4/1/25	56	67	33	0	New Construction - Initial	1/1/80
TERMNO	20110	TERMINO PL	XIMENO DR	CIENAGA DR	E	6	AC	2	260	32	8,320	4/18/25	56	42	42	16	Surface Treatment - Slurry Seal	5/25/20
MELVLE	16590	MELVILLE DR	MARION BLVD	MARION BLVD/AVALON DR	E	5	AC	2	1,100	32	35,200	12/22/20	56	54	42	4	New Construction - Initial	1/1/80
ACACIA	50000	ACACIA AVE	VISTA DEL MAR	MIRAMAR DR	E	5	AC	2	2,427	32	77,664	11/19/20	56	67	30	3	New Construction - AC	1/1/80
HICKRY	14310	HICKORY PL	HEATHER DR	END	E	5	AC	2	160	32	5,120	6/5/26	56	97	3	0	Surface Treatment - REAS	8/28/25
HEATHE	14200	HEATHER DR	N END	LARK ELLEN DR	E	5	AC	2	215	32	8,880	6/5/26	56	96	4	0	Surface Treatment - REAS	8/28/25
ANACAP	8070	ANACAPA PL	END	SANTA BARBARA AVE	E	6	AC	2	1,984	32	63,488	12/11/20	57	58	6	36	New Construction - Initial	1/1/80
LINDY	15870	LINDY PL	FLOWER AVE	OLIVE AVE	E	1	AC	2	275	26	7,150	4/20/23	57	71	29	0	Surface Treatment - Slurry Seal	7/1/12
WOODSA	21570	WOODS AVE	CHAPMAN AVE	COMMONWEALTH AVE	E	2	AC	2	1,436	32	45,952	12/2/21	57	69	31	0	New Construction - Initial	1/1/80
CITRUS	11800	CITRUS AVE	ORANGETHORPE AVE	WOODCREST AVE	E	1	AC	2	315	32	25,920	4/17/23	57	50	25	25	Surface Treatment - Slurry Seal	7/1/12
ROOSVT	18810	ROOSEVELT AVE	WILSHIRE AVE	COMMONWEALTH AVE	E	2	AC	2	665	32	21,280	12/20/21	57	67	33	0	New Construction - Initial	1/1/80
STATEFRONT	4240	STATE COLLEGE BLVD (FRONTAGE)	ALLEY n/o CLARKE AVE	BALFOUR AVE	E	4	AC	2	485	26	12,610	2/27/25	58	34	37	29	New Construction - Initial	1/1/86
PACFIC	17604	PACIFIC DR	GAGE AVE	ROBERTA AVE	E	1	AC	2	470	32	15,040	4/17/23	58	71	26	3	Surface Treatment - Slurry Seal	7/1/12
LINDA	15830	LINDA LN	SKYLINE DR	END	E	5	AC	2	325	32	10,400	12/3/20	58	56	31	13	New Construction - Initial	1/1/80
LSPLMS	15510	LAS PALMAS DR	LA TRAVESIA DR	RIDEOUT WAY	E	6	AC	2	1,895	32	60,640	12/3/20	58	76	24	0	New Construction - Initial	1/1/80
ASHAVE	10125	ASH AVE	LEE AVE	DELHI PL	E	1	AC	2	551	36	19,836	4/23/25	58	62	38	0	Surface Treatment - Slurry Seal	7/1/12
OAKAVE	17250	OAK AVE	PINE AVE	COURTNEY AVE	E	1	AC	2	1,005	32	32,160	4/12/23	59	52	32	16	Surface Treatment - Slurry Seal	7/1/12
CYPRSW	12160	CYPRESS WAY	STATE COLLEGE BLVD	END	E	4	AC	2	776	32	27,832	4/21/25	59	68	32	0	Surface Treatment - Slurry Seal	5/25/20
MOORE	16910	MOORE AVE	END	BURNING TREE RD	E	8	AC	2	880	38	35,000	4/25/23	59	0	96	4	New Construction - Initial	1/1/80
WASGTN	21070	WASHINGTON AVE	WEST AVE	ELM	E	2	AC	2	460	32	14,720	2/17/22	59	75	25	0	Surface Treatment - Slurry Seal	7/1/12
MAERTN	16170	MAERTIN LN	DOROTHY LN	END	E	4	AC	2	220	27	5,940	12/15/20	59	61	39	0	Surface Treatment - Slurry Seal	5/25/20
SANCAR	19080	SAN CARLOS DR	N END	COMMONWEALTH AVE	E	4	AC	2	740	43	31,820	4/14/25	59	56	43	1	Surface Treatment - Slurry Seal	5/25/20

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
DOMNGR	12470	DOMINGO RD	TERRAZA PL	VERONA DR	E	6	AC	2	770	32	24,640	12/30/20	59	22	31	47	New Construction - Initial	1/1/80
VALVWD	20600	VALLEY VIEW DR	HIGHLAND AVE	AVOLENCIA DR	E	7	AC	2	695	36	25,020	4/8/25	60	5	50	45	New Construction - Initial	1/1/80
ASHAVE	10180	ASH AVE	ELM AVE	RAYMOND AVE	E	3	AC	2	1,281	40	51,240	2/17/22	60	0	100	0	New Construction - Initial	1/1/80
STANFD	19740	STANFORD AVE	VIRGINIA RD	DOROTHY LN	E	5	AC	2	855	32	27,360	4/16/25	60	47	53	0	New Construction - Initial	1/1/80
ELMAVE	12940	ELM AVE	END	RAYMOND AVE	E	3	AC	2	1,180	32	37,760	2/17/22	60	0	100	0	New Construction - Initial	1/1/80
MRMARD	16790	MIRAMAR DR	SKYLINE DR	HOLLYDALE DR	E	5	AC	2	1,590	32	82,400	1/13/21	60	48	48	4	New Construction - Initial	1/1/80
WASGTN	21080	WASHINGTON AVE	KNEPP AVE	ORANGETHORPE AVE	E	2	AC	2	1,025	32	32,800	12/1/21	60	69	31	0	Surface Treatment - Slurry Seal	7/1/12
RICHMN	18530	RICHMAN AVE	ELM AVE	ORANGETHORPE AVE	E	2	AC	2	1,660	32	53,120	11/29/21	60	71	28	1	New Construction - Initial	1/1/80
JOSEWY	14940	JOSE WAY	END	DOMINGO RD	E	6	AC	2	1,390	32	44,480	12/30/20	60	75	22	3	Surface Treatment - Slurry Seal	5/25/20
MORLAP	16930	MORELIA PL	MORELIA AVE	LAGUNA RD	E	6	AC	2	960	30	28,800	12/4/20	60	19	65	16	New Construction - Initial	1/1/80
LIBRYLN	19490	LIBRARY LN	AMERIGE AVE	COMMONWEALTH AVE	E	2	AC	2	325	32	10,400	12/1/21	60	46	54	0	New Construction - Initial	1/1/80
CEDAR	11575	CEDAR AVE	SOUTHGATE AVE	ORANGETHORPE AVE	E	1	AC	2	730	32	23,360	4/18/23	61	73	20	7	Surface Treatment - Slurry Seal	7/1/12
DANAPL	12220	DANA PL	LINDENDALE AVE	E END	E	5	AC	2	430	32	13,760	1/6/21	61	59	41	0	New Construction - Initial	1/1/80
LSPLMS	15535	LAS PALMAS DR	HARBOR BL	ALTURA DR	E	6	AC	2	1,028	30	14,400	12/1/20	61	44	53	3	New Construction - Initial	1/1/80
ASHAVE	50060	ASH AVE	PRITCHARD AVE	JENSEN WAY	E	1	AC	2	840	32	26,880	4/20/23	61	75	25	0	Surface Treatment - Slurry Seal	7/1/12
MELODY	16562	MELODY LN	STANFORD AVE	RAYMOND AVE	E	5	AC	2	270	32	8,640	4/16/25	61	44	56	0	New Construction - Initial	1/1/80
CAMICE	11220	CAMINO CENTROLOMA	ROSECRANS AVE	MARIPOSA LN	E	8	AC	2	1,384	32	44,288	4/21/25	61	47	53	0	New Construction - Initial	1/1/80
ROSSLN	18940	ROSSLYNN AVE	JEFFERSON AVE	WASHINGTON AVE	E	2	AC	2	995	32	31,840	12/1/21	61	58	35	7	Surface Treatment - Slurry Seal	7/1/12
NUTWOA	17200	NUTWOOD AVE	RAYMOND AVE	RIEDEL AVE	E	3	AC	2	1,070	32	34,240	11/17/21	61	48	48	4	New Construction - Initial	1/1/80
RAYMOA	18410	RAYMOND AVE	RIVERSIDE DR	CHAPMAN AVE	E	3	AC	2	895	30	30,760	11/17/21	61	67	32	1	New Construction - Initial	1/1/80
CAMBRI	11150	CAMBRIDGE AVE	BASTANCHURY RD	SHERWOOD AVE	E	4	AC	2	1,142	36	41,112	4/22/25	61	45	49	6	New Construction - Initial	1/1/80
LNGVWD	16030	LONGVIEW DR	HARMONY LN	DOROTHY LN	E	5	AC	2	355	36	12,780	4/15/25	61	50	50	0	New Construction - Initial	1/1/80
VALVWD	20596	VALLEY VIEW DR	GLENHAVEN AVE	HIGHLAND AVE	E	7	AC	2	548	36	19,728	4/23/25	62	37	31	32	New Construction - Initial	1/1/80
PORTER	18060	PORTER AVE	ADAMS AVE	WASHINGTON AVE	E	2	AC	2	360	32	11,520	12/1/21	62	77	23	0	Surface Treatment - Slurry Seal	7/1/12
GARNET	13510	GARNET LN	PLACENTIA AVE	SAPPHIRE RD	E	4	AC	2	1,290	37	47,730	12/3/20	62	0	91	9	New Construction - Initial	1/1/80
ASHAVE	10190	ASH AVE	RAYMOND AVE	END	E	3	AC	2	642	32	20,544	2/17/22	62	24	69	7	New Construction - Initial	1/1/80
MAURNE	16440	MAURINE PL	LINDENDALE AVE	END	E	5	AC	2	220	32	7,040	12/22/20	62	29	71	0	New Construction - Initial	1/1/80
DOMNGR	12480	DOMINGO RD	PASEO DORADO	CAMINO DEL SOL	E	8	AC	2	1,900	32	60,800	4/18/25	62	55	42	3	New Construction - Initial	1/1/80
ACACIA	5015	ACACIA AVE	MIRAMAR DR	MELODY LN	E	5	AC	2	862	37	31,894	4/16/25	62	41	41	18	New Construction - Initial	1/1/80
SNTFEA	19230	SANTA FE AVE	HARBOR BLVD	LEMON ST	E	3	AC	2	1,280	32	40,960	12/3/21	62	81	19	0	New Construction - Initial	1/1/80
LINCOL	15780	LINCOLN AVE	END	MELODY LN	E	5	AC	2	553	28	15,484	4/16/25	62	33	67	0	New Construction - Initial	1/1/80
TOPAZ	20250	TOPAZ LN	PLACENTIA AVE	SAPPHIRE RD	E	4	AC	2	1,290	37	47,730	1/13/21	62	37	61	2	New Construction - Initial	1/1/80
RAYMOA	18400	RAYMOND AVE	MELODY LN	GLENWOOD AVE	E	3	AC	2	1,326	36	45,230	11/17/21	63	72	27	1	New Construction - Initial	1/1/80
ALTOLN	7040	ALTO LN	MOUNTAIN VIEW PL	HALE AVE	E	5	AC	2	375	32	12,000	12/10/20	63	44	44	12	New Construction - Initial	1/1/80
TERAZA	20150	TERRAZA PL	RANCHO CIR	DOMINGO RD	E	6	AC	2	2,035	32	65,120	12/3/20	63	62	25	13	New Construction - Initial	1/1/80
MARWOD	16430	MARWOOD AVE	END	WILSHIRE AVE	E	2	AC	2	510	32	16,320	12/20/21	63	63	36	1	New Construction - Initial	1/1/80
ALDER	6090	ALDER PL	END	ROSALIA DR	E	5	AC	2	150	32	4,800	6/5/26	63	26	45	0	Surface Treatment - REAS	8/28/25
COURTN	12010	COURTNEY AVE	VALENCIA DR	OAK AVE	E	1	AC	2	840	32	26,880	4/18/23	64	52	34	14	Surface Treatment - Slurry Seal	7/1/12
TUNALS	20360	TUNALES DR	LAS RIENDAS DR	LAS PALMAS DR	E	6	AC	2	845	32	27,040	4/18/25	64	41	29	30	Surface Treatment - Slurry Seal	5/25/20
PALMDR	17630	PALM DR	PLACENTIA AVE	COLLINS WAY	E	4	AC	2	1,405	32	44,960	1/13/21	64	33	65	2	New Construction - Initial	1/1/80
ROSSLN	18950	ROSSLYNN AVE	WOODS AVE	RICHMAN AVE	E	2	AC	2	1,165	32	37,280	11/29/21	64	77	22	1	New Construction - Initial	1/1/80
MNTVWP	16945	MOUNTAIN VIEW PL	HALE AVE	FULLERTON CREEK DR	E	5	AC	2	2,330	32	74,560	12/10/20	64	37	60	3	New Construction - Initial	1/1/80
LINCOL	15805	LINCOLN AVE	BROOKDALE PL	YALE AVE	E	3	AC	2	820	32	26,240	11/17/21	64	64	16	20	Surface Treatment - REAS	7/1/23
LSRDDR	15590	LAS RIENDAS DR	TWILIGHT DR	E END	E	6	AC	2	1,000	32	32,000	12/23/20	64	53	47	0	Surface Treatment - Slurry Seal	5/25/20
PRTCRD	18195	PRITCHARD AVE	VALENCIA DR	OAK AVE	E	1	AC	2	848	32	27,136	4/20/23	64	35	55	10	Surface Treatment - Slurry Seal	7/1/12
ORCHRD	17500	ORCHARD AVE	COMMONWEALTH AVE	SOUTH END	E	7	AC	2	260	32	8,320	4/1/25	65	0	25	75	New Construction - Initial	1/1/80
VALVWD	20603	VALLEY VIEW DR	AVOLENCIA DR	SUNNY CREST DR	E	7	AC	3	390	60	18,370	4/8/25	65	13	87	0	New Construction - Initial	1/1/80
GILBES	13560	GILBERT ST	ORANGETHORPE AVE	HOUSTON AVE	E	1	AC	2	1,779	32	56,928	4/12/23	65	52	12	36	New Construction - Initial	1/1/80
MARION	16375	MARION BLVD	MELVILLE DR	BREA	E	5	AC	2	1,947	36	70,092	12/3/20	65	55	32	13	New Construction - Initial	1/1/80
SIRVST	19500	SIERRA VISTA DR	END	FERN DR	E	2	AC	2	275	32	8,800	5/8/25	66	66	6	28	Surface Treatment - Slurry Seal	6/1/24
ASHAVE	10095	ASH AVE	COURTNEY AVE	OAK AVE	E	1	AC	2	1,048	26	27,248	4/18/23	66	72	16	12	Surface Treatment - Slurry Seal	7/1/12
LNDNDL	15850	LINDENDALE AVE	END	ALTO LN	E	5	AC	2	1,351	32	35,040	12/3/20	66	60	32	8	New Construction - Initial	1/1/80
RAYMOA	18405	RAYMOND AVE	GLENWOOD AVE	RIVERSIDE DR	E	3	AC	2	999	32	31,968	11/17/21	66	66	32	2	New Construction - Initial	1/1/80
COLLEG	11870	COLLEGE PL	TITAN DR	COMMONWEALTH AVE	E	4	AC	2	520	32	16,640	4/16/25	66	43	57	0	New Construction - Initial	1/1/80
ROLLHL	18745	ROLLING HILLS DR	MAPLE AVE	MERLIN AVE	E	5	AC	3	2,180	60	130,800	12/22/20	66	9	91	0	New Construction - Initial	1/1/80
KMBRLY	15020	KIMBERLY AVE	RAYMOND AVE	ACACIA AVE	E	3	AC	3	2,570	38	97,660	12/23/21	67	21	69	10	New Construction - Initial	1/1/80
PALMDR	17640	PALM DR	COLLINS WAY	BRADFORD AVE	E	4	AC	2	1,075	32	34,400	1/13/21	67	9	68	23	New Construction - Initial	1/1/80
WHTNGA	21245	WHITING AVE	HIGHLAND AVE	HARBOR BL	E	2	AC	2	1,275	32	40,800	6/5/26	67	60	22	18	Surface Treatment - REAS	7/30/25
ROBRTA	18640	ROBERTA AVE	BROOKHURST RD	PACIFIC DR	E	1	AC	2	705	32	22,900	4/17/23	67	77	23	0	Surface Treatment - Slurry Seal	7/1/12
LNGVWD	16020	LONGVIEW DR	SKYLINE DR	HARMONY LN	E	5	AC	2	2,030	36	73,080	4/15/25	67	54	46	0	New Construction - Initial	1/1/80
ORANFRON	9940	ORANGETHROPE (FRONTAGE)	ORANGETHROPE AVE	WASHINTON AVE	E	2	AC	2	446	26	12,333	12/1/23	67	54	39	7	New Construction - AC	1/1/80
MAPLE	16275	MAPLE AVE	ROLLING HILLS DR	END	E	5	AC	2	980	32	31,360	12/22/20	67	25	74	1	New Construction - Initial	1/1/80
SUNYWD	19950	SUNNY WOOD DR	END	EL ADOBE PL	E	6	AC	2	850	32	27,200	5/9/25	67	85	11	4	Surface Treatment - Slurry Seal	6/1/24
VIRGNA	20820	VIRGINIA RD	END	STANFORD AVE	E	5	AC	2	255	32	8,160	12/15/20	67	57	43	0	New Construction - Initial	1/1/80
CAMIES	11270	CAMINO ESCONDIDO	CALLE CANDELA	END	E	8	AC	2	567	32	18,144	4/22/25	68	7	71	22	New Construction - Initial	1/1/80
SKYLND	19580	SKYLINE DR	MIRAMAR DR	SORRENTO PL	E	5	AC	2	890	26	23,140	12/3/20	68	74	26	0	New Construction - Initial	1/1/80
CAMIVI	11290	CAMINO LA VISTA	END	DOMINGO RD	E	8	AC	2	245	32	7,840	4/22/25	68	0	98	2	New Construction - Initial	1/1/80
ROLLHL	18750	ROLLING HILLS DR	MERLIN AVE	ST COLLEGE BL	E	5	AC	3	925	60	55,500	12/22/20	68	19	74	7	New Construction - Initial	1/1/80
BISCAY	10810	BISCAYNE PL	CARLETON WAY	END	E	8	AC	2	371	32	11,872	4/17/25	68	6	94	0	New Construction - Initial	1/1/80
BAXTER	10640	BAXTER ST	VIA BURTON ST	91 FWY	E	4	AC	2	681	32	21,792	1/6/21	68	28	62	10	New Construction - Initial	1/1/80
SKYLND	19540	SKYLINE DR	VIRGINIA RD	LUANNE AVE	E	5	AC	2	885	26	23,010	4/15/25	68	33	57	10	New Construction - Initial	1/1/80
ASHAVE	10080	ASH AVE	MAGNOLIA AVE	PRITCHARD AVE	E	1	AC	2	975	32	31,200	4/20/23	68	32	68	0	Surface Treatment - Slurry Seal	7/1/12

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
FENDAV	13085	FENDER AVE	ST COLLEGE BL	PLACENTIA AVE	E	4	AC	2	2,600	38	98,800	3/18/25	69	47	39	14	Complete Reconstruction - AC	6/1/18
MALDEN	16195	MALDEN AVE	CHAPMAN AVE	COMMONWEALTH AVE	E	2	AC	2	1,260	32	40,320	12/2/21	69	0	100	0	New Construction - Initial	1/1/80
BALCOM	10480	BALCOM AVE	CHAPMAN AVE	WILSHIRE AVE	E	3	AC	2	522	32	16,704	11/19/21	69	34	66	0	New Construction - Initial	1/1/80
MARIE	16340	MARIE AVE	JACARANDA PL	WILSHIRE AVE	E	7	AC	2	795	26	20,670	12/22/21	69	76	21	3	New Construction - Initial	1/1/80
LRKELN	15425	LARK ELLEN DR	PONDEROSA AVE	EVERGREEN AVE	E	5	AC	2	1,006	32	32,192	4/22/25	69	0	61	39	New Construction - Initial	1/1/80
ASHAVE	10140	ASH AVE	WOODS AVE	RICHMAN AVE	E	2	AC	2	1,196	32	38,272	11/29/21	69	82	18	0	New Construction - Initial	1/1/80
HRMNYL	14050	HARMONY LN	LINCOLN AVE	STANFORD AVE	E	5	AC	2	830	32	26,560	4/16/25	69	36	63	1	New Construction - Initial	1/1/80
HILLAV	14474	HILL AVE	CITRUS AVE	EUCLID ST	E		AAC	0	1,050	32	36,200	8/29/23	69	50	50	0	New Construction - Initial	1/1/10
CAMIAL	11200	CAMINO ALTO	END	DOMINGO RD	E	8	AC	2	438	32	14,016	4/22/25	70	0	100	0	New Construction - Initial	1/1/80
SKYLND	19585	SKYLINE DR	SORRENTO PL	ACACIA AVE	E	5	AC	2	1,205	32	38,560	4/16/25	70	38	47	15	New Construction - Initial	1/1/80
RICHMN	18500	RICHMAN AVE	VALLEY VIEW DR	UNION AVE	E	2	AC	2	1,335	32	42,720	12/2/21	70	36	64	0	New Construction - Initial	1/1/80
PINEDR	17880	PINE DR	WALNUT AVE	VALENCIA DR	E	7	AC	2	480	32	15,360	4/12/23	70	17	83	0	New Construction - Initial	1/1/80
LIDOPL	15740	LIDO PL	END	DOMINGO RD	E	6	AC	2	450	32	14,400	4/18/25	70	25	49	26	Surface Treatment - Slurry Seal	5/25/20
SKYLND	19545	SKYLINE DR	LUANNE AVE	LONGVIEW DR	E	5	AC	2	990	32	31,680	4/15/25	70	59	41	0	New Construction - Initial	1/1/80
GLNHVN	13580	GLENHAVEN AVE	VALLEY VIEW DR	S END	E	2	AC	2	625	32	20,000	12/20/21	70	67	19	14	New Construction - Initial	1/1/80
CASBLA	11510	CASA BLANCA DR	FERN DR	END	E	2	AC	2	745	28	20,860	5/8/25	70	81	8	11	Surface Treatment - Slurry Seal	6/1/24
CIELO	11730	CIELO PL	END	CIENAGA DR	E	6	AC	2	325	32	10,400	4/18/25	70	49	51	0	Surface Treatment - Slurry Seal	5/25/20
SPPHRE	19370	SAPPHIRE RD	YORBA LINDA BLVD	QUARTZ LN	E	4	AC	2	1,740	37	64,380	4/21/25	71	72	27	1	New Construction - Initial	1/1/80
ADAMS	5090	ADAMS AVENUE	KNEPP AVE	PORTER AVE	E	2	AC	2	850	32	27,200	12/1/21	71	64	36	0	Surface Treatment - Slurry Seal	7/1/12
WALNTA	20930	WALNUT AVE	RICHMAND AVE	HIGHLAND AVE	E	2	AC	2	1,300	32	41,600	12/1/21	71	74	26	0	New Construction - Initial	1/1/80
ALVRDO	7060	ALVARADO CIR	CORONADO DR	END	E	6	AC	2	380	26	9,880	4/18/25	71	17	83	0	Surface Treatment - Slurry Seal	5/25/20
CAPIST	11430	CAPISTRANO CIR	CORONADO DR	END	E	6	AAC	2	336	32	10,752	4/18/25	71	11	89	0	Surface Treatment - Slurry Seal	5/25/20
ALMIRA	7000	ALMIRA AVE	CYPRESS AVE	YORBA LINDA BLVD	E	4	AC	2	1,430	32	45,760	4/21/25	71	70	26	4	Surface Treatment - Slurry Seal	5/25/20
HILLAV	14500	HILL AVE	RICHMAN AVE	HIGHLAND AVE	E	2	AC	2	1,280	32	40,960	11/29/21	71	79	21	0	New Construction - Initial	1/1/80
FRANCS	13360	FRANCES AVE	SKYLINE DR	CANNON LN	E	5	AC	2	1,150	27	31,050	4/15/25	71	7	45	48	New Construction - Initial	1/1/80
PINEDR	17885	PINE DR	VALENCIA DR	ASH AVE	E	1	AC	2	555	32	17,760	4/18/23	72	68	32	0	Surface Treatment - Slurry Seal	7/1/12
RICMNK	18560	RICHMAN KNOLL	VALENCIA MESA DR	RICHMAN AVE	E	7	AC	2	1,640	32	52,480	4/9/25	72	0	54	46	New Construction - Initial	1/1/80
SNTYBL	19340	SANTA YSABEL AVE	SAN CARLOS AVE	DEREK DR	E	4	AC	2	1,315	32	42,080	12/10/20	72	67	33	0	Surface Treatment - Slurry Seal	5/25/20
HOLYDL	14580	HOLLYDALE DR	END	MIRARMAR DR	E	5	AC	2	1,020	32	32,640	4/16/25	72	8	33	59	New Construction - Initial	1/1/80
WESTAV	21180	WEST AVE	ADAMS AVE	WASHINGTON AVE	E	2	AC	2	391	32	12,512	2/17/22	72	63	37	0	Surface Treatment - Slurry Seal	7/1/12
MEADOW	16530	MEADOW LN	END	SYCAMORE AVE	E	5	AC	2	405	32	12,960	5/8/25	72	72	28	0	New Construction - Initial	1/1/80
MOORE	16913	MOORE AVE	BURNING TREE RD	GILBERT ST	E	8	AC	3	1,575	38	59,850	4/25/23	72	3	60	37	New Construction - Initial	1/1/80
WALNTA	20960	WALNUT AVE	LEMON ST BRIDGE	END	E	3	AC	2	530	45	23,850	11/22/21	72	79	21	0	New Construction - Initial	1/1/80
HORNET	14630	HORNET WAY	DOROTHY LN	BERKELEY AVE	E	3	AC	2	520	32	16,640	11/15/21	72	0	100	0	New Construction - Initial	1/1/80
TOUSAU	20270	TOUSSAU DR	LONGVIEW DR	VALLE VISTA DR	E	5	AC	2	980	32	31,360	4/15/25	72	44	55	1	New Construction - Initial	1/1/80
LAMESD	15170	LA MESA DR	VALENCIA MESA DR	LA MESA PL	E	7	AC	2	1,070	22	23,540	12/22/21	72	25	74	1	New Construction - Initial	1/1/80
HLCRTL	14530	HILLCREST LN	END	HILLCREST DR	E	3	AC	2	310	20	6,200	2/17/22	73	0	24	76	Surface Treatment - REAS	7/1/23
CANNON	11380	CANNON LN	LEMON ST	LUANNE AVE	E	5	AC	2	653	26	16,978	4/15/25	73	25	51	24	New Construction - Initial	1/1/80
EVRGRN	13030	EVERGREEN AVE	LAUREL AVE	LARK ELLEN DR	E	5	AC	2	1,110	32	35,520	12/4/20	73	42	43	15	New Construction - Initial	1/1/80
BARCEL	10550	BARCELONA CIR	CORONADO DR	END	E	6	AC	2	334	26	8,684	4/18/25	73	15	85	0	Surface Treatment - Slurry Seal	5/25/20
VALVIS	20550	VALLE VISTA DR	SKYLINE DR	LONGVIEW DR	E	5	AC	2	1,650	32	52,800	4/15/25	73	29	71	0	New Construction - Initial	1/1/80
GROVE	13830	GROVE PL	HART PL	END	E	3	AC	2	225	32	7,200	12/6/21	73	36	64	0	New Construction - Initial	1/1/80
HEATHE	14210	HEATHER DR	LARK ELLEN DR	END	E	5	AC	2	884	36	34,324	6/5/26	73	99	1	0	Surface Treatment - REAS	8/28/25
MELODY	16560	MELODY LN	LINCOLN AVE	STANFORD AVE	E	5	AC	2	790	32	25,280	4/16/25	73	32	44	24	New Construction - Initial	1/1/80
HOUSTN	50030	HOUSTON AVE	KNUCKLE (100' E/ COURTNEY AVE)	END	E	1	AC	2	1,268	30	36,985	4/12/23	73	37	49	14	Surface Treatment - Slurry Seal	7/1/12
SOGATE	19656	SOUTHGATE AVE	ADAMS AVE	END	E	2	AC	2	125	32	4,000	12/1/21	73	64	36	0	Surface Treatment - Slurry Seal	7/1/12
KNEPP	15100	KNEPP AVE	RICHMAN AVE	HIGHLAND AVE	E	2	AC	2	1,280	32	40,960	11/29/21	73	69	31	0	New Construction - Initial	1/1/80
CALAVE	11055	CALAVERA PL	CAMINO CENTROLOMA	END	E	8	AC	2	309	32	9,888	4/21/25	73	7	93	0	New Construction - Initial	2/13/11
TITAN	20240	TITAN DR	NUTWOOD AVE	END	E	4	AC	2	380	37	14,060	4/21/25	73	13	86	1	New Construction - Initial	1/1/80
DORTHL	12510	DOROTHY LN	RAYMOND AVE	FERNDALE AVE	E	5	AC	2	1,705	36	61,380	4/15/25	73	24	66	10	New Construction - Initial	1/1/80
HRMNYL	14040	HARMONY LN	END	LINCOLN AVE	E	5	AC	2	1,235	32	39,520	1/13/21	74	58	42	0	New Construction - Initial	1/1/80
LRKELN	15430	LARK ELLEN DR	EVERGREEN AVE	STATE COLLEGE BLVD	E	5	AC	2	1,430	32	45,760	12/4/20	74	26	62	12	New Construction - Initial	1/1/80
MNTVWP	16950	MOUNTAIN VIEW PL	VICTORIA DR	CHAPMAN AVE	E	4	AC	2	2,130	32	68,160	4/15/25	74	46	48	6	New Construction - Initial	1/1/80
MIRDOR	16770	MIRADOR CIR	END	LA ENTRADA PL	E	6	AC	2	250	32	8,000	4/18/25	74	16	84	0	Surface Treatment - Slurry Seal	5/25/20
LUANNE	16100	LUANNE AVE	SKYLINE DR	CANNON LN	E	5	AC	2	1,185	28	33,180	4/15/25	74	29	41	30	New Construction - Initial	1/1/80
WARBTN	21060	WARBURTON WAY	U.P.R.R.	BASTANCHURY RD	E	8	AC	5	280	53	14,840	4/2/25	74	0	68	32	New Construction - Initial	1/1/80
LADRVS	15240	LADERA VISTA DR	ACACIA AVE	LADERA VISTA PL	E	5	AC	2	2,640	32	84,480	1/13/21	74	74	25	1	New Construction - Initial	1/1/80
FERNDR	13170	FERN DR	VICTORIA DR	HALE AVE	E	4	AC	2	250	32	8,000	4/15/25	74	53	47	0	Surface Treatment - Slurry Seal	5/25/20
WOODCR	21525	WOODCREST AVE	CITRUS	ORANGE AVE	E	1	AC	2	370	32	11,840	4/17/23	74	36	49	15	Surface Treatment - Slurry Seal	7/1/12
DRAKE	12550	DRAKE AVE	CHAPMAN AVE	COMMONWEALTH AVE	E	2	AC	2	1,228	32	39,296	12/2/21	74	72	28	0	New Construction - Initial	1/1/80
TETON	20160	TETON DR	SUNNY HILLS RD	LAS PALMAS DR	E	6	AC	2	265	32	8,480	4/18/25	74	0	47	53	Surface Treatment - Slurry Seal	5/25/20
PICOST	17860	PICO ST	END	CARHART AVE	E	7	AC	2	550	26	14,300	4/25/23	74	42	57	1	New Construction - Initial	1/1/80
COLLEG	11875	COLLEGE PL	COMMONWEALTH AVE	LANGSDORF DR	E	4	AC	2	525	32	16,800	4/16/25	74	33	59	8	New Construction - Initial	1/1/80
WESTAV	21170	WEST AVE	END	EUCLID	E	1	AC	2	620	32	19,840	3/19/25	75	65	26	9	Surface Treatment - Slurry Seal	7/1/12
LADRVS	15280	LADERA VISTA DR	WILSHIRE AVE	COMMONWEALTH AVE	E	4	AC	2	620	32	19,840	5/14/25	75	85	15	0	Surface Treatment - Slurry Seal	6/1/24
PRNCTN	18112	PRINCETON AVE	GLENWOOD AVE	PRINCETON CIR	E	3	AC	2	230	32	7,360	11/17/21	75	33	67	0	New Construction - Initial	1/1/80
CRESVW	12100	CRESTVIEW DR	END	VALENCIA MESA DR	E	7	AC	2	863	29	25,027	5/8/25	75	62	25	13	Surface Treatment - REAS	8/3/24
VIRGNA	20830	VIRGINIA RD	RIEDEL AVE	END	E	5	AC	2	865	32	27,680	4/16/25	75	26	67	7	New Construction - Initial	1/1/80
PUENTE	18230	PUENTE ST	IMPERIAL HWY	EADINGTON DR	E	6	AC	2	1,330	36	47,880	4/18/25	75	31	66	3	Surface Treatment - Slurry Seal	5/25/20
COYOTE	12080	COYOTE HILLS DR	OPEN SKY DR	VINTAGE WAY	E	8	AC	2	1,825	36	65,700	5/14/25	76	70	30	0	Surface Treatment - Slurry Seal	6/1/24
CORONA	11960	CORONADO DR	END	CAPISTRANO CIR	E	6	AC	2	1,860	32	59,520	4/18/25	76	12	85	3	Surface Treatment - Slurry Seal	5/25/20
ROBIN	18680	ROBIN WAY	END	MARELEN DR	E	7	AC	2	245	28	6,860	4/8/25	76	0	100	0	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
HEMLCK	14220	HEMLOCK PL	EL MIRADOR DR	ROLLING HILLS DR	E	5	AC	2	650	32	20,800	11/25/20	76	0	98	2	Cold Mill and Overlay	8/1/18
MADISA	16130	MADISON AVE	END	PLACENTIA AVE	E	4	AC	2	715	37	28,955	2/27/25	76	0	36	64	New Construction - Initial	1/1/80
OLDCRK	17350	OLD CREEK LN	VICTORIA DR	SYCAMORE AVE	E	5	AC	2	380	32	12,160	5/8/25	76	0	28	72	New Construction - Initial	1/1/80
JEFRSN	14860	JEFFERSON AVE	END	COMMONWEALTH AVE	E	2	AC	2	170	32	5,440	12/22/21	76	38	62	0	New Construction - Initial	1/1/80
DEERPK	12270	DEERPARK DR	TREEVIEW PL	EUCALYPTUS PL	E	4	AC	2	715	32	22,955	11/25/20	76	43	52	5	Surface Treatment - Slurry Seal	5/25/20
DEERPK	12275	DEERPARK DR	EUCALYPTUS PL	DEVONSHIRE AVE	E	4	AC	2	1,320	32	43,262	11/25/20	76	43	52	5	Surface Treatment - Slurry Seal	5/25/20
CAMIRO	11320	CAMINO LOS ROBLES	END	DOMINGO RD	E	8	AC	2	229	32	7,328	4/22/25	76	0	95	5	New Construction - Initial	1/1/80
WESTAV	21130	WEST AVE	PINE DR	END	E	1	AC	2	580	32	18,560	4/18/23	76	65	25	10	Surface Treatment - Slurry Seal	7/1/12
HERMSD	14235	HERMOSA DR	LAS PALMAS DR	LAKEVIEW DR	E	6	AC	2	1,110	24	26,640	12/3/20	76	29	65	6	New Construction - Initial	1/1/80
CAMILO	11310	CAMINO LOMA	END	DOMINGO RD	E	8	AC	2	374	32	11,968	4/22/25	77	0	98	2	New Construction - Initial	1/1/80
SOGATE	19670	SOUTHGATE AVE	RICHMAN AVE	HIGHLAND AVE	E	2	AC	2	1,280	32	40,960	11/29/21	77	73	27	0	New Construction - Initial	1/1/80
DORTHL	12500	DOROTHY LN	LONGVIEW DR	RAYMOND AVE	E	5	AC	2	1,690	32	54,080	4/15/25	77	44	55	1	New Construction - Initial	1/1/80
VIRGNA	20810	VIRGINIA RD	LONGVIEW DR	VALLE VISTA DR	E	5	AC	2	915	32	29,280	4/15/25	77	26	73	1	New Construction - Initial	1/1/80
POMONA	17990	POMONA AVE	TRUSLOW AVE	END	E	3	AC	2	1,497	32	47,904	11/22/21	77	41	59	0	New Construction - Initial	1/1/80
LRKELN	15445	LARK ELLEN DR	HEATHER DR	ROSALIA DR	E	5	AC	2	970	36	34,920	6/5/26	77	88	12	0	Surface Treatment - REAS	8/28/25
HICKRY	14320	HICKORY PL	ROSALIA DR	END	E	5	AC	2	305	32	9,760	6/5/26	77	81	11	8	Surface Treatment - REAS	8/28/25
VALVWD	20606	VALLEY VIEW DR	SUNNY CREST DR	HARBOR BL	E	7	AC	4	822	50	41,100	4/8/25	77	0	100	0	New Construction - Initial	1/1/80
HOUSTN	14725	HOUSTON AVE	W END	HARBOR BL	E	2	AC	2	515	32	16,480	12/16/21	77	29	64	7	New Construction - Initial	1/1/80
VALEND	20470	VALENCIA DR	HIGHLAND AVE	HARBOR BLVD	E	2	AC	2	1,260	32	40,320	11/29/21	77	29	71	0	New Construction - Initial	1/1/80
CAMEO	11170	CAMEO LN	GARNET LN	PEARL DR	E	4	AC	2	280	37	10,360	12/3/20	78	0	100	0	Surface Treatment - Slurry Seal	5/25/20
CABRIL	11040	CABRILLO CIR	CORONADO DR	END	E	6	AAC	2	325	28	9,100	4/18/25	78	16	84	0	Surface Treatment - Slurry Seal	5/25/20
CAMEO	11160	CAMEO LN	TOPAZ LN	GARNET LN	E	4	AC	2	273	37	10,101	12/22/20	78	0	100	0	Surface Treatment - Slurry Seal	5/25/20
BALFOU	10535	BALFOUR AVE	COMMONWEALTH AVE	DEREK DR	E	4	AC	2	880	32	28,160	2/27/25	78	5	71	24	Surface Treatment - Slurry Seal	5/25/20
WLMSON	21335	WILLIAMSON AVE	CHESTNUT PL	RICHMAN AVE	E	2	AC	2	542	35	18,970	12/1/21	78	51	49	0	New Construction - Initial	1/1/80
TREEVW	20280	TREEVIEW PL	DEERPARK DR	END	E	4	AC	2	1,055	32	33,760	2/27/25	78	64	28	8	Surface Treatment - Slurry Seal	5/25/20
TWILGT	20380	TWILIGHT DR	LAS RIENDAS DR	SUNNY HILLS RD	E	6	AC	2	580	32	18,560	12/23/20	78	40	55	5	New Construction - Initial	1/1/80
WILSHR	21405	WILSHIRE AVE	LAWRENCE AVE	BALCOM AVE	E	3	AC	2	663	36	23,868	11/19/21	78	71	29	0	Surface Treatment - Slurry Seal	8/1/18
WOODSA	21586	WOODS AVE	ROSSLYNN AVE	ORANGETHROPE	E	2	AC	2	1,292	32	41,344	11/29/21	78	66	34	0	New Construction - Initial	1/1/80
ELMAVE	12900	ELM AVE	END	POMONA AVE	E	3	AC	2	470	32	15,040	11/22/21	78	63	37	0	New Construction - Initial	1/1/80
DORTHL	12520	DOROTHY LN	ACACIA AVE	VICTORIA DR	E	5	AC	2	880	36	31,680	4/15/25	78	44	56	0	New Construction - Initial	1/1/80
VANGFT	20630	VANDERGRIFT DR	DEERPARK DR	END	E	4	AC	2	130	32	4,160	2/27/25	78	26	40	34	Surface Treatment - Slurry Seal	5/25/20
WALNTW	21020	WALNUT WAY	WALNUT AVE	LEMON ST	E	3	AC	2	434	32	13,888	12/1/21	78	31	41	28	New Construction - Initial	1/1/80
WESTAV	50040	WEST AVE	PRITCHARD AVE	JENSEN WAY	E	1	AC	2	855	32	27,360	4/20/23	79	34	66	0	Surface Treatment - Slurry Seal	7/1/12
KMBRLY	15040	KIMBERLY AVE	STATE COLLEGE BLVD	PLACENTIA AVE	E	4	AC	2	2,150	32	68,800	12/23/21	79	0	95	5	New Construction - Initial	1/1/80
HOLYOK	14610	HOLLYOAK DR	BASTANCHURY RD	END	E	5	AC	2	1,105	32	35,360	4/22/25	79	35	46	19	New Construction - Initial	1/1/80
FERNDR	13120	FERN DR	EUCLID ST	WOODS AVE	E	2	AC	2	1,470	32	47,040	5/8/25	79	83	17	0	Surface Treatment - Slurry Seal	6/1/24
SPRUCE	19730	SPRUCE PL	END	BEECHWOOD AVE	E	5	AC	2	390	32	12,480	11/25/20	79	0	35	65	New Construction - Initial	1/1/80
CRESVW	12111	CRESTVIEW DR	1085' S/ VALENCIA MESA DR	LA MESA DR	E	7	AC	2	406	24	10,544	4/2/25	79	0	100	0	New Construction - Initial	1/1/80
GARNET	13500	GARNET LN	DEER PARK DR	PLACENTIA AVE	E	4	AC	2	1,110	37	41,070	2/27/25	79	23	65	12	Surface Treatment - Slurry Seal	5/25/20
ROLLHL	18760	ROLLING HILLS DR	ASSOCIATED RD	HARTFORD AVE	E	4	AC	2	1,445	58	83,810	4/22/25	79	24	61	15	New Construction - Initial	1/1/80
CHAPFRONT	70010	CHAPMAN AVE (FRONTAGE)	COMMONWEALTH AVE	DEER DR	E	4	AC	2	955	30	28,650	12/7/23	79	41	52	7	New Construction - AC	1/1/80
DORTHL	12530	DOROTHY LN	VICTORIA DR	STATE COLLEGE BLVD	E	5	AC	3	1,745	37	64,565	4/15/25	79	28	55	17	New Construction - Initial	1/1/80
LAENTD	15150	LA ENTRADA PL	CORONADO DR	HARBOR BL	E	6	AC	2	495	48	23,760	4/18/25	79	26	74	0	Surface Treatment - Slurry Seal	5/25/20
HIGLND	14400	HIGHLAND AVE	TRUSLOW AVE	VALENCIA DR	E	2	AC	3	410	40	16,400	12/15/21	79	38	62	0	New Construction - Initial	1/1/80
ROLLHL	18740	ROLLING HILLS DR	SEQUOIA AVE	MAPLE AVE	E	5	AC	3	848	60	50,880	12/10/20	80	20	80	0	Cold Mill and Overlay	8/1/18
LNGDRF	15380	LANGSDORF DR	NUTWOOD AVE	COLLEGE PL	E	4	AC	2	910	32	29,120	4/16/25	80	22	78	0	New Construction - Initial	1/1/80
SUNCRT	19870	SUNNYCREST DR	SUNNY KNOLL	RICHMAN AVE	E		AC	0	1,115	32	35,680	4/8/25	80	0	100	0	New Construction - Initial	1/1/10
EADING	12590	EADINGTON AVE	ORANGETHORPE AVE	BAKER AVE	E	1	AC	2	885	32	28,320	4/17/23	80	69	31	0	Surface Treatment - Slurry Seal	7/1/12
CONCOR	11880	CONCORD AVE	OLD RIVER RD	END	E	5	AC	2	910	32	60,640	5/8/25	80	59	41	0	New Construction - Initial	1/1/80
EUCALY	13000	EUCALYPTUS PL	DEERPARK DR	END	E	4	AC	2	680	24	16,320	2/27/25	80	28	43	29	Surface Treatment - Slurry Seal	5/25/20
MRMARD	16780	MIRAMAR DR	LONGVIEW DR	VALLE VISTA DR	E	5	AC	2	660	32	21,120	4/15/25	80	10	90	0	New Construction - Initial	1/1/80
SNTCLP	19210	SANTA CLARA PL	END	SANTA CLARA AVE	E	4	AC	2	290	32	9,280	4/14/25	80	13	84	3	Surface Treatment - Slurry Seal	5/25/20
COYOTE	12070	COYOTE HILLS DR	GILBERT ST	OPEN SKY DR	E	8	AC	2	1,250	36	45,000	5/14/25	80	73	27	0	Surface Treatment - Slurry Seal	6/1/24
ASHBUR	10200	ASHBURN TERR	BREA BLVD	OAKMONT PL	E	5	AC	2	188	52	9,776	4/16/25	80	69	31	0	New Construction - Initial	1/1/80
CAMEO	11180	CAMEO LN	PEARL DR	QUARTZ LN	E	4	AC	2	302	37	11,174	12/3/20	80	14	86	0	Surface Treatment - Slurry Seal	5/25/20
BIRCH	10800	BIRCH PL	EL MIRADOR DR	END	E	5	AC	2	256	32	10,692	11/25/20	80	0	100	0	Surface Treatment - Slurry Seal	8/1/18
MOODY	16880	MOODY AVE	END	ALMIRA AVE	E	4	AC	2	600	25	15,000	11/24/20	80	29	50	21	Surface Treatment - Slurry Seal	5/25/20
LIMEAV	15770	LIME AVE	END	SANDALWOOD AVE	E	5	AC	2	615	32	19,680	11/25/20	80	0	100	0	New Construction - Initial	1/1/80
VALMES	20268	VALENCIA MESA DR	HARBOR BL	E END	E	7	AC	4	553	42	23,226	4/18/25	81	45	55	0	New Construction - Initial	1/1/80
ARROUE	10020	ARROUES DR	LANTANA AVE	E END	E	6	AC	2	153	32	4,896	4/22/25	81	55	40	5	Surface Treatment - Slurry Seal	5/25/20
VISTA	20860	VISTA LN	VALLEY VIEW DR	FERN DR	E	2	AC	2	645	32	20,640	12/20/21	81	0	79	21	New Construction - Initial	1/1/80
MONTGE	16865	MONTAGUE AVE	COMMONWEALTH AVE	END	E	3	AC	2	680	27	18,360	5/14/25	81	62	38	0	Surface Treatment - Slurry Seal	6/1/24
CAMBRI	11140	CAMBRIDGE AVE	WINCHESTER ST	BASTANCHURY RD	E	4	AC	2	1,117	32	35,744	4/22/25	81	64	36	0	Surface Treatment - Slurry Seal	5/25/20
ROLLHL	18770	ROLLING HILLS DR	HARTFORD AVE	PLACENTIA AVE	E	4	AC	2	1,775	58	102,950	4/22/25	81	32	68	0	New Construction - Initial	1/1/80
VERMNT	20650	VERMONT AVE	END	GREGORY AVE	E	7	AC	2	130	32	4,160	4/25/23	81	0	100	0	New Construction - Initial	1/1/80
HARGTN	14090	HARRINGTON DR	CENTRAL AVE	CHAPMAN AVE	E	3	AC	2	275	32	8,800	5/8/25	81	0	0	100	Surface Treatment - REAS	11/1/24
HLLTOP	14550	HILLTOP CT	S END	MOUNTAIN RIDGE DR	E	4	AC	2	540	26	14,040	4/21/25	81	0	41	59	New Construction - Initial	1/1/80
OLIVE	17400	OLIVE AVE	PINE DR	COURTNEY AVE	E	1	AC	2	996	32	31,872	4/12/23	81	33	67	0	Surface Treatment - Slurry Seal	7/1/12
SEQUOA	19390	SEQUOIA AVE	PONDEROSA AVE	ROLLING HILLS DR	E	5	AC	2	1,174	32	37,568	4/22/25	81	0	100	0	Complete Reconstruction - AC	8/1/18
CHAPMA	11651	CHAPMAN AVE	BASQUE AVE	MICHAEL AVE	E	7	AAC	2	876	32	28,032	4/1/25	81	76	24	0	Overlay - AC Structural	5/25/20
GLNWOD	13670	GLENWOOD AVE	MOUNTAIN VIEW PL	HALE AVE	E	4	AC	2	340	32	10,880	4/15/25	81	14	84	2	Surface Treatment - Slurry Seal	5/25/20
SPARRW	19690	SPARROW DR	END	PINTAIL DR	E	4	AC	2	710	32	22,720	2/27/25	81	0	100	0	Surface Treatment - Slurry Seal	5/25/20

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
BASQUE	10590	BASQUE AVE	MALVERN AVE	CHAPMAN AVE	E	7	AC	2	660	32	21,120	4/23/25	82	0	77	23	Mill, Overlay w/Fabric (1.5 In)	7/1/13
CATLIN	11540	CATALINA RD	SANTA BARBARA AVE	DOMINGO RD	E	6	AC	2	1,983	32	37,120	4/18/25	82	0	100	0	Surface Treatment - Slurry Seal	5/25/20
SOGATE	19635	SOUTHGATE AVE	BROOKHURST AVE	PACIFIC DR	E	1	AC	2	1,145	32	36,640	3/25/25	82	0	100	0	Surface Treatment - Slurry Seal	7/1/12
RICHMN	18526	RICHMAN AVE	ASH AVE	ELM AVE	E	2	AC	2	265	32	8,480	11/29/21	82	55	45	0	New Construction - Initial	7/1/12
HOUSTN	14720	HOUSTON AVE	LOMBARD DR	E END	E	2	AC	2	1,265	32	40,480	11/24/21	82	36	64	0	New Construction - Initial	1/1/80
LAUREL	15635	LAUREL AVE	NORTHERN CITY LIMIT	LARK ELLEN DR	E	5	AC	2	245	32	7,840	5/14/25	82	16	84	0	Complete Reconstruction - AC	6/1/18
ELMIRA	12735	EL MIRADOR DR	SPRUCE PL	END	E	5	AC	2	370	32	11,840	4/22/25	82	0	100	0	Surface Treatment - Slurry Seal	8/1/18
BEVERL	10790	BEVERLY DR	BUENA VISTA DR	MALVERN AVE	E	7	AC	2	568	32	18,176	4/2/25	82	0	100	0	Complete Reconstruction - AC	11/1/16
MALVEA	16226	MALVERN AVE	RICHMAN AVE	MALDEN AVE	E	2	AC	2	2,015	36	72,540	12/17/21	82	0	100	0	Cold Mill and Overlay	6/1/18
LKVWDR	15365	LAKEVIEW DR	LAS PALMAS DR	N CITY LIMIT	E	6	AC	2	1,170	28	32,760	5/9/25	82	63	32	5	Surface Treatment - Cape Seal	12/1/24
MODRNO	16850	MODERNO PL	LAKEVIEW DR	END	E	6	AC	2	530	32	16,960	5/9/25	82	57	43	0	Surface Treatment - Cape Seal	12/1/24
HILLVW	14570	HILLVIEW CIR	END	MOUNTAIN RIDGE DR	E	4	AC	2	435	26	11,310	4/21/25	82	0	47	53	New Construction - Initial	1/1/80
TAMRCK	20060	TAMARACK DR	END	HILL AVE	E	2	AC	2	345	32	11,040	2/17/22	82	44	25	31	New Construction - Initial	1/1/80
BEACON	10660	BEACON ST	CLAIRMONT AVE	MYSTIC AVE	E	4	AC	2	741	32	23,712	4/22/25	82	55	45	0	Surface Treatment - Slurry Seal	5/25/20
OXFORD	17570	OXFORD AVE	END	YORBA LINDA BLVD	E	4	AC	2	500	37	18,500	4/21/25	82	0	100	0	New Construction - Initial	1/1/80
PIONEA	17965	PIONEER AVE	AVENIDA SELVA	GILBERT ST	E	8	AC	3	465	32	9,760	4/17/25	82	0	44	56	New Construction - Initial	1/1/80
CITRUS	11760	CITRUS AVE	COMMONWEALTH AVE	SANTA FE R.R. / END	E	7	AC	2	560	32	17,920	4/1/25	82	0	96	4	New Construction - Initial	1/1/80
WALLCE	20900	WALLACE AVE	SANTA CLARA AVE	DEREK DR	E	4	AC	2	1,100	32	35,200	2/27/25	82	17	80	3	Surface Treatment - Slurry Seal	5/25/20
ORANFRON	9905	ORANGETHROPE (FRONTAGE)	BASQUE AVE	ORCHARD AVE	E	1	AC	2	895	26	23,270	4/17/23	82	20	80	0	New Construction - AC	1/1/80
PEARL	17810	PEARL DR	CAMEO LN	SAPPHIRE RD	E	4	AC	2	990	37	36,630	12/3/20	82	0	100	0	Surface Treatment - Slurry Seal	5/25/20
ESTRAL	12990	ESTRALITA PL	END	SUNNY WOOD DR	E	6	AC	2	220	32	7,040	5/9/25	82	65	28	7	Surface Treatment - Slurry Seal	6/1/24
EVRGRN	13020	EVERGREEN AVE	SEQUOIA AVE	LAUREL AVE	E	5	AC	2	1,300	32	41,600	4/22/25	82	0	100	0	Cold Mill and Overlay	8/1/18
SPRUCE	19720	SPRUCE PL	EL MIRARDOR DR	END	E	5	AC	2	245	32	7,840	4/22/25	82	0	71	29	Cold Mill and Overlay	8/1/18
LILLIE	15755	LILLIE AVE	COMMONWEALTH AVE	SANTA FE AVE	E	4	AC	2	490	32	15,680	2/27/25	82	0	85	15	New Construction - Initial	1/1/80
KNSGTN	14995	KENSINGTON DR	MELODY LN	END	E	5	AC	2	670	32	21,440	4/23/25	83	0	83	17	New Construction - Initial	1/1/80
BALFOU	10530	BALFOUR AVE	SAN CARLOS DR	COMMONWEALTH AVE	E	4	AC	2	791	32	25,312	2/27/25	83	0	95	5	New Construction - Initial	1/1/80
EADING	12595	EADINGTON AVE	BAKER AVE	HOUSTON AVE	E	1	AC	2	725	32	23,200	4/11/23	83	53	47	0	New Construction - Initial	1/1/80
LILLIE	15751	LILLIE AVE	WILSHIRE AVE	COMMONWEALTH AVE	E	4	AC	2	635	32	20,320	5/14/25	83	15	85	0	Surface Treatment - Slurry Seal	6/1/24
NORMNA	17140	NORMAN AVE	SUDENE AVE	END	E	3	AC	2	350	27	9,450	5/14/25	83	52	48	0	Surface Treatment - Slurry Seal	6/1/24
QUARTZ	18270	QUARTZ LN	PLACENTIA AVE	SAPPHIRE RD	E	4	AC	2	1,290	37	47,730	2/27/25	83	11	85	4	Surface Treatment - Slurry Seal	5/25/20
VALVWD	50020	VALLEY VIEW DR	LEMON ST	HARBOR BLVD	E	5	AC	2	1,393	32	44,576	2/20/24	83	0	45	55	New Construction - AC	1/1/80
JUNIPR	14970	JUNIPER AVE	END	FLOWER AVE	E	1	AC	2	230	26	5,980	4/12/23	83	26	53	21	Surface Treatment - Slurry Seal	7/1/12
BROOKD	10900	BROOKDALE PL	BERKELEY AVE	PRINCETON CIR EAST	E	3	AC	2	323	32	10,336	11/17/21	83	80	20	0	Surface Treatment - REAS	8/2/23
JHNSTN	14930	JOHNSTON KNOLL	SUNNYCREST DR	END	E	7	AC	2	340	28	9,520	4/8/25	83	0	100	0	New Construction - Initial	1/1/80
BALFOU	10520	BALFOUR AVE	STATE COLLEGE BLVD	SAN CARLOS DR	E	4	AC	2	1,081	32	34,592	2/27/25	83	0	74	26	New Construction - Initial	1/1/80
OAKAVE	17255	OAK AVE	COURTNEY AVE	BROOKHURST RD	E	1	AC	2	1,265	32	40,480	4/18/23	83	0	100	0	Surface Treatment - Slurry Seal	7/1/12
LAMESD	15180	LA MESA DR	LA MESA PL	VALLEY VIEW DR	E	7	AC	2	742	22	16,324	12/22/21	83	0	100	0	New Construction - Initial	1/1/80
MARGLD	16360	MARIGOLD AVE	SUDENE AVE	END	E	3	AC	2	340	32	10,880	5/14/25	83	14	86	0	Surface Treatment - Slurry Seal	6/1/24
WOODCR	21540	WOODCREST AVE	END	RICHMAN AVE	E	2	AC	2	295	32	9,440	11/24/21	83	58	42	0	New Construction - Initial	1/1/80
YALEAV	21620	YALE AVE	END	GLENWOOD AVE	E	3	AC	2	465	32	14,880	11/17/21	83	0	17	83	New Construction - Initial	1/1/80
BALBOA	10470	BALBOA RD	END	BASTANCHURY RD	E	6	AC	2	360	32	11,520	12/4/20	83	0	75	25	New Construction - Initial	1/1/80
RANCH	18310	RANCH RD	CONCORD AVE	STATE COLLEGE BLVD	E	5	AC	2	145	32	4,640	5/8/25	83	38	62	0	New Construction - Initial	1/1/80
ELLISL	12810	ELLIS LN	POMONA AVE	ELLIS PL	E	3	AC	2	481	16	7,696	2/17/22	83	0	73	27	New Construction - Initial	1/1/80
WALNTA	20950	WALNUT AVE	HARBOR BLVD BRIDGE	LEMON ST BRIDGE	E	3	AC	2	1,215	32	38,880	12/1/21	83	0	100	0	New Construction - Initial	1/1/80
DEERPK	12290	DEERPARK DR	GARNET LN	MADISON AVE	E	4	AC	2	1,620	37	59,940	2/27/25	83	0	36	64	New Construction - Initial	1/1/80
LWRNCE	15660	LAWRENCE AVE	WILSHIRE AVE	COMMONWEALTH AVE	E	3	AC	2	685	32	21,920	11/22/21	83	48	52	0	New Construction - Initial	1/1/80
OAKRDG	17315	OAK RIDGE CT	END	MOUNTAIN RIDGE DR	E	4	AC	2	270	26	7,020	4/21/25	83	0	58	42	New Construction - Initial	1/1/80
TRUSLW	20325	TRUSLOW AVE	HIGHLAND AVE	HARBOR BL	E	2	AC	2	1,400	32	44,800	12/1/21	83	0	100	0	New Construction - Initial	1/1/80
PONDRS	18005	PONDEROSA AVE	EVERGREEN AVE	LARK ELLEN DR	E	5	AC	2	1,637	32	52,384	5/14/25	84	71	29	0	New Construction - Initial	1/1/80
EDGARP	12620	EDGAR PL	END	GLENWOOD AVE	E	3	AC	2	110	51	5,610	11/15/21	84	0	90	10	New Construction - Initial	1/1/80
SANANT	19070	SAN ANTONIO AVE	LANTANA AVE	BREA BLVD	E	6	AC	2	1,175	32	37,600	4/22/25	84	53	44	3	Surface Treatment - Slurry Seal	5/25/20
BURTPL	11010	BURT PL	CYPRESS WAY	END	E	4	AC	2	223	32	7,136	4/21/25	84	35	65	0	Surface Treatment - Slurry Seal	5/25/20
MYSTIC	17010	MYSTIC AVE	CAMBRIDGE AVE	PLACENTIA AVE	E	4	AC	2	1,140	32	36,480	11/24/20	84	31	48	21	Surface Treatment - Slurry Seal	5/25/20
CORNEL	11930	CORNELL AVE	DOROTHY LN	GLENWOOD AVE	E	3	AC	2	700	32	22,400	11/17/21	84	27	73	0	New Construction - Initial	1/1/80
ROBRTA	18675	ROBERTA AVE	RICHMAN AVE	MAXZIM AVE	E	2	AC	2	550	26	14,300	11/24/21	84	0	100	0	New Construction - Initial	1/1/80
PUENTE	18240	PUENTE ST	EADINGTON DR	END	E	6	AC	2	1,570	36	56,520	12/23/20	84	0	100	0	New Construction - Initial	1/1/80
ELMIRA	12725	EL MIRADOR DR	BREA BLVD	HEMLOCK PL	E	5	AC	2	1,035	32	33,120	4/22/25	84	0	100	0	Surface Treatment - Slurry Seal	8/1/18
TERIPL	20100	TERI PL	AMHERRST AVE	MILTON AVE	E	4	AC	2	618	32	19,776	11/24/20	84	32	68	0	New Construction - Initial	1/1/80
WOODCR	21515	WOODCREST AVE	EADINGTON AVE	BASQUE AVE	E	1	AC	2	985	32	31,520	4/17/23	84	0	100	0	Surface Treatment - Slurry Seal	7/1/12
MOTMVS	16870	MONTE MAR VISTA DR	END	WOODS AVE	E	2	AC	2	145	28	4,060	12/20/21	84	0	79	21	New Construction - Initial	1/1/80
ANNIN	9010	ANNIN AVE	WILSHIRE AVE	COMMONWEALTH AVE	E	3	AC	2	767	32	24,544	12/6/21	84	37	63	0	New Construction - Initial	1/1/80
BROOKD	10870	BROOKDALE PL	FERN DR	END	E	7	AC	2	417	28	11,676	5/8/25	84	83	17	0	New Construction - Initial	1/1/80
SOGATE	19640	SOUTHGATE AVE	PACIFIC DR	BASQUE AVE	E	1	AC	2	1,010	32	32,320	4/21/25	84	30	61	9	Surface Treatment - Slurry Seal	7/1/12
BURTON	11020	BURTON ST	RAYMOND AVE	MANHATTAN AVE	E	3	AC	2	1,454	32	46,528	12/17/21	84	0	74	26	New Construction - Initial	1/1/80
WILDWD	21280	WILDWOOD CT	N END	MOUNTAIN RIDGE DR	E	4	AC	2	270	26	7,020	4/21/25	84	0	66	34	New Construction - Initial	1/1/80
RIVRSD	18612	RIVERSIDE DR	LINDENDALE AVE	FERNDALE AVE	E	3	AC	2	535	36	19,260	11/15/21	84	0	100	0	New Construction - Initial	1/1/80
BIRCH	10805	BIRCH PL	BEECHWOOD AVE	END	E	5	AC	2	380	32	12,160	11/25/20	84	0	50	50	New Construction - Initial	1/1/80
ANNIN	9015	ANNIN AVE	COMMONWEALTH AVE	S END	E	3	AC	2	750	26	19,500	5/14/25	84	70	30	0	Surface Treatment - Slurry Seal	6/1/24
COYOTE	12060	COYOTE HILLS DR	END	GILBERT ST	E	8	AC	2	1,520	36	54,720	5/14/25	84	0	96	4	Surface Treatment - Slurry Seal	6/1/24
MNTRDG	16940	MOUNTAIN RIDGE DR	STATE COLLEGE BLVD	BASTANCHURY RD	E	4	AC	2	1,952	32	62,464	4/21/25	84	0	79	21	New Construction - Initial	1/1/80
SUNKNL	19900	SUNNY KNOLL	SUNNYCREST DR	END	E	7	AC	2	530	32	16,960	4/8/25	84	0	50	50	New Construction - Initial	1/1/80
WALNTA	21000	WALNUT AVE	ACACIA AVE	HALE AVE	E	4	AC	2	950	36	34,200	3/18/25	85	18	82	0	Surface Treatment - Slurry Seal	5/25/20

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
MEDFRD	16550	MEDFORD PL	END	MYSTIC AVE	E	4	AC	2	230	32	7,360	11/24/20	85	16	84	0	Surface Treatment - Slurry Seal	5/25/20
PINCRT	17930	PINECREST CT	END	MOUNTAIN RIDGE DR	E	4	AC	2	225	26	5,850	4/21/25	85	0	66	34	New Construction - Initial	1/1/80
VALEND	20475	VALENCIA DR	HARBOR BLVD	LEMON AVE	E	3	AC	2	1,265	32	40,480	11/29/21	85	49	51	0	New Construction - Initial	1/1/80
SUNCRT	19865	SUNNYCREST DR	VALENCIA MESA DR	SUNNY KNOLL	E		AC	0	375	32	12,000	4/8/25	85	0	100	0	New Construction - Initial	1/1/10
OAKAVE	17240	OAK AVE	MAGNOLIA AVE	JENSEN WAY	E	1	AC	2	1,850	32	59,200	4/20/23	85	28	72	0	New Construction - Initial	1/1/80
HIGLND	14397	HIGHLAND AVE	WALNUT AVE	TRUSLOW AVE	E	7	AC	2	1,105	32	35,360	12/15/21	85	28	70	2	New Construction - Initial	1/1/80
ELDORA	12690	EL DORADO DR	VALLEY VIEW DR	DEL MONTE WEST	E	2	AC	2	1,520	32	48,640	12/3/21	85	45	55	0	New Construction - Initial	1/1/80
SHEFLD	19455	SHEFFIELD PL	W END	BEACON ST	E	4	AC	2	271	32	8,672	11/24/20	85	0	100	0	Surface Treatment - Slurry Seal	5/25/20
LRKELN	15415	LARK ELLEN DR	EVERGREEN AVE	PONDEROSA AVE	E	5	AC	2	309	32	9,888	4/22/25	85	0	100	0	Cold Mill and Overlay	8/1/18
LAGUNA	15315	LAGUNA RD	BASTANCHURY RD	VALENCIA MESA DR	E	7	AC	2	825	36	29,700	4/18/25	85	0	40	60	New Construction - Initial	1/1/80
BEECHW	10715	BEECHWOOD AVE	LIVE OAK AVE	END	E	5	AC	2	130	32	4,160	6/5/26	85	52	48	0	Surface Treatment - REAS	8/28/25
HIDEWY	14330	HIDEAWAY LN	END	HERMOSA DR	E	6	AC	2	320	27	8,640	5/8/25	85	32	41	27	Surface Treatment - Slurry Seal	6/1/24
MILTON	16720	MILTON AVE	ASSOCIATED RD	DEREK DR	E	4	AC	2	1,190	32	38,080	11/24/20	85	0	96	4	Surface Treatment - Slurry Seal	5/25/20
HARTPL	14130	HART PL	SUDENE AVE	END	E	3	AC	2	350	27	9,450	5/14/25	85	21	79	0	New Construction - Initial	1/1/80
PINTAL	17940	PINTAIL DR	SPARROW DR	ROLING HILLS DR	E	4	AC	2	165	36	5,940	2/27/25	85	0	85	15	Surface Treatment - Slurry Seal	5/25/20
WLMSON	21300	WILLIAMSON AVE	JENSEN AVE	GILBERT ST	E	7	AC	2	840	32	26,880	4/27/23	85	0	31	69	New Construction - Initial	1/1/80
VENTRA	20640	VENTURA PL	WALNUT AVE	END	E	7	AC	2	230	32	7,360	4/27/23	85	0	47	53	New Construction - Initial	1/1/80
WALNTA	20910	WALNUT AVE	PINE DR	END	E	7	AC	2	1,405	32	44,960	4/27/23	85	52	27	21	New Construction - Initial	1/1/80
EDWARD	12640	EDWARD AVE	COMMONWEALTH AVE	CAROL DR	E	7	AC	2	510	32	16,320	4/20/23	85	0	25	75	New Construction - Initial	1/1/80
ADLENA	6030	ADLENA DR	CHAPMAN AVE	GREGORY AVE	E	7	AC	2	1,015	26	26,390	4/23/25	86	0	16	84	New Construction - Initial	1/1/80
HIGCRT	14340	HIGHCREST CT	MOUNTAIN RIDGE DR	END	E	4	AC	2	150	26	3,900	4/21/25	86	0	82	18	New Construction - Initial	1/1/80
SUNCRT	19880	SUNNYCREST DR	RICHMAN AVE	VALLEY VIEW DR	E		AC	0	1,810	32	57,920	4/8/25	86	0	100	0	New Construction - Initial	1/1/10
VALVWD	20575	VALLEY VIEW DR	CARHART AVE	LA MESA	E	7	AC	2	1,335	36	48,060	4/25/23	86	0	76	24	New Construction - Initial	1/1/80
MIMOSA	16730	MIMOSA PL	SEQUIOA AVE	END	E	5	AC	2	130	32	4,160	11/25/20	86	0	100	0	New Construction - Initial	1/1/80
MISSON	16840	MISSION DR	BALFOUR AVE	COMMONWEALTH AVE	E	4	AC	2	235	32	7,520	2/27/25	86	0	100	0	New Construction - Initial	1/1/80
GLNWOD	13630	GLENWOOD AVE	HARBOR BLVD	END	E	3	AC	2	510	32	16,320	5/8/25	86	0	21	79	Surface Treatment - Slurry Seal	6/1/24
LNGSPR	15990	LONG SPUR DR	END	STARLING DR	E	4	AC	2	910	32	24,160	2/27/25	86	0	100	0	Surface Treatment - Slurry Seal	5/25/20
LINCOL	15820	LINCOLN AVE	END	WALNUT AVE	E	3	AC	2	495	32	15,840	11/19/21	86	0	100	0	Grinding (Localized)	7/1/12
CLARIO	11840	CLARION DR	LAKEVIEW DR	TERRAZA PL	E	6	AC	2	1,200	32	38,400	12/11/20	86	0	58	42	New Construction - Initial	1/1/80
FLORNC	13240	FLORENCE PL	END	GREGORY AVE	E	7	AC	2	450	26	11,700	4/2/25	86	0	26	74	New Construction - Initial	1/1/80
SNTFEA	19280	SANTA FE AVE	LILLIE AVE	STATE COLLEGE BLVD	E	4	AC	2	455	32	14,560	4/14/25	86	17	76	7	New Construction - Initial	1/1/80
TEALDR	20090	TEAL DR	LONGSPUR DR	SPARROW DR	E	4	AC	2	520	32	16,640	2/27/25	86	0	100	0	Surface Treatment - Slurry Seal	5/25/20
ACACIA	5000	ACACIA AVE	LADERA VISTA DR	RIDGEMONT CT	E	5	AC	2	596	36	33,840	1/6/21	86	0	86	14	New Construction - Initial	1/1/80
ROSALI	18860	ROSALIA DR	N ST COLLEGE BL	LARK ELLEN DR	E	5	AC	2	1,410	32	45,120	6/5/26	86	73	27	0	Surface Treatment - REAS	8/28/25
ELMIRA	12730	EL MIRADOR DR	HEMLOCK PL	SPRUCE PL	E	5	AC	2	551	32	17,632	4/22/25	86	0	61	39	Cold Mill and Overlay	8/1/18
BEECHW	10690	BEECHWOOD AVE	WILLOW AVE	WOODBINE AVE	E	5	AC	2	1,111	32	35,552	11/25/20	86	0	83	17	New Construction - Initial	1/1/80
TREEVW	20290	TREEVIEW PL	END	MEDFORD PL	E	4	AC	2	530	32	16,960	11/24/20	86	0	100	0	Surface Treatment - Slurry Seal	5/25/20
GILBES	13540	GILBERT ST	VALENCIA DR	OLIVE AVE	E	1	AC	2	1,460	32	46,720	5/9/25	86	85	15	0	Surface Treatment - Slurry Seal	6/1/24
ELMIRA	12720	EL MIRADOR DR	LANTANA AVE	MULBERRY AVE	E	6	AC	2	889	32	28,448	12/4/20	86	0	100	0	Surface Treatment - Slurry Seal	5/25/20
JANET	14830	JANET PL	SUDENE AVE	END	E	3	AC	2	340	27	9,180	5/14/25	86	17	83	0	Surface Treatment - Slurry Seal	6/1/24
CAROL	11480	CAROL DR	VERMONT AVE	GILBERT ST	E	7	AC	2	1,322	32	42,304	4/27/23	86	69	28	3	New Construction - Initial	1/1/80
PACFIC	17606	PACIFIC DR	ROBERTA AVE	HOUSTON AVE	E	1	AC	2	465	32	14,880	4/11/23	86	17	59	24	New Construction - Initial	1/1/80
JHNSON	14920	JOHNSON PL	CARHART AVE	STEPHENS AVE	E	7	AC	2	410	28	11,480	12/23/21	86	0	100	0	New Construction - Initial	1/1/80
SPARRW	19700	SPARROW DR	PINTAIL DR	END	E	4	AC	2	505	32	16,160	2/27/25	86	0	100	0	Surface Treatment - Slurry Seal	5/25/20
VALVWD	20570	VALLEY VIEW DR	BASTANCHURY RD	CARHART AVE	E	7	AC	2	710	36	25,560	4/25/23	86	0	100	0	New Construction - Initial	1/1/80
OLIVE	17395	OLIVE AVE	LINDY PL	PINE DR	E	1	AC	2	1,245	32	39,840	4/20/23	86	0	100	0	Cold Mill and Overlay	10/1/17
LEMONS	15730	LEMON ST	VIRGINIA RD	BERKELEY AVE	E	3	AC	2	1,704	32	54,528	12/21/21	86	29	52	19	New Construction - Initial	1/1/80
RICHMN	18520	RICHMAN AVE	COMMONWEALTH AVE	END	E	2	AC	2	570	32	18,240	12/2/21	86	0	100	0	Mill, Overlay w/Fabric (1.5 In)	7/1/12
HARTFD	14140	HARTFORD AVE	ROLLING HILLS DR	TREEVIEW PL	E	4	AC	2	141	35	4,935	2/27/25	87	16	53	31	Surface Treatment - Slurry Seal	5/25/20
RICHMN	18510	RICHMAN AVE	CHAPMAN AVE	COMMONWEALTH AVE	E	2	AC	2	1,225	32	39,200	12/2/21	87	0	100	0	New Construction - Initial	1/1/80
WOODSA	21560	WOODS AVE	GRANDVIEW AVE	CHAPMAN AVE	E	2	AC	2	775	32	24,800	12/2/21	87	0	94	6	New Construction - Initial	1/1/80
FERNDR	13110	FERN DR	CARHART AVE	VALLEY VIEW DR	E	7	AC	2	1,726	32	55,232	4/25/23	87	0	62	38	New Construction - Initial	1/1/80
HALLAV	14010	HALL AVE	ASH AVE	N END	E	3	AC	2	178	26	4,628	2/17/22	87	0	100	0	New Construction - Initial	1/1/80
LAUREL	15630	LAUREL AVE	LARK ELLEN DR	MAPLE AVE	E	5	AC	2	575	32	18,400	5/14/25	87	0	100	0	New Construction - Initial	1/1/80
MNTVWP	16960	MOUNTAIN VIEW PL	CHAPMAN AVE	WILSHIRE AVE	E	4	AC	2	495	32	15,840	5/8/25	87	75	25	0	Surface Treatment - Slurry Seal	6/1/24
CAMISO	11265	CAMINO DEL SOL	PASEO DORADO	DOMINGO RD	E	8	AC	2	430	32	13,760	4/18/25	87	0	100	0	New Construction - Initial	1/1/80
CORNEL	11955	CORNELL AVE	COMMONWEALTH AVE	WALNUT AVE	E	3	AC	2	700	32	22,400	11/19/21	87	0	100	0	MILL and OVERLAY	7/1/12
LINCOL	15800	LINCOLN AVE	NUTWOOD AVE	BROOKDALE PL	E	3	AC	2	344	32	11,008	11/15/21	87	0	31	69	Surface Treatment - REAS	7/1/23
EASRDG	12600	EASTRIDGE KNOLL	END	VALLEY VIEW DR	E	7	AC	2	220	28	6,160	4/8/25	87	62	32	6	New Construction - Initial	1/1/80
LNGSPR	16000	LONG SPUR DR	STARLING DR	END	E	4	AC	2	652	32	8,640	2/27/25	87	0	100	0	Surface Treatment - Slurry Seal	5/25/20
ELMAVE	12871	ELM AVE	WASHINGTON AVE	WOODS AVE	E	2	AC	2	261	32	8,352	2/17/22	87	0	100	0	New Construction - Initial	1/1/80
WHTNGA	21265	WHITING AVE	MOUNTAIN VIEW PL	HALE AVE	E	4	AC	2	520	32	16,640	5/14/25	87	22	78	0	Surface Treatment - Slurry Seal	6/1/24
HLLTOP	14560	HILLTOP CT	MOUNTAIN RIDGE DR	N END	E	4	AC	2	275	26	7,150	4/21/25	87	0	100	0	New Construction - Initial	1/1/80
VALVWD	20580	VALLEY VIEW DR	EUCLID AVE	WOODS AVE	E	7	AC	2	1,301	32	41,632	4/8/25	87	10	61	29	New Construction - Initial	1/1/80
BUENAV	10970	BUENA VISTA DR	ROSE DR	MALVERN AVE	E	7	AC	2	715	26	18,590	4/2/25	87	0	100	0	Complete Reconstruction - AC	11/1/16
WALNTA	21010	WALNUT AVE	HALE AVE	STATE COLLEGE BLVD	E	4	AC	2	1,600	36	57,600	3/18/25	87	31	65	4	Surface Treatment - Slurry Seal	5/25/20
WHTNGA	21240	WHITING AVE	FORD AVE	HIGHLAND AVE	E	2	AC	2	625	32	20,000	12/22/21	87	0	100	0	New Construction - Initial	1/1/80
WOODBN	21490	WOODBINE AVE	ROLLING HILLS DR	END	E	5	AC	2	805	32	25,760	11/25/20	87	0	61	39	New Construction - Initial	1/1/80
REVERE	18470	REVERE AVE	CONCORD AVE	STATE COLLEGE BLVD	E	4	AC	2	415	32	13,280	5/14/25	87	51	49	0	Surface Treatment - Slurry Seal	6/1/24
FIRETHN	13210	FIRETHORNE AVE	BERNARD DR	ARROUES DR	E	6	AC	2	900	32	28,800	4/22/25	87	34	66	0	Surface Treatment - Slurry Seal	5/25/20
ROBRTA	18650	ROBERTA AVE	EADINGTON DR	BASQUE AVE	E	1	AC	2	965	32	30,880	4/11/23	87	42	29	29	Surface Treatment - Slurry Seal	7/1/12
ASHFOR	102010	ASHFORD PL	END	WILSHIRE AVE	E	3	AC	2	408	26	10,608	12/6/21	87	0	100	0	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
FRANCS	50010	FRANCES AVE	SKYLINE DR	N END	E	5	AC	2	118	32	3,776	11/17/20	87	0	100	0	New Construction - AC	1/1/80
STARLG	19800	STARLING DR	LONGSPUR DR	PLACENTIA AVE	E	4	AC	2	145	44	6,380	2/27/25	87	31	69	0	Surface Treatment - Slurry Seal	5/25/20
WOODSA	21575	WOODS AVE	COMMONWEALTH	S END	E	2	AC	2	580	32	18,560	12/2/21	87	35	65	0	New Construction - Initial	1/1/80
SHERWD	19470	SHERWOOD AVE	AMHERST AVE	DEREK DR	E	4	AC	2	680	32	21,760	11/24/20	87	0	100	0	New Construction - Initial	1/1/80
PONDRS	18000	PONDEROSA AVE	ROLLING HILLS DR	EVERGREEN AVE	E	5	AC	2	821	32	26,272	4/22/25	87	0	100	0	Cold Mill and Overlay	8/1/18
LOCUST	15930	LOCUST DR	VALENCIA DR	OAK AVE	E	1	AC	2	760	32	24,320	3/25/25	87	0	30	70	Complete Reconstruction - AC	6/1/18
DELMON	12310	DEL MONTE WEST	RICHMAN AVE	EL DORADO DR	E	2	AC	2	330	32	10,560	12/17/21	87	0	100	0	New Construction - Initial	1/1/80
ASHFOR	10230	ASHFORD PL	SUDENE AVE	END	E	3	AC	2	301	26	7,826	5/14/25	87	0	100	0	Surface Treatment - Slurry Seal	6/1/24
ARROUE	10010	ARROUES DR	N END	LANTANA AVE	E	6	AC	2	1,300	32	41,600	4/22/25	87	0	57	43	Surface Treatment - Slurry Seal	5/25/20
HOUSTN	14660	HOUSTON AVE	ROBERTA AVE	PACIFIC DR	E	1	AC	2	975	32	31,200	4/11/23	87	45	46	9	Surface Treatment - Slurry Seal	7/1/12
MALVEA	16230	MALVERN AVE	MALDEN AVE	HARBOR BLVD	E	2	AC	2	620	36	22,320	12/17/21	87	0	100	0	New Construction - Initial	1/1/80
DOLORE	12410	DOLORES DR	END	MARGARITA DR	E	7	AC	2	310	28	8,680	5/8/25	87	55	27	18	Surface Treatment - REAS	8/16/24
IRISCT	14730	IRIS CT	END	GILBERT ST	E	1	AAC	2	720	32	23,040	4/17/23	87	0	100	0	Overlay - AC Structural	4/16/22
WALNTA	20970	WALNUT AVE	BALCOM AVE	END	E	3	AC	2	1,920	32	61,440	11/19/21	87	0	100	0	New Construction - Initial	1/1/80
RIDGTP	18570	RIDGETOP LN	END	SKYLINE DR	E	5	AC	2	1,025	32	32,800	12/3/20	87	0	94	6	New Construction - Initial	1/1/80
HALEAV	13890	HALE AVE	WHITING AVE	WILSHIRE AVE	E		AC	0	325	32	10,400	5/14/25	88	0	100	0	Surface Treatment - Slurry Seal	6/1/24
HIGLND	50140	HIGHLAND AVE	RICHMAN AVE	END	E	7	AC	2	720	32	25,290	4/9/25	88	0	100	0	New Construction - Initial	1/1/80
CAROL	11490	CAROL DR	GILBERT ST	END	E	7	AC	2	1,832	32	58,624	4/27/23	88	0	28	72	New Construction - Initial	1/1/80
MIDLSX	16680	MIDDLESEX PL	END	MYSTIC AVE	E	4	AC	2	460	32	14,720	11/24/20	88	0	100	0	Surface Treatment - Slurry Seal	5/25/20
RANDEE	18330	RANDEE WAY	END	MAGNOLIA AVE	E	7	AC	2	555	32	17,760	5/9/25	88	27	32	41	Surface Treatment - Slurry Seal	6/1/24
BLURID	10820	BLUERIDGE CT	END	MOUNTAIN RIDGE DR	E	4	AC	2	241	26	6,266	4/21/25	88	0	97	3	New Construction - Initial	1/1/80
HIGLND	14395	HIGHLAND AVE	COMMONWEALTH AVE	PCC 140' N/ WALNUT AVE	E	2	AC	2	535	40	20,190	12/3/21	88	0	90	10	New Construction - Initial	1/1/80
FERNDR	13100	FERN DR	BROOKDALE PL	CARHART AVE	E	7	AC	2	1,973	32	63,136	4/25/23	88	0	100	0	New Construction - Initial	1/1/80
FLOWER	13260	FLOWER AVE	MAGNOLIA AVE	VINE AVE	E	1	AC	2	580	32	18,560	4/20/23	88	0	47	53	Cold Mill and Overlay	10/1/17
GRNVWP	13770	GREENVIEW PL	MEDFORD PL	END	E	4	AC	2	620	32	19,840	11/24/20	88	0	72	28	Surface Treatment - Slurry Seal	5/25/20
SANDLW	19100	SANDALWOOD AVE	SEQUOIA AVE	LIME AVE	E	5	AC	2	1,320	32	42,240	11/25/20	88	0	87	13	New Construction - Initial	1/1/80
BASQUE	10595	BASQUE AVE	COMMONWEALTH AVE	GATE	E	7	AC	2	176	32	5,632	4/2/25	88	0	49	51	New Construction - Initial	1/1/80
TRUSLW	20330	TRUSLOW AVE	HARBOR BL	END	E	3	AC	2	1,255	32	40,160	12/1/21	88	0	95	5	New Construction - Initial	1/1/80
HEMLCK	14230	HEMLOCK PL	END	BEECHWOOD AVE	E	5	AC	2	380	32	12,160	11/25/20	88	0	100	0	New Construction - Initial	1/1/80
AVOLEN	10390	AVOLENCIA DR	SUNNYCREST DR	RICHMAN AVE	E	7	AC	2	1,288	28	36,064	4/8/25	88	0	23	77	New Construction - Initial	1/1/80
ROBRTA	1840	ROBERTA AVE	PACIFIC DR	EADINGTON DR	E	5	AC	2	1,108	32	35,456	4/11/23	88	19	81	0	Surface Treatment - Slurry Seal	7/1/12
DEREK	12370	DEREK DR	BASTANCHURY RD	END	E	4	AC	2	1,860	32	59,520	11/24/20	88	0	100	0	Surface Treatment - Slurry Seal	5/25/20
WINCTR	21475	WINCHESTER ST	HARTFORD ST	CAMBRIDGE AVE	E	4	AC	2	250	32	8,000	4/22/25	88	0	100	0	Surface Treatment - Slurry Seal	5/25/20
WILDWD	21290	WILDWOOD CT	MOUNTAIN RIDGE DR	S END	E	4	AC	2	335	26	8,710	4/21/25	88	0	86	14	New Construction - Initial	1/1/80
RICHMN	18506	RICHMAN AVE	MALVERN AVE	CHAPMAN AVE	E	2	AC	2	455	32	14,560	12/2/21	88	0	100	0	New Construction - Initial	1/1/80
ELMAVE	12920	ELM AVE	END	LAWRENCE AVE	E	3	AC	2	600	32	19,200	11/22/21	88	0	100	0	New Construction - Initial	1/1/80
HLLTOP	14555	HILLTOP CT	BASTANCHURY RD	END	E	5	AC	2	120	26	3,120	4/22/25	88	0	48	52	New Construction - Initial	1/1/80
PECKHM	17830	PECKHAM ST	ORANGETHORPE AVE	END	E	1	AAC	2	910	32	29,120	4/17/23	88	0	95	5	Overlay - AC Structural	4/16/22
VIRGNA	20800	VIRGINIA RD	LEMON ST	LUANNE AVE	E	5	AC	2	605	28	16,940	12/3/20	88	0	100	0	New Construction - Initial	1/1/80
VIACOD	20710	VIA CODO	END	LAKEVIEW DR	E	6	AC	2	615	32	19,680	5/9/25	89	82	10	8	Surface Treatment - Cape Seal	12/1/24
SNTCLA	19205	SANTA CLARA AVE	SAN CARLOS DR	DEREK DR	E	4	AC	2	1,030	32	32,960	2/27/25	89	0	93	7	Surface Treatment - Slurry Seal	5/25/20
CAROL	11470	CAROL DR	END	MAGNOLIA AVE	E	7	AC	2	1,732	32	55,424	4/20/23	89	14	49	37	New Construction - Initial	1/1/80
MAXZIM	16490	MAXZIM AVE	ROOSEVELT AVE	LOMBARD DR	E	2	AC	2	1,720	32	55,040	11/24/21	89	0	100	0	Surface Treatment - Slurry Seal	6/1/19
MARLEN	16300	MARELEN DR	SUNNYCREST DR	ROBIN WAY	E	7	AC	2	1,855	32	59,360	4/8/25	89	0	95	5	New Construction - Initial	1/1/80
KINGPL	15050	KING PL	END	CHAPMAN AVE	E	7	AC	2	530	26	13,780	4/1/25	89	0	75	25	Reconstruct Surface (AC)	7/1/11
WOODCR	21510	WOODCREST AVE	PACIFIC DR	EADINGTON AVE	E	1	AC	2	1,045	32	33,440	4/17/23	89	0	100	0	Surface Treatment - Slurry Seal	7/1/12
RICHMN	18503	RICHMAN AVE	UNION AVE	MALVERN AVE	E	2	AC	2	860	32	27,520	12/2/21	89	0	100	0	New Construction - Initial	1/1/80
AMHERS	8040	AMHERST AVE	TERI PL	END	E	4	AC	2	1,026	32	32,832	4/22/25	89	0	54	46	New Construction - Initial	1/1/80
ARLING	9090	ARLINGTON AVE	PUENTE ST	ARROUES DR	E	6	AC	2	701	32	22,432	4/22/25	89	26	74	0	Surface Treatment - Slurry Seal	5/25/20
LANTAN	15390	LANTANA AVE	BERNARD DR	ROLLING HILLS DR	E	6	AC	2	1,195	32	38,240	4/22/25	89	43	57	0	Surface Treatment - Slurry Seal	5/25/20
MURDOC	16990	MURDOC PL	WALNUT AVE	END	E	7	AC	2	240	32	7,680	4/27/23	89	0	100	0	New Construction - Initial	1/1/80
WOODCR	21520	WOODCREST AVE	BASQUE AVE	ORCHARD AVE	E	1	AC	2	955	32	30,560	4/17/23	89	0	100	0	Surface Treatment - Slurry Seal	7/1/12
WILDWD	21270	WILDWOOD CT	END	HOLLYOAK DR	E	5	AC	2	185	26	4,810	4/22/25	89	0	73	27	New Construction - Initial	1/1/80
GAGEAV	13450	GAGE AVE	PACIFIC DR	EADINGTON AVE	E	1	AC	2	1,080	32	34,560	4/17/23	89	42	55	3	Surface Treatment - Slurry Seal	7/1/12
REVERE	18460	REVERE AVE	MONTAGUE AVE	ANNIN AVE	E	3	AC	2	760	32	24,320	12/6/21	89	0	100	0	New Construction - Initial	1/1/80
ROSSLN	18975	ROSSLYNN AVE	END	LAWRENCE AVE	E	3	AC	2	610	32	19,520	11/22/21	89	0	100	0	New Construction - Initial	1/1/80
CONCOR	11905	CONCORD AVE	AMERIGE AVE	N END	E	4	AC	2	540	32	19,600	5/14/25	89	25	75	0	New Construction - Initial	1/1/80
COYOTE	12090	COYOTE HILLS DR	VINTAGE WAY	CASTLEWOOD DR	E	8	AC	2	1,500	36	54,000	5/14/25	89	0	91	9	Surface Treatment - Slurry Seal	6/1/24
WOODSA	21550	WOODS AVE	N END	GRANDVIEW AVE	E	2	AC	2	1,855	32	59,360	12/2/21	89	0	100	0	New Construction - Initial	1/1/80
ROSALI	18850	ROSALIA DR	ROLLING HILLS DR	LIVE OAK AVE	E	5	AC	2	1,595	32	51,040	5/9/25	89	0	100	0	Reconstruct Surface (AC)	7/1/13
FLOWER	13265	FLOWER AVE	VINE AVE	LINDY PL	E	1	AC	2	980	32	31,360	4/20/23	89	0	79	21	Surface Treatment - Slurry Seal	7/1/12
GLNHVN	13590	GLENHAVEN AVE	RICHMAN AVE	END	E	2	AC	2	690	32	22,080	12/20/21	89	0	65	35	New Construction - Initial	1/1/80
WILSHR	21440	WILSHIRE AVE	ACACIA AVE	CONCORD AVE	E	4	AC	2	2,140	32	68,480	5/14/25	89	25	75	0	Surface Treatment - Slurry Seal	6/1/24
OLDRVR	17355	OLD RIVER RD	CONCORD AVE	SYCAMORE AVE	E	5	AC	2	332	32	10,624	5/8/25	89	25	75	0	New Construction - Initial	1/1/80
LEGGET	15690	LEGGET PL	ROSECRANS AVE	END	E	8	AC	2	764	32	24,448	4/23/25	89	25	75	0	Surface Treatment - Slurry Seal	6/5/24
STEPNS	19810	STEPHENS AVE	FERN DR	JOHNSON PL	E	7	AC	2	1,330	28	37,240	12/23/21	89	0	33	67	New Construction - Initial	1/1/80
VINEAV	20790	VINE AVE	FLOWER	CHERRY AVE	E	1	AC	2	546	32	17,472	4/20/23	89	44	56	0	Surface Treatment - Slurry Seal	7/1/12
NICKLT	17090	NICKLETT AVE	CHERRY AVE	ORANGETHORPE AVE	E	1	AC	2	820	32	26,240	4/18/23	89	0	68	32	Surface Treatment - Slurry Seal	7/1/12
RAYAVE	18340	RAY AVE	PORTER AVE	ORANGETHORPE AVE	E	2	AC	2	290	32	9,280	11/29/21	89	0	98	2	New Construction - Initial	1/1/80
BERNAR	10780	BERNARD DR	FIRETHORNE AVE	MULBERRY AVE	E	6	AC	2	1,106	32	35,392	4/22/25	89	0	71	29	Surface Treatment - Slurry Seal	5/25/20
CITRUS	11780	CITRUS AVE	HILL AVE	PORTER AVE	E	1	AC	2	260	32	8,320	3/18/25	89	16	84	0	Surface Treatment - Slurry Seal	7/1/12
MEDFRD	16540	MEDFORD PL	ROLLING HILLS DR	CLAIRMONT ST	E	4	AC	2	1,140	32	36,480	11/24/20	89	0	92	8	Surface Treatment - Slurry Seal	5/25/20

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
SHAWN	19440	SHAWN LN	AMHERST AVE	DEREK DR	E	4	AC	2	410	32	13,120	11/24/20	90	0	100	0	New Construction - Initial	1/1/80
GRNMDW	13760	GREENMEADOW DR	SUNNYHILLS RD	HERMOSA DR	E	6	AAC	2	1,340	32	42,880	4/18/25	90	14	35	51	Overlay - AC Structural	10/5/24
ELADOB	12660	EL ADOBE PL	END	SUNNY WOOD DR	E	6	AC	2	490	32	15,680	5/9/25	90	0	100	0	Surface Treatment - Slurry Seal	6/1/24
ELMIRA	12710	EL MIRADOR DR	PUENTE ST	FIRETHORNE AVE	E	6	AC	2	670	32	21,440	4/22/25	90	28	72	0	Surface Treatment - Slurry Seal	5/25/20
GAGEAV	13460	GAGE AVE	BASQUE AVE	ORCHARD AVE	E	1	AC	2	920	32	29,440	4/17/23	90	0	95	5	Surface Treatment - Slurry Seal	7/1/12
ANNIN	9000	ANNIN AVE	CHAPMAN AVE	WILSHIRE AVE	E	3	AC	2	528	32	16,896	12/6/21	90	0	100	0	New Construction - Initial	1/1/80
WOODCR	21530	WOODCREST AVE	JEFFERSON AVE	LOMBARD DR	E	2	AC	2	1,295	32	41,440	11/24/21	90	0	100	0	Surface Treatment - Slurry Seal	6/1/19
OAKRDG	17310	OAK RIDGE CT	END	HOLLYOAK DR	E	5	AC	2	165	26	4,290	4/22/25	90	0	100	0	New Construction - Initial	1/1/80
HLCRTD	14520	HILLCREST DR	LEMON ST	END	E	3	AC	2	1,075	32	34,400	4/8/24	90	0	100	0	Surface Treatment - Cape Seal	7/1/23
BAKER	10440	BAKER AVE	ORCHARD AVE	EUCLID ST	E	1	AC	2	1,440	32	46,080	4/11/23	90	0	100	0	Surface Treatment - Slurry Seal	7/1/12
RICMNK	18550	RICHMAN KNOLL	END	VALENCIA MESA DR	E	7	AC	2	2,025	37	74,925	5/8/25	90	0	87	13	Surface Treatment - REAS	8/23/24
SYCMRE	20010	SYCAMORE AVE	OLD RIVER RD	OLD CREEK LN	E	5	AC	2	735	32	23,520	5/8/25	90	0	100	0	New Construction - Initial	1/1/80
BAKER	10410	BAKER AVE	PACIFIC DR	EADINGTON AVE	E	1	AC	2	1,026	32	32,832	4/11/23	90	40	60	0	Surface Treatment - Slurry Seal	7/1/12
LOCUST	15940	LOCUST DR	ROBERTA AVE	HOUSTON AVE	E	1	AC	2	450	32	14,400	4/11/23	90	0	100	0	New Construction - Initial	1/1/80
FORDAV	13340	FORD AVE	WEST AVE	ELM AVE	E	2	AC	2	390	32	12,480	2/17/22	90	0	40	60	New Construction - Initial	1/1/80
WILSHR	21399	WILSHIRE AVE	POMONA AVE	LEMON ST	E	3	AC	2	615	36	22,140	12/3/21	90	0	100	0	Surface Treatment - Slurry Seal	8/1/18
JEFRSN	14890	JEFFERSON AVE	ORANGETHORPE AVE	BAKER AVE	E	2	AC	2	850	32	27,200	11/24/21	90	0	100	0	Surface Treatment - Slurry Seal	6/1/19
SNTFEA	19235	SANTA FE AVE	LEMON ST	LAWRENCE AVE	E	3	AC	2	600	32	19,200	11/19/21	90	0	100	0	Complete Reconstruction - AC	6/1/18
VALEND	20490	VALENCIA DR	END	RAYMOND AVE	E	3	AC	2	630	32	20,160	12/16/21	90	0	88	12	New Construction - Initial	1/1/80
WALNTA	20990	WALNUT AVE	RAYMOND AVE	ACACIA AVE	E	3	AC	2	2,565	36	92,340	12/6/21	90	0	100	0	New Construction - Initial	1/1/80
ROBRTA	18670	ROBERTA AVE	END	RICHMAN AVE	E	2	AC	2	290	26	7,540	11/24/21	90	0	100	0	New Construction - Initial	1/1/80
CARHAR	11440	CARHART AVE	VALLEY VIEW DR	MALVERN AVE	E	7	AC	2	2,056	28	57,568	4/25/23	90	0	94	6	New Construction - Initial	1/1/80
MARGRT	16320	MARGARET PL	CHERRY AVE	END	E	1	AC	2	160	32	5,120	4/18/23	90	0	86	14	Surface Treatment - Slurry Seal	7/1/12
ARROYO	10030	ARROYO DR	ARROYO PL	EUCLID ST	E	7	AC	2	1,071	26	27,846	12/22/21	90	0	73	27	Complete Reconstruction - AC	7/1/17
GAGEAV	13470	GAGE AVE	JEFFERSON AVE	LOMBARD DR	E	2	AC	2	1,280	32	40,960	11/24/21	90	0	100	0	Surface Treatment - Slurry Seal	6/1/19
LEEAVE	50170	LEE AVE	ASH AVE	OLIVE AVE	E	1	AC	2	799	32	25,568	3/19/25	90	0	100	0	New Construction - AC	1/1/80
MALDEN	16200	MALDEN AVE	COMMONWEALTH AVE	SANTA FE AVE	E	2	AC	2	330	32	10,560	12/3/21	90	0	100	0	New Construction - Initial	1/1/80
CLARMT	11830	CLAIRMONT AVE	CAMBRIDGE AVE	PLACENTIA AVE	E	4	AAC	2	1,195	37	44,215	4/22/25	90	0	100	0	Overlay - AC Structural	5/25/20
WILSHR	21430	WILSHIRE AVE	MONTAGUE AVE	ACACIA AVE	E	3	AC	2	1,798	36	64,728	12/6/21	90	0	100	0	Surface Treatment - Slurry Seal	8/1/18
STANFD	19750	STANFORD AVE	END	COLLEGE PL	E	3	AC	2	460	32	14,720	11/17/21	90	0	41	59	New Construction - Initial	1/1/80
CHERRY	11690	CHERRY AVE	VINE AVE	PAULA DR	E	1	AC	2	1,860	32	59,520	4/18/23	91	0	94	6	Surface Treatment - Slurry Seal	7/1/12
PORTER	18025	PORTER AVE	VINE AVE	END	E	1	AC	2	565	26	14,690	4/18/23	91	0	89	11	Surface Treatment - Slurry Seal	7/1/12
BAKER	10430	BAKER AVE	BASQUE AVE	ORCHARD AVE	E	1	AC	2	912	32	29,184	4/11/23	91	0	100	0	Surface Treatment - Slurry Seal	7/1/12
WLMSON	21330	WILLIAMSON AVE	WOODS AVE	CHESTNUT PL	E	2	AC	2	740	36	26,640	12/1/21	91	0	100	0	New Construction - Initial	1/1/80
MEADE	16520	MEADE AVE	OAK AVE	END	E	1	AC	2	1,200	32	38,400	4/27/23	91	0	95	5	Surface Treatment - Slurry Seal	10/1/22
HARTPL	14120	HART PL	REVERE AVE	END	E	3	AC	2	470	32	15,040	12/6/21	91	0	100	0	New Construction - Initial	1/1/80
HERMSP	14290	HERMOSA PL	END	LAS PALMAS DR	E	6	AC	2	1,210	32	38,720	5/8/25	91	27	68	5	Surface Treatment - Cape Seal	12/1/24
NAPAPL	17030	NAPA PL	WALNUT AVE	END	E	7	AC	2	235	32	7,520	4/27/23	91	0	67	33	New Construction - Initial	1/1/80
HOUSTN	14690	HOUSTON AVE	BASQUE AVE	ORCHARD AVE	E	1	AC	2	950	32	30,400	4/11/23	91	0	100	0	New Construction - Initial	1/1/80
BEACON	10650	BEACON ST	END	CLAIRMONT AVE	E	4	AAC	2	338	32	10,816	4/22/25	91	0	100	0	Overlay - AC Structural	5/25/20
ASHAVE	10090	ASH AVE	PINE DR	COURTNEY AVE	E	1	AC	2	985	26	26,410	4/18/23	91	0	95	5	Surface Treatment - Slurry Seal	7/1/12
LEMONS	15720	LEMON ST	BREA BLVD	VIRGINIA RD	E	5	AC	2	1,344	32	43,008	12/3/20	91	0	100	0	New Construction - Initial	1/1/80
CHARLE	11680	CHARLES AVE	SAN ANTONIO AVE	ROLLING HILLS DR	E	6	AC	2	590	32	18,880	4/22/25	91	0	96	4	Surface Treatment - Slurry Seal	5/25/20
SNTFEA	19270	SANTA FE AVE	MOUNTAIN VIEW PL	END	E	4	AC	2	425	32	13,600	4/21/25	91	0	100	0	Surface Treatment - Slurry Seal	5/25/20
LILLIE	15750	LILLIE AVE	END	WILSHIRE AVE	E	4	AC	2	215	26	8,090	5/14/25	91	0	100	0	Surface Treatment - Slurry Seal	6/1/24
GLNVWD	13600	GLEN VIEW DR	N END	VALENCIA MESA DR	E	7	AC	2	320	32	10,240	5/8/25	91	0	100	0	Surface Treatment - REAS	8/16/24
ANDOVE	8080	ANDOVER AVE	TERI PL	DEREK DR	E	4	AC	2	997	32	31,904	4/22/25	91	0	100	0	New Construction - Initial	1/1/80
HARTFD	14145	HARTFORD AVE	TREEVIEW PL	END	E	4	AC	2	328	32	10,496	12/4/20	91	0	67	33	Surface Treatment - Slurry Seal	5/25/20
AMHERS	8050	AMHERST AVE	DEREK DR	END	E	4	AC	2	300	32	9,600	4/22/25	91	0	100	0	Surface Treatment - Slurry Seal	5/25/20
MNTVWP	16970	MOUNTAIN VIEW PL	COMMONWEALTH AVE	SANTA FE AVE	E	4	AC	2	490	32	15,680	4/21/25	91	0	100	0	Surface Treatment - Slurry Seal	5/25/20
EDWARD	12645	EDWARD AVE	CAROL DR	VALENCIA DR	E	7	AC	2	712	32	22,784	4/20/23	91	24	70	6	New Construction - Initial	1/1/80
ORANGE	17470	ORANGE AVE	WOODCREST AVE	BAKER AVE	E	1	AC	2	510	32	16,320	4/17/23	91	0	48	52	Surface Treatment - Slurry Seal	7/1/12
ROBRTA	18630	ROBERTA AVE	END	GILBERT ST	E	1	AAC	2	665	32	21,280	4/17/23	91	0	100	0	Overlay - AC Structural	4/16/22
ROOSVT	18840	ROOSEVELT AVE	BAKER AVE	HOUSTON AVE	E	2	AC	2	775	32	24,800	11/24/21	91	0	100	0	Surface Treatment - Slurry Seal	6/1/19
DORTHL	12495	DOROTHY LN	HORNET WY	LONGVIEW DR	E	3	AC	2	941	36	33,876	11/15/21	91	0	100	0	New Construction - Initial	3/1/11
GILBES	13550	GILBERT ST	OLIVE AVE	ORANGETHORPE AVE	E	1	AC	2	1,100	32	35,200	5/9/25	91	0	100	0	Surface Treatment - Slurry Seal	6/8/24
ELRANC	12780	EL RANCHO VISTA	CANYON DR	SUNSET LN	E	8	AAC	2	1,045	32	33,440	4/21/25	91	0	47	53	Overlay - AC Structural	5/25/19
SUDENE	19840	SUDENE AVE	MOUNTAIN VIEW PL	END	E	4	AC	2	405	32	12,960	4/21/25	91	0	100	0	Surface Treatment - Slurry Seal	5/25/20
WALNTA	20980	WALNUT AVE	END	RAYMOND AVE	E	3	AC	2	625	32	20,000	12/6/21	91	0	100	0	New Construction - Initial	1/1/80
WOODSA	21590	WOODS AVE	ORANGETHORPE	END	E	2	AC	2	1,784	32	57,088	11/24/21	91	25	75	0	Surface Treatment - Slurry Seal	6/1/19
MRMNT	16830	MIRAMONTE DR	VALENCIA MESA DR	VALENCIA MESA DR	E	7	AC	2	1,240	35	43,400	5/8/25	91	0	100	0	Surface Treatment - REAS	8/16/24
CAMBRI	11145	CAMBRIDGE AVE	CLAIRMONT AVE	MARYMONT AVE	E	4	AAC	2	378	32	12,096	4/22/25	91	0	100	0	Overlay - AC Structural	5/25/20
MAXZIM	16505	MAXZIM AVE	RICHMAN AVE	ROBERTA AVE	E	2	AC	2	754	26	19,604	11/24/21	91	0	100	0	New Construction - Initial	1/1/80
MALVEA	16220	MALVERN AVE	WOODS AVE	DRAKE AVE	E	2	AC	2	680	32	21,760	12/20/21	91	0	100	0	New Construction - Initial	1/1/80
MIMOSA	16740	MIMOSA PL	MAPLE AVE	BEECHWOOD AVE	E	5	AC	2	1,315	32	42,080	11/25/20	91	0	100	0	MILL and OVERLAY	7/1/13
OLIVER	17440	OLIVER DR	VALLEY VIEW DR	FERN DR	E	2	AC	2	260	28	7,280	5/8/25	92	67	33	0	Surface Treatment - Slurry Seal	6/11/24
FRANKN	13370	FRANKLIN AVE	HASTINGS AVE	MEADE AVE	E	1	AAC	2	595	32	19,040	4/27/23	92	0	48	52	Overlay - AC Structural	4/16/22
HOUSTN	14670	HOUSTON AVE	PACIFIC DR	EADINGTON AVE	E	1	AC	2	1,140	32	36,480	4/11/23	92	0	100	0	Surface Treatment - Slurry Seal	7/1/12
ROLLHL	18730	ROLLING HILLS DR	BREA BLVD	SEQUOIA AVE	E	5	AC	3	2,190	60	131,400	11/25/20	92	0	95	5	Cold Mill and Overlay	8/1/18
EDGARA	12610	EDGAR AVE	SUDENE AVE	END	E	3	AC	2	350	27	9,450	5/14/25	92	0	100	0	Surface Treatment - Slurry Seal	6/1/24
REVERE	18466	REVERE AVE	LADERA VISTA DR	W END	E	4	AC	2	250	32	8,000	5/14/25	92	0	100	0	Surface Treatment - Slurry Seal	6/8/24
MALDEN	16215	MALDEN AVE	ROSSLYNN AVE	HILL AVE	E	2	AC	2	870	32	27,840	11/22/21	92	0	100	0	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
REDOND	18420	REDONDO PL	END	DOMINGO DR	E	6	AC	2	430	32	13,760	12/30/20	92	0	100	0	Surface Treatment - Slurry Seal	5/25/20
WILLOW	21340	WILLOW AVE	ROLLING HILLS DR	BEECHWOOD AVE	E	5	AC	2	625	32	20,000	11/25/20	92	0	100	0	New Construction - Initial	1/1/80
OLDRVR	17360	OLD RIVER RD	SYCAMORE AVE	VICTORIA DR	E	5	AC	2	1,255	32	40,160	5/8/25	92	0	91	9	New Construction - Initial	1/1/80
ELRANC	12770	EL RANCHO VISTA	VIA MIRADA	CANYON DR	E	8	AAC	2	1,310	32	41,920	4/21/25	92	0	73	27	Overlay - AC Structural	5/25/19
BURNTR	10985	BURNING TREE RD	ISLAND DR	PIONEER AVE	E	8	AC	2	1,027	36	36,972	3/26/25	92	0	100	0	Surface Treatment - REAS	8/2/23
WALDO	20890	WALDO AVE	COMMONWEALTH AVE	CAROL DR	E	7	AC	2	510	26	13,260	4/20/23	92	0	73	27	New Construction - Initial	1/1/80
PAULAD	17800	PAULA DR	OLIVE AVE	END	E	1	AC	2	665	32	21,280	4/18/23	92	0	82	18	Surface Treatment - Slurry Seal	7/1/12
PORTER	18020	PORTER AVE	MAGNOLIA AVE	VINE AVE	E	1	AC	2	325	32	10,400	4/18/23	92	0	87	13	Surface Treatment - Slurry Seal	7/1/12
WESTRG	21200	WESTRIDGE KNOLL	END	VALLEY VIEW DR	E	7	AC	2	205	28	5,740	4/8/25	92	0	100	0	New Construction - Initial	1/1/80
ORANFRON	60000	ORANGETHROPE (FRONTAGE)	JEFFERSON AVE	RICHMAN AVE	E	2	AAC	2	1,912	30	38,240	12/1/23	92	0	100	0	Overlay - AC Structural	5/25/20
JENSEN	14900	JENSEN WAY	COMMONWEALTH AVE	CAROL DR	E	7	AC	2	430	32	13,760	4/27/23	92	0	93	7	New Construction - Initial	1/1/80
ELMAVE	12910	ELM AVE	POMONA AVE	END	E	3	AC	2	310	32	9,920	11/22/21	92	0	100	0	New Construction - Initial	1/1/80
ROSSLN	18980	ROSSLYNN AVE	LAWRENCE AVE	BALCOM AVE	E	3	AC	2	815	32	26,080	11/22/21	92	32	68	0	New Construction - Initial	1/1/80
HOUSTN	14680	HOUSTON AVE	EADINGTON AVE	BASQUE AVE	E	1	AC	2	1,010	32	32,320	4/11/23	92	0	75	25	Surface Treatment - Slurry Seal	7/1/12
AMERIG	8000	AMERIGE AVE	DRAKE AVE	FORD AVE	E	2	AC	2	1,309	36	47,124	12/1/21	92	0	60	40	New Construction - Initial	1/1/80
AMERIG	8025	AMERIGE AVE	POMONA AVE	LEMON ST	E	3	AC	2	610	36	21,960	12/3/21	92	0	100	0	New Construction - Initial	3/1/11
LSRDCT	15560	LAS RIENDAS CT	LAS RIENDAS DR	END	E	6	AC	2	110	32	3,520	12/1/20	92	0	100	0	Surface Treatment - Slurry Seal	5/25/20
CONEJO	11910	CONEJO LN	SUNRISE LN	CAMINO CENTROLOMA	E	8	AC	2	549	32	17,568	4/21/25	92	0	100	0	Complete Reconstruction - AC	10/1/20
CHAPMA	11650	CHAPMAN AVE	DIANA PL	BASQUE AVE	E	7	AC	2	890	32	28,480	4/1/25	92	0	100	0	Reconstruct Surface (AC)	7/1/11
ELMAVE	12880	ELM AVE	FORD AVE	HIGHLAND AVE	E	2	AC	2	340	32	10,880	2/17/22	92	0	97	3	New Construction - Initial	1/1/80
ROOSVT	18825	ROOSEVELT AVE	WEST AVE	END	E	2	AC	2	120	32	3,840	12/1/21	92	0	100	0	Surface Treatment - Slurry Seal	7/1/12
HOUSTN	14710	HOUSTON AVE	ROOSEVELT AVE	LOMBARD DR	E	2	AC	2	1,800	32	57,600	11/24/21	92	0	100	0	Surface Treatment - Slurry Seal	6/1/19
RICHMN	18540	RICHMAN AVE	ORANGETHORPE AVE	HOUSTON AVE	E	2	AC	2	1,576	32	50,432	11/24/21	92	0	100	0	New Construction - Initial	1/1/80
ROMONA	18300	RAMONA DR	ARROYO DR	BUENA VISTA DR	E	7	AC	2	1,085	22	23,870	4/2/25	92	0	100	0	Complete Reconstruction - AC	11/1/16
OLIVE	17380	OLIVE AVE	HASTINGS AVE	MEADE AVE	E	1	AC	2	950	32	30,400	4/27/23	92	0	100	0	Surface Treatment - Slurry Seal	10/1/22
TRUSLW	20355	TRUSLOW AVE	WALNUT AVE	END	E	3	AC	2	635	36	29,530	12/6/21	92	0	96	4	New Construction - Initial	1/1/80
PINCRT	17920	PINECREST CT	END	HOLLYOAK DR	E	5	AC	2	200	26	5,200	4/22/25	92	0	69	31	New Construction - Initial	1/1/80
HOLYOK	14620	HOLLYOAK DR	END	BASTANCHURY RD	E	5	AC	2	70	32	2,240	4/22/25	93	0	100	0	New Construction - Initial	1/1/80
LOMALT	15960	LOMA ALTA DR	GILBERT ST	LOMA VERDE DR	E	8	AC	2	2,020	32	64,640	4/11/25	93	0	74	26	Complete Reconstruction - AC	10/1/20
VERMNT	20660	VERMONT AVE	COMMONWEALTH AVE	CAROL DR	E	7	AC	2	450	32	14,400	4/27/23	93	0	67	33	New Construction - Initial	1/1/80
GAGEAV	13480	GAGE AVE	END	RICHMAN AVE	E	2	AC	2	300	26	7,800	11/24/21	93	0	100	0	New Construction - Initial	1/1/80
SALEM	19050	SALEM PL	END	MYSTIC AVE	E	4	AC	2	455	32	14,560	11/24/20	93	0	81	19	Surface Treatment - Slurry Seal	5/25/20
LOMAVR	15970	LOMA VERDE DR	GILBERT ST	SUNRISE LN	E	8	AC	2	1,645	32	52,640	4/11/25	93	0	23	77	Complete Reconstruction - AC	10/1/20
PORTER	18051	PORTER AVE	CITRUS AVE	END	E	5	AC	2	360	32	11,520	3/18/25	93	0	83	17	Surface Treatment - Slurry Seal	7/1/12
LLOYD	15900	LLOYD AVE	COMMONWEALTH AVE	CAROL DR	E	7	AC	2	415	32	13,280	4/27/23	93	0	100	0	New Construction - Initial	1/1/80
BUENAV	10960	BUENA VISTA DR	BEVERLY DR	ROSE DR	E	7	AC	2	816	28	22,848	12/22/21	93	0	100	0	Complete Reconstruction - AC	11/1/16
LOMBRD	15980	LOMBARD DR	WOODCREST AVE	END	E	2	AC	2	1,395	32	44,640	11/24/21	93	0	100	0	Surface Treatment - Slurry Seal	6/1/19
TEAKPL	20080	TEAK PL	END	EVERGREEN AVE	E	5	AC	2	145	32	4,640	12/4/20	93	74	26	0	Cold Mill and Overlay	8/1/18
HARGTN	14100	HARRINGTON DR	COMMONWEALTH AVE	END	E	3	AC	2	615	32	19,680	5/14/25	93	0	100	0	New Construction - Initial	1/1/80
CALALE	11080	CALLE ALEGRIA	EL RANCHO VISTA	SUNSET LN	E	8	AAC	2	776	32	24,832	4/22/25	93	0	67	33	Overlay - AC Structural	5/25/19
BURNTR	10990	BURNING TREE RD	PIONEER AVE	FRANKLIN HILLS DR	E	8	AC	2	1,791	36	64,476	3/26/25	93	0	100	0	Surface Treatment - REAS	8/2/23
TURNER	20370	TURNER AVE	COMMONWEALTH AVE	CAROL DR	E	7	AC	2	510	26	13,260	4/20/23	93	0	63	37	New Construction - Initial	1/1/80
HOUSTN	14700	HOUSTON AVE	ORCHARD AVE	BAKER AVE	E	1	AC	2	1,801	32	57,632	4/11/23	93	0	85	15	Surface Treatment - Slurry Seal	7/1/12
BEECHW	10700	BEECHWOOD AVE	SEQUIOA AVE	LIME AVE	E	5	AC	2	1,970	32	63,040	11/25/20	93	0	78	22	New Construction - Initial	1/1/80
WANDA	21030	WANDA DR	GREGORY AVE	CHAPMAN AVE	E	7	AC	2	1,125	32	36,000	4/2/25	93	0	100	0	New Construction - Initial	1/1/80
KINGPL	15060	KING PL	CHAPMAN AVE	END	E	7	AC	2	560	26	14,560	4/1/25	93	0	86	14	Reconstruct Surface (AC)	7/1/11
HILLAV	14430	HILL AVE	VINE AVE	CHERRY AVE	E	1	AC	2	900	32	28,800	4/18/23	93	0	58	42	Surface Treatment - Slurry Seal	7/1/12
MAXZIM	16500	MAXZIM AVE	END	RICHMAN AVE	E	2	AC	2	300	26	7,800	11/24/21	93	0	100	0	New Construction - Initial	1/1/80
KROEGR	15130	KROEGER AVE	DOROTHY LN	GLENWOOD AVE	E	3	AC	2	700	32	22,400	11/17/21	93	0	58	42	New Construction - Initial	1/1/80
SUNSET	19990	SUNSET LN	CALLE ALEGRIA	LOMA VERDE DR	E	8	AC	2	488	32	15,616	4/11/25	93	0	36	64	Complete Reconstruction - AC	1/1/20
CORNEL	11940	CORNELL AVE	NUTWOOD AVE	CHAPMAN AVE	E	3	AC	2	1,255	32	40,160	11/17/21	93	0	65	35	New Construction - Initial	1/1/80
ELPASO	12755	EL PASO LN	CAMINO LA VISTA	E END	E	8	AC	2	85	32	2,720	4/18/25	93	0	100	0	New Construction - Initial	3/1/11
ELIZAB	12800	ELIZABETH WAY	JACARANDA PL	CHAPMAN AVE	E	7	AC	2	505	26	13,130	4/1/25	93	0	93	7	New Construction - Initial	7/1/13
KELLOG	14980	KELLOG AVE	COMMONWEALTH AVE	CAROL DR	E	7	AC	2	510	26	13,260	4/20/23	93	0	88	12	New Construction - Initial	1/1/80
LOUISE	16050	LOUISE PL	MAGNOLIA AVE	PRITCHARD AVE	E	7	AC	2	765	32	24,480	5/9/25	93	0	100	0	Surface Treatment - Slurry Seal	6/1/24
MULBRY	16980	MULBERRY AVE	NORTHERN CITY LIMIT	SAN ANTONIO AVE	E	6	AC	2	750	32	24,000	4/22/25	93	0	80	20	New Construction - Initial	1/1/80
CANYON	11410	CANYON DR	LOMA VERDE DR	LOMA ALTA DR	E	8	AC	2	1,058	32	33,856	4/11/25	93	0	32	68	Complete Reconstruction - AC	10/1/20
COURTP	12050	COURTNEY PL	WALNUT AVE	HOUSTON AVE	E	7	AC	2	240	32	7,680	4/27/23	93	0	100	0	New Construction - Initial	1/1/80
VINEAV	20792	VINE AVE	CHERRY AVE	PORTER AVE	E	1	AC	2	465	32	14,880	4/18/23	93	0	100	0	Surface Treatment - Slurry Seal	7/1/12
WILSHR	21420	WILSHIRE AVE	RAYMOND AVE	MONTAGUE AVE	E	3	AC	2	782	36	28,152	12/6/21	93	0	100	0	Complete Reconstruction - AC	8/1/18
BERKEA	10740	BERKELEY AVE	VALLEY VIEW DR	HARBOR BLVD	E	2	AC	3	1,520	60	91,200	12/3/21	93	0	100	0	New Construction - Initial	1/1/80
WHTNGA	21230	WHITING AVE	DRAKE AVE	RICHMAN AVE	E	2	AC	2	640	32	20,480	12/20/21	93	0	100	0	New Construction - Initial	1/1/80
WILSHR	21410	WILSHIRE AVE	BALCOM AVE	RAYMOND AVE	E	3	AC	2	2,543	36	91,548	11/19/21	93	0	85	15	Cold Mill and Overlay	8/1/18
JACARA	14790	JACARANDA PL	ELIZABETH WAY	ALLEY W/DIANA PL	E	7	AC	2	436	26	11,336	4/1/25	93	0	85	15	Reconstruct Surface (AC)	7/1/11
HILLAV	14420	HILL AVE	HASTINGS AVE	MEADE AVE	E	1	AC	2	950	32	30,400	4/27/23	93	0	100	0	Surface Treatment - Slurry Seal	10/17/22
MAXWLL	16450	MAXWELL AVE	PORTER AVE	SOUTHERN CITY LIMIT	E	1	AC	2	370	32	11,840	4/27/23	93	0	100	0	Surface Treatment - Slurry Seal	10/1/22
WILSHR	21380	WILSHIRE AVE	DRAKE AVE	RICHMAN AVE	E	2	AC	2	670	32	21,440	12/2/21	93	0	100	0	Surface Treatment - Slurry Seal	8/1/18
MARGTA	16330	MARGARITA DR	END	VALENCIA MESA DR	E	7	AC	2	585	28	16,380	5/8/25	94	0	100	0	Surface Treatment - REAS	8/16/24
SNTFEA	19260	SANTA FE AVE	END	MOUNTAIN VIEW PL	E	4	AC	2	125	32	4,000	4/21/25	94	0	100	0	New Construction - Initial	1/1/80
ELIZAB	12805	ELIZABETH WAY	CHAPMAN AVE	END	E	7	AC	2	500	26	13,000	4/1/25	94	0	80	20	Reconstruct Surface (AC)	7/1/11
OLIVE	17390	OLIVE AVE	VINE AVE	LINDY PL	E	1	AC	2	975	32	31,200	4/20/23	94	0	91	9	Cold Mill and Overlay	10/1/17
LOISLN	15950	LOIS LN	FERN DR	WOODS AVE	E	2	AC	2	1,090	28	30,520	12/20/21	94	0	81	19	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
CENTRA	11610	CENTRAL AVE	HART PL	ACACIA AVE	E	3	AC	2	1,240	32	39,680	12/6/21	94	0	100	0	New Construction - Initial	1/1/80
STANFD	19770	STANFORD AVE	END	COMMONWEALTH AVE	E	3	AC	2	290	32	9,280	12/6/21	94	0	100	0	New Construction - Initial	1/1/80
MALDEN	16205	MALDEN AVE	TRUSLOW AVE	VALENCIA DR	E	2	AC	2	370	32	11,840	12/1/21	94	0	100	0	New Construction - Initial	1/1/80
ELMIRA	12705	EL MIRADOR DR	MADONNA DR	ARBOLADO DR	E	6	AC	2	975	32	31,200	11/25/20	94	0	100	0	Cold Mill and Overlay	8/1/17
VIAMIR	20730	VIA MIRADA	EL RANCHO VISTA	VIA INGRESO	E	8	AAC	2	415	32	13,280	4/21/25	94	0	89	11	Overlay - AC Structural	5/25/19
CANYON	11420	CANYON DR	LOMA ALTA DR	S END	E	8	AC	2	331	32	10,592	4/11/25	94	0	42	58	Complete Reconstruction - AC	10/1/20
HASTNG	14180	HASTINGS AVE	OAK AVE	PORTER AVE	E	1	AC	2	1,100	32	35,200	4/27/23	94	0	91	9	Surface Treatment - Slurry Seal	10/1/22
ORNFRA	17485	ORANGEFAIR AVE	HARBOR BL	LEMON ST	E	3	AC	2	1,250	38	47,500	12/15/21	94	51	32	17	New Construction - Initial	1/1/80
MONTGE	16860	MONTAGUE AVE	WILSHIRE AVE	COMMONWEALTH AVE	E	3	AC	2	700	32	22,400	12/6/21	94	0	100	0	New Construction - Initial	1/1/80
WALNTA	20940	WALNUT AVE	HIGHLAND AVE	HARBOR BLVD BRIDGE	E	2	AC	2	1,235	32	39,520	12/1/21	94	0	94	6	New Construction - Initial	1/1/80
VALEND	20485	VALENCIA DR	LAWRENCE	END	E	3	AC	2	970	60	58,200	11/29/21	94	0	100	0	New Construction - Initial	1/1/80
ROBRTA	18660	ROBERTA AVE	ROOSEVELT AVE	LOMBARD DR	E	2	AC	2	1,705	32	54,560	11/24/21	94	0	100	0	Surface Treatment - Slurry Seal	6/1/19
TWILGT	20395	TWILIGHT DR	HERMOSA RD	ROSARITA DR	E	6	AC	2	950	32	30,400	11/25/20	94	0	14	86	Cold Mill and Overlay	8/1/17
CALAVE	11050	CALAVERA PL	END	EL RANCHO VISTA	E	8	AAC	2	659	32	21,088	4/22/25	94	0	83	17	Overlay - AC Structural	5/25/19
MEADE	16510	MEADE AVE	VALENCIA DR	ASH AVE	E	1	AAC	2	593	32	18,976	4/27/23	94	0	75	25	Overlay - AC Structural	4/16/22
KELLOG	14982	KELLOG AVE	CAROL DR	SOUTH END	E	7	AC	2	320	26	8,320	4/20/23	94	0	100	0	New Construction - Initial	1/1/80
CRYSTA	12140	CRYSTAL PL	CHERRY AVE	END	E	1	AC	2	160	32	5,120	4/18/23	94	0	79	21	Surface Treatment - Slurry Seal	7/1/12
BAKER	10420	BAKER AVE	EADINGTON AVE	BASQUE AVE	E	1	AC	2	962	32	30,784	4/11/23	94	0	100	0	Surface Treatment - Slurry Seal	7/1/12
FORDAV	13333	FORD AVE	CHAPMAN AVE	WILSHIRE AVE	E	2	AC	2	490	32	15,680	2/17/22	94	0	71	29	New Construction - Initial	3/5/11
ARROYP	10040	ARROYO PL	FERN DR	ARROYO DR	E	7	AC	2	480	26	12,480	12/23/21	94	0	100	0	Complete Reconstruction - AC	7/1/17
JANET	14820	JANET PL	REVERE AVE	END	E	3	AC	2	450	27	12,150	12/6/21	94	0	100	0	New Construction - Initial	1/1/80
HIGLND	14390	HIGHLAND AVE	WILSHIRE AVE	COMMONWEALTH AVE	E	2	AC	3	688	34	23,392	12/3/21	94	0	100	0	New Construction - Initial	1/1/80
ROSSLN	18970	ROSSLYNN AVE	E END	W END NEAR POMONA	E	3	AC	2	641	32	20,512	11/22/21	94	0	100	0	New Construction - Initial	1/1/80
YUMAWY	21680	YUMA WAY	END	LAGUNA RD	E	6	AC	2	795	28	22,260	1/6/21	94	0	100	0	Surface Treatment - Slurry Seal	5/25/20
PORTER	18010	PORTER AVE	HASTINGS AVE	MEADE AVE	E	1	AC	2	960	32	30,720	4/27/23	94	0	93	7	Surface Treatment - Slurry Seal	10/1/22
ELMAVE	12885	ELM AVE	HIGHLAND AVE	TAMARACK DR	E	2	AC	2	360	32	11,520	11/22/21	94	0	86	14	New Construction - Initial	1/1/80
CANYON	11400	CANYON DR	ROSECRANS AVE	SUNSET LN	E	8	AAC	2	1,065	32	34,080	4/22/25	94	0	57	43	Overlay - AC Structural	5/25/19
UNION	20450	UNION AVE	VICTORIA DR	END	E	3	AAC	2	260	26	6,760	12/6/21	94	0	86	14	Overlay - AC Structural	11/2/21
BROOKD	10910	BROOKDALE PL	CORNELL AVE	END	E	3	AC	2	482	32	15,424	11/17/21	94	0	87	13	New Construction - Initial	1/1/80
DIANA	12400	DIANA PL	JACARANDA PL	END	E	7	AC	2	960	26	24,960	4/23/25	94	0	32	68	Reconstruct Surface (AC)	7/1/11
HALLAV	14005	HALL AVE	RIVERSIDE DR	S END	E	3	AC	2	420	32	13,440	12/6/21	94	0	100	0	New Construction - Initial	1/1/80
WESTAV	21175	WEST AVE	EUCLID	ALLEY W/ ROOSEVELT	E	2	AC	2	145	32	4,946	12/1/21	94	0	88	12	Surface Treatment - Slurry Seal	7/1/12
LINCOL	15790	LINCOLN AVE	MELODY LN	GLENWOOD AVE	E	3	AC	2	1,297	32	41,504	11/17/21	94	0	88	12	New Construction - Initial	1/1/80
UNION	20425	UNION AVE	HARBOR BL	POMONA AVE	E	3	AC	2	705	32	22,560	5/8/25	94	0	59	41	Surface Treatment - Slurry Seal	6/1/24
SERRNO	19400	SERRANO PL	AVANIDA SAN LORENZO	ROSECRANS AVE	E	8	AAC	2	810	32	25,920	4/11/25	94	0	88	12	Overlay - AC Structural	4/1/23
CEDAR	11560	CEDAR AVE	WALNUT AVE	VALENCIA DR	E	7	AC	2	475	32	15,200	4/27/23	94	0	100	0	New Construction - Initial	1/1/80
POMONA	17970	POMONA AVE	UNION AVE	CHAPMAN AVE	E	3	AC	2	1,250	36	45,000	12/3/21	94	0	100	0	New Construction - Initial	1/1/80
RICHMN	18525	RICHMAN AVE	WALNUT AVE	ASH AVE	E	2	AC	2	1,180	32	37,760	11/29/21	94	0	100	0	Mill, Overlay w/Fabric (1.5 In)	7/1/12
TAMRCK	20050	TAMARACK DR	END	ROSLYNN AVE	E	2	AC	2	795	26	20,670	11/22/21	94	0	89	11	Complete Reconstruction - AC	6/1/18
TRUSLW	20340	TRUSLOW AVE	END	BALCOM AVE	E	3	AC	2	1,210	32	38,720	11/22/21	94	0	100	0	Cold Mill and Overlay	1/1/17
RIVRSD	18620	RIVERSIDE DR	RIEDEL AVE	RAYMOND AVE	E	3	AC	2	1,175	36	42,300	11/17/21	94	0	100	0	New Construction - Initial	1/1/80
ALBERT	6060	ALBERTA PL	END	GREGORY AVE	E	7	AC	2	400	26	10,400	4/2/25	94	0	90	10	New Construction - Initial	1/1/80
WINETA	21480	WINETTA PL	END	GREGORY AVE	E	7	AC	2	305	26	7,930	4/2/25	94	0	90	10	New Construction - Initial	1/1/80
PATRSN	17780	PATTERSON WAY	LAWRENCE AVE	END	E	3	AC	2	1,325	20	24,210	11/29/21	94	0	89	11	Cold Mill and Overlay	1/1/17
AMERIG	8035	AMERIGE AVE	CONCORD AVE	LILLIE AVE	E	4	AC	2	255	32	8,160	5/14/25	94	0	100	0	Surface Treatment - Slurry Seal	6/1/24
CALMIR	11110	CALLE MIRANDA	END	CALAVERA PL	E	8	AAC	2	233	32	7,456	4/22/25	94	0	100	0	Overlay - AC Structural	5/25/19
HARGTN	14095	HARRINGTON DR	CHAPMAN AVE	S END	E	3	AC	2	960	32	30,720	12/6/21	94	0	100	0	New Construction - Initial	1/1/80
SUNHLS	19890	SUNNY HILLS RD	LAKEVIEW DR	E END	E	6	AC	2	380	32	12,160	5/9/25	95	0	0	100	Surface Treatment - Cape Seal	12/8/24
THOPSN	20190	THOMPSON AVE	END	LOUISE PL	E	7	AC	2	210	32	6,720	5/9/25	95	0	84	16	Surface Treatment - Slurry Seal	6/1/24
BERNAR	10770	BERNARD DR	ROSARITA DR	FIRETHORNE AVE	E	6	AC	2	1,109	32	35,488	4/22/25	95	0	100	0	Surface Treatment - Slurry Seal	5/25/20
BALCOM	10510	BALCOM AVE	VALENCIA DR	ROSSLYNN AVE	E	3	AC	2	943	32	30,176	11/22/21	95	0	96	4	New Construction - Initial	1/1/80
NEWLLA	17060	NEWELL AVE	VALENCIA DR	ELM AVE	E	3	AC	2	675	32	21,600	11/22/21	95	0	93	7	New Construction - Initial	1/1/80
BALCOM	10490	BALCOM AVE	COMMONWEALTH AVE	SANTA FE R.R. / END	E	3	AC	2	618	32	19,776	11/19/21	95	0	93	7	New Construction - Initial	1/1/80
LINWOD	15880	LINWOOD PL	COMMONWEALTH AVE	WALNUT AVE	E	3	AC	2	690	20	13,800	11/19/21	95	0	90	10	New Construction - Initial	1/1/80
RIVRSD	18615	RIVERSIDE DR	FERNDALE AVE	RIEDEL AVE	E	3	AC	2	860	36	30,960	11/17/21	95	0	94	6	New Construction - Initial	1/1/80
RAYMOA	18380	RAYMOND AVE	SMOKEWOOD AVE	S END	E	5	AC	2	40	32	1,280	6/1/18	95	0	100	0	New Construction - Initial	1/1/80
VALEND	20480	VALENCIA DR	LEMON AVE	LAWRENCE	E	3	AC	2	615	32	19,680	11/29/21	95	0	100	0	New Construction - Initial	1/1/80
ASHAVE	10155	ASH AVE	MALDEN AVE	HARBOR BLVD	E	2	AC	2	613	32	19,616	11/22/21	95	0	99	1	Cold Mill and Overlay	6/1/18
ELMAVE	12930	ELM AVE	LAWRENCE AVE	BALCOM AVE	E	3	AC	2	805	32	25,760	11/22/21	95	0	100	0	New Construction - Initial	1/1/80
SUNSET	19992	SUNSET LN	LOMA VERDE DR	CANYON DR	E	8	AC	2	1,150	32	38,300	4/11/25	95	0	41	59	Complete Reconstruction - AC	10/1/20
CHAPFRONT	70000	CHAPMAN AVE (FRONTAGE)	CLARKE AVE	COMMONWEALTH AVE	E	4	AC	2	575	30	17,250	12/7/23	95	0	100	0	New Construction - AC	1/1/80
REVERE	18464	REVERE AVE	ANNIN AVE	HARRINGTON DR	E	3	AC	2	525	32	48,800	12/6/21	95	0	100	0	New Construction - Initial	1/1/80
WHTNGA	21250	WHITING AVE	POMONA AVE	LEMON ST	E	3	AC	2	615	28	17,220	12/3/21	95	0	100	0	New Construction - Initial	1/1/80
TRUSLW	20320	TRUSLOW AVE	RICHMAN AVE	HIGHLAND AVE	E	2	AC	2	1,387	32	44,384	12/1/21	95	0	100	0	New Construction - Initial	1/1/80
ASPENC	10240	ASPEN CIR	END	LIVE OAK AVE	E	5	AC	2	220	32	7,040	11/25/20	95	0	9	91	Complete Reconstruction - AC	6/1/18
PRNCTN	18114	PRINCETON CIR	PRINCETON CIR	CHAPMAN AVE	E	3	AC	2	240	32	7,680	5/8/25	95	0	100	0	New Construction - Initial	1/1/80
VIAING	20720	VIA INGRESO	GILBERT ST	CALLE ALEGRIA	E	8	AAC	2	720	32	23,040	4/22/25	95	0	64	36	Overlay - AC Structural	7/4/19
MARTHA	16410	MARTHA PL	END	GREGORY AVE	E	7	AC	2	500	26	13,000	4/2/25	95	0	100	0	New Construction - Initial	1/1/80
OAKAVE	17260	OAK AVE	BROOKHURST AVE	LOCUST DR	E	1	AC	2	337	32	10,784	3/25/25	95	0	100	0	Complete Reconstruction - AC	6/1/18
BASQUE	10610	BASQUE AVE	VALENCIA DR	OAK AVE	E	1	AC	2	860	32	27,520	3/19/25	95	0	100	0	Complete Reconstruction - AC	6/1/18
ASHAVE	10070	ASH AVE	DALE ST	MEADE AVE	E	1	AAC	2	762	32	24,384	4/27/23	95	0	100	0	Overlay - AC Structural	4/16/22
ASHAVE	10075	ASH AVE	MEADE AVE	END	E	1	AAC	2	402	32	12,864	4/27/23	95	0	100	0	Surface Reconstruction - AC	4/16/22

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
FLOWER	13250	FLOWER AVE	DALE ST	MEADE AVE	E	1	AC	2	1,065	32	34,080	4/27/23	95	0	100	0	Surface Treatment - Slurry Seal	10/1/22
FRANKN	13375	FRANKLIN AVE	MEADE AVE	END	E	1	AAC	2	400	32	12,800	4/27/23	95	0	100	0	Overlay - AC Structural	4/16/22
HASTNG	14170	HASTINGS AVE	WEST AVE	ASH AVE	E	1	AAC	2	530	32	16,960	4/27/23	95	0	100	0	Surface Reconstruction - AC	4/16/22
WESTAV	21110	WEST AVE	HASTINGS AVE	MEADE	E	1	AAC	2	580	32	18,560	4/27/23	95	0	100	0	Overlay - AC Structural	4/16/22
WESTAV	21115	WEST AVE	MEADE	END	E	1	AAC	2	435	32	13,920	4/27/23	95	0	100	0	Surface Reconstruction - AC	4/16/22
OLIVE	17385	OLIVE AVE	MAGNOLIA AVE	VINE AVE	E	1	AC	2	590	32	18,880	4/20/23	95	0	100	0	Cold Mill and Overlay	10/1/17
TURNER	20372	TURNER AVE	CAROL DR	CUL-DE-SAC (S)	E	7	AC	2	470	26	13,420	4/20/23	95	0	100	0	New Construction - Initial	1/1/80
VINEAV	20785	VINE AVE	OAK AVE	FLOWER	E	1	AC	2	250	32	8,000	4/20/23	95	0	100	0	Surface Treatment - Slurry Seal	7/1/12
WALDO	20892	WALDO AVE	CAROL DR	SOUTH END	E	7	AC	2	160	26	4,160	4/20/23	95	0	100	0	New Construction - Initial	1/1/80
VINEAV	20795	VINE AVE	ORANGETHORPE	END	E	1	AAC	2	230	32	7,360	4/17/23	95	0	100	0	Overlay - AC Structural	4/16/22
ROSEDR	18890	ROSE DR	BUENA VISTA DR	BUENA VISTA DR	E	7	AC	2	950	32	30,400	12/22/21	95	0	100	0	Complete Reconstruction - AC	11/1/16
LELAND	15700	LELAND DR	WOODS AVE	DRAKE AVE	E	2	AC	2	735	20	14,700	12/20/21	95	0	100	0	New Construction - Initial	1/1/80
GROVE	13820	GROVE PL	RAYMOND AVE	HALL AVE	E	3	AC	2	630	32	20,160	12/6/21	95	0	100	0	New Construction - Initial	1/1/80
HARTPL	14105	HART PL	VICTORIA DR	CHAPMAN AVE	E	3	AC	2	734	32	23,488	12/6/21	95	0	100	0	New Construction - Initial	1/1/80
HARTPL	14110	HART PL	END	WILSHIRE AVE	E	3	AC	2	450	27	12,150	12/6/21	95	0	100	0	New Construction - Initial	1/1/80
NUTWOA	17210	NUTWOOD AVE	VICTORIA DR	ACACIA AVE	E	3	AC	2	700	32	22,400	12/6/21	95	0	100	0	New Construction - Initial	1/1/80
HIGLND	14383	HIGHLAND AVE	UNION AVE	CHAPMAN AVE	E	2	AC	2	1,170	28	32,760	12/3/21	95	0	100	0	New Construction - Initial	1/1/80
HIGLND	14386	HIGHLAND AVE	CHAPMAN AVE	WILSHIRE AVE	E	2	AC	2	490	34	16,660	12/3/21	95	0	100	0	New Construction - Initial	1/1/80
POMONA	17975	POMONA AVE	CHAPMAN AVE	COMMONWEALTH AVE	E	3	AC	2	1,252	52	65,104	12/3/21	95	0	100	0	New Construction - Initial	1/1/80
POMONA	17980	POMONA AVE	COMMONWEALTH AVE	END	E	3	AC	2	440	32	14,080	12/3/21	95	0	100	0	New Construction - Initial	1/1/80
SNTFEA	19220	SANTA FE AVE	HIGHLAND AVE	HARBOR BLVD	E	2	AC	2	1,275	32	40,800	12/3/21	95	0	100	0	New Construction - Initial	1/1/80
WHTNGA	21248	WHITING AVE	W END	POMONA AVE	E	3	AC	2	170	32	5,440	12/3/21	95	0	100	0	New Construction - Initial	1/1/80
CHESTN	11720	CHESTNUT PL	COMMONWEALTH AVE	END	E	2	AC	2	535	32	17,120	12/2/21	95	0	100	0	Complete Reconstruction - AC	10/1/20
WILSHR	21375	WILSHIRE AVE	WOODS AVE	DRAKE AVE	E	2	AC	2	708	32	22,656	12/2/21	95	0	100	0	Cold Mill and Overlay	8/1/18
WILSHR	21385	WILSHIRE AVE	RICHMAN AVE	HIGHLAND AVE	E	2	AC	2	1,320	32	42,240	12/2/21	95	0	100	0	Cold Mill and Overlay	8/1/18
WILSHR	21390	WILSHIRE AVE	HIGHLAND AVE	MALDEN AVE	E	2	AC	2	660	38	25,080	12/2/21	95	0	100	0	Cold Mill and Overlay	8/1/18
WILSHR	21393	WILSHIRE AVE	MALDEN AVE	HARBOR BL	E	2	AC	2	625	48	30,000	12/2/21	95	0	100	0	Cold Mill and Overlay	8/1/18
AMERIG	8010	AMERIGE AVE	FORD AVE	HARBOR BLVD	E	2	AC	2	1,941	36	69,876	12/1/21	95	0	100	0	Surface Treatment - REAS	7/30/25
BALCOM	10505	BALCOM AVE	PATTERSON WY	VALENCIA DR	E	3	AC	2	220	32	7,040	11/29/21	95	0	100	0	Cold Mill and Overlay	1/1/17
WOODSA	21583	WOODS AVE	ASH AVE	ROSSLYNN AVE	E	2	AC	2	709	32	22,688	11/29/21	95	0	100	0	New Construction - Initial	1/1/80
BAKER	10450	BAKER AVE	EUCLID ST	LOMBARD DR	E	2	AAC	2	2,051	32	65,632	11/24/21	95	0	100	0	Overlay - AC Structural	6/1/19
ASHAVE	10150	ASH AVE	HIGHLAND AVE	MALDEN AVE	E	2	AC	2	618	32	19,776	11/22/21	95	0	100	0	Complete Reconstruction - AC	6/1/18
ASHAVE	10160	ASH AVE	HARBOR BLVD	END	E	3	AC	2	971	36	34,956	11/22/21	95	0	100	0	New Construction - Initial	1/1/80
ASHAVE	10170	ASH AVE	LEMON ST	LAWRENCE AVE	E	3	AC	2	600	30	18,000	11/22/21	95	0	100	0	New Construction - Initial	1/1/80
BALCOM	10500	BALCOM AVE	TRUSLOW AVE	PATTERSON WAY	E	3	AC	2	172	32	5,504	11/22/21	95	0	100	0	Cold Mill and Overlay	1/1/17
ELMAVE	12890	ELM AVE	MALDEN AVE	HARBOR BLVD	E	2	AC	2	600	32	19,200	11/22/21	95	0	100	0	Cold Mill and Overlay	6/1/18
LWRNCE	15665	LAWRENCE AVE	COMMONWEALTH AVE	SANTA FE AVE	E	3	AC	2	360	32	11,520	11/22/21	95	0	100	0	Complete Reconstruction - AC	6/1/18
LWRNCE	15670	LAWRENCE AVE	VALENCIA DR	ROSSLYNN AVE	E	3	AC	2	1,015	32	32,480	11/22/21	95	0	100	0	Complete Reconstruction - AC	11/1/15
LWRNCE	15675	LAWRENCE AVE	WALNUT AVE	VALENCIA DR	E	3	AC	2	515	32	16,480	11/22/21	95	0	100	0	Cold Mill and Overlay	1/1/17
MALDEN	16210	MALDEN AVE	VALENCIA DR	ROSSLYNN AVE	E	2	AC	2	960	32	30,720	11/22/21	95	0	100	0	Surface Treatment - Slurry Seal	6/1/18
NEWKRK	17080	NEWKIRK AVE	VALENCIA DR	ELM AVE	E	3	AC	2	675	32	21,600	11/22/21	95	0	100	0	New Construction - Initial	1/1/80
ROSSLN	18960	ROSSLYNN AVE	HIGHLAND AVE	HARBOR BLVD	E	2	AC	2	1,265	32	40,480	11/22/21	95	0	100	0	Cold Mill and Overlay	6/1/18
TRUSLW	20350	TRUSLOW AVE	BALCOM AVE	END	E	3	AC	2	460	26	11,960	11/22/21	95	0	100	0	Cold Mill and Overlay	1/1/17
WALNTA	21015	WALNUT AVE	ALLEY W/O LAWRENCE AVE	ALLEY E/O LAWRENCE AVE	E	3	AC	2	1,180	23	27,140	11/22/21	95	0	100	0	Cold Mill and Overlay	1/1/17
WILSHR	21400	WILSHIRE AVE	LEMON ST	LAWRENCE AVE	E	3	AC	2	615	36	22,140	11/19/21	95	0	100	0	Cold Mill and Overlay	8/1/18
COLLEG	11865	COLLEGE PL	CORNELL AVE	STANFORD AVE	E	3	AC	2	230	32	7,360	11/17/21	95	0	100	0	New Construction - Initial	1/1/80
FRNDLE	13180	FERNDALE AVE	DOROTHY LN	RIVERSIDE DR	E	3	AC	2	900	32	28,800	11/17/21	95	0	100	0	New Construction - Initial	1/1/80
GLNWOD	13660	GLENWOOD AVE	RAYMOND AVE	RIEDEL AVE	E	3	AC	2	1,050	32	33,600	11/17/21	95	0	100	0	New Construction - Initial	1/1/80
LNDNDL	15860	LINDENDALE AVE	DOROTHY LN	RIVERSIDE DR	E	3	AC	2	589	32	8,960	11/17/21	95	0	100	0	New Construction - Initial	1/1/80
UNION	20440	UNION AVE	RAYMOND AVE	RIEDEL AVE	E	3	AC	2	1,045	32	33,440	11/17/21	95	0	100	0	New Construction - Initial	1/1/80
SEQUOA	19395	SEQUOIA AVE	ROLLING HILLS DR	SANDALWOOD AVE	E	5	AC	2	1,264	32	40,448	11/25/20	95	0	100	0	New Construction - Initial	1/1/80
MARLEN	16310	MARELEN DR	ROBIN WAY	SUNNYCREST DR	E	7	AC	2	290	32	9,280	2/3/20	95	0	100	0	New Construction - Initial	1/1/80
GRNACD	13720	GREEN ACRE DR	W END	HIGHLAND AVE	E	7	AC	2	980	32	31,360	5/8/25	95	0	32	68	Surface Treatment - REAS	8/16/24
MIMOSA	16760	MIMOSA PL	LIVE OAK AVE	END	E	5	AC	2	130	32	4,160	6/5/26	95	0	100	0	Surface Treatment - REAS	8/28/25
HARTFD	14160	HARTFORD AVE	BASTANCHURY RD	SHERWOOD AVE	E	4	AC	2	1,155	32	36,960	6/5/26	95	0	100	0	Surface Treatment - REAS	8/30/25
MARION	16370	MARION BLVD	CLAIRE AVE	MELVILLE DR	E	5	AC	2	1,010	26	26,260	5/9/25	95	75	25	0	Surface Treatment - Slurry Seal	6/1/24
AVESLO	10350	AVENIDA SAN LORENZO	SERRANO PL	CAMINO REY	E	8	AAC	2	872	32	27,904	4/11/25	95	0	100	0	Overlay - AC Structural	4/1/23
MOONBM	16900	MOONBEAM PL	LOMA ALTA DR	END	E	8	AC	2	160	32	5,120	4/11/25	95	0	100	0	Complete Reconstruction - AC	10/1/20
HIGLND	14413	HIGHLAND AVE	ORANGETHORPE AVE	BAKER AVE	E	2	AC	4	900	60	54,000	12/15/21	95	0	84	16	Surface Treatment - Slurry Seal	3/1/23
ARBOLA	9060	ARBOLADO DR	TWILIGHT DR	MADONNA DR	E	6	AAC	2	930	32	29,760	11/25/20	95	0	100	0	Overlay - AC Structural	8/1/17
VINEAV	20780	VINE AVE	END	LOUISE PL	E	7	AC	2	240	32	7,680	5/9/25	95	0	100	0	Surface Treatment - Slurry Seal	6/1/24
CHAPMA	11640	CHAPMAN AVE	END (CHAPMAN ALLEY)	DIANA PL	E	7	AC	2	1,660	32	53,120	4/23/25	95	0	100	0	Reconstruct Surface (AC)	7/1/11
ELMIRA	12700	EL MIRADOR DR	TWILIGHT DR	MADONNA DR	E	6	AAC	2	943	32	30,176	11/25/20	95	0	16	84	Overlay - AC Structural	8/1/17
HIGLND	14350	HIGHLAND AVE	BASTANCHURY RD	GREEN ACRE DR	E	7	AC	2	245	32	7,840	5/8/25	95	0	100	0	Surface Treatment - REAS	8/16/24
GRNACR	13740	GREEN ACRE RD	GREEN ACRE DR	RICHMAN KNOLL	E	7	AC	2	420	32	13,440	5/8/25	96	0	100	0	Surface Treatment - REAS	8/9/24
JACARA	14800	JACARANDA PL	ORCHARD AVE	MARIE AVE	E	7	AC	2	850	32	27,200	12/23/21	96	0	0	100	New Construction - Initial	1/1/80
SUNRSE	19960	SUNRISE LN	SUNSET LN	CONEJO LN	E	8	AC	2	615	32	19,680	4/11/25	96	0	71	29	Complete Reconstruction - AC	10/1/20
SUNSET	19995	SUNSET LN	LOMA ALTA DR	S END	E	8	AC	2	150	32	4,800	4/11/25	96	0	100	0	Complete Reconstruction - AC	10/1/20
BEDFOR	10670	BEDFORD DR	DEERPARK DR	SHERWOOD AVE	E	4	AC	2	1,254	32	40,128	6/5/26	96	0	100	0	Surface Treatment - REAS	8/28/25
VIACAL	20700	VIA CALIENTE	AVENIDA SAN LORENZO	YERMO PL	E	8	AAC	2	715	32	22,880	4/11/25	96	0	100	0	Overlay - AC Structural	4/1/23
SUMMIT	19850	SUMMIT CIR	LOMA ALTA DR	END	E	8	AC	2	195	32	6,240	4/11/25	96	0	100	0	Complete Reconstruction - AC	10/1/20
CORONA	11956	CORONADO DR	N END	LAS PALMAS DR	E	6	AC	2	550	32	17,600	5/9/25	96	0	100	0	Surface Treatment - Cape Seal	12/1/24

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
VERDUGO	9950	VERDUGO PL	VIA INGRESO	END	E	8	AAC	2	153	32	4,896	4/22/25	96	0	100	0	Overlay - AC Structural	7/4/19
LSLNSL	15485	LAS LANAS LN	LOMA ALTA DR	S END	E	8	AC	2	736	32	23,552	4/11/25	96	0	90	10	Complete Reconstruction - AC	10/1/20
HAMELL	14020	HAMELL RD	END	HERMOSA DR	E	6	AC	2	320	25	8,000	5/8/25	96	0	0	100	Surface Treatment - Slurry Seal	6/1/24
WESLEY	21100	WESLEY AVE	BUENA VISTA DR	MALVERN AVE	E	7	AC	2	610	28	17,080	12/23/21	96	0	100	0	Complete Reconstruction - AC	11/1/16
THOPSN	20180	THOMPSON AVE	COMMONWEALTH AVE	END	E	7	AC	2	550	32	17,600	5/9/25	96	0	100	0	Surface Treatment - Slurry Seal	6/5/24
GRNACD	13730	GREEN ACRE DR	HIGHLAND AVE	E END	E	7	AC	2	693	32	22,176	5/8/25	96	0	100	0	Surface Treatment - Slurry Seal	8/16/24
GRNDVW	13700	GRANDVIEW AVE	FERN DR	WOODS AVE	E	2	AC	2	1,420	32	45,440	12/20/21	96	96	4	0	New Construction - Initial	1/1/80
ASHFOR	10220	ASHFORD PL	REVERE AVE	END	E	3	AC	2	196	26	5,096	12/6/21	97	0	100	0	New Construction - Initial	1/1/80
CALAVE	11060	CALAVERA PL	SERRANO PL	VIA CALIENTE	E	8	AAC	2	397	32	12,704	4/11/25	97	0	88	12	Overlay - AC Structural	4/1/23
VALLEY	20560	VALLEY LN	END	LOMA ALTA DR	E	8	AC	2	490	32	15,680	4/11/25	97	0	88	12	Complete Reconstruction - AC	10/1/20
SUNSET	19980	SUNSET LN	CAMINO CENTROLOMA	CALLE ALEGRIA	E	8	AC	2	1,720	32	55,040	4/11/25	97	0	78	22	Complete Reconstruction - AC	1/1/20
CHAPMA	11660	CHAPMAN AVE	MICHAEL AVE	EUCLID ST	E	7	AAC	2	1,685	32	53,920	8/29/23	97	0	100	0	Overlay - AC Structural	5/25/20
VIAMIR	20740	VIA MIRADA	GILBERT ST	LOMA ALTA DR	E	8	AC	2	975	32	31,200	4/11/25	97	0	87	13	Complete Reconstruction - AC	10/1/20
LVEOAK	15985	LIVE OAK AVE	ROLLING HILLS DR	END	E	5	AC	2	690	32	22,080	6/5/26	97	0	100	0	Surface Treatment - REAS	8/28/25
BRAEBU	10850	BRAEBURN AVE	DEERPARK DR	SHERWOOD AVE	E	4	AC	2	755	32	24,160	6/5/26	97	0	100	0	Surface Treatment - REAS	8/28/25
SUDENE	19830	SUDENE AVE	JANET PL	HARRINGTON DR	E	3	AC	2	1,290	32	41,280	5/14/25	97	0	100	0	Surface Treatment - Slurry Seal	6/1/24
HIGLND	50080	HIGHLAND AVE	ROSSLYNN AVE	HILL AVE	E	7	AC	3	995	45	44,775	12/15/21	97	0	43	57	New Construction - Initial	1/1/80
SUNRSE	19970	SUNRISE LN	CONEJO LN	LAS LANAS LN	E	8	AC	2	531	32	22,560	4/11/25	97	0	100	0	Complete Reconstruction - AC	10/1/20
ENTPRS	12980	ENTERPRISE WAY	KIMBERLY AVE	END	E	3	AC	2	400	38	15,200	12/23/21	97	0	64	36	New Construction - Initial	1/1/80
WRENWY	21600	WREN WAY	LEGGET LN	END	E	8	AC	2	170	32	5,440	4/23/25	98	0	100	0	New Construction - Initial	1/1/80
HIGLND	14396	HIGHLAND AVE	PCC 140' N/ WALNUT AVE	WALNUT AVE	E	7	PCC	2	141	40	5,640	2/17/22	98	0	100	0	New Construction - Initial	1/1/80
HIGLND	50070	HIGHLAND AVE	VALENCIA DR	ROSSLYNN AVE	E	7	AC	3	855	36	38,650	12/15/21	98	0	59	41	New Construction - Initial	1/1/80
YERMO	21640	YERMO PL	SERRANO PL	VIA CALIENTE	E	8	AAC	2	435	32	13,920	4/11/25	98	0	70	30	Overlay - AC Structural	4/1/23
PICDLY	17850	PICADILLY WAY	CDS	PVMT CHNGE 250' S/ END	E	1	AC	2	252	38	11,520	3/25/25	98	99	1	0	Surface Treatment - Slurry Seal	10/5/22
CARRIA	11500	CARRIAGE PL	END	TERRAZA PL	E	6	AC	2	195	32	6,240	12/3/20	98	0	100	0	Surface Treatment - Slurry Seal	5/25/20
ELINOR	12790	ELINOR WAY	ROSARITA DR	MADONNA DR	E	6	AC	2	1,360	32	43,520	11/25/20	98	0	36	64	Complete Reconstruction - AC	8/1/17
PRTCRD	18190	PRITCHARD AVE	END	VALENCIA DR	E	7	AC	2	620	32	19,840	5/9/25	99	0	100	0	Surface Treatment - Slurry Seal	6/1/24
MAPLE	16260	MAPLE AVE	NORTHERN CITY LIMIT	LAUREL AVE	E	5	AC	2	1,530	32	48,960	4/22/25	99	0	100	0	Complete Reconstruction - AC	5/25/20
ORANGE	50006	ORANGE AVE	CHAPMAN AVE	END	E		AAC	0	210	32	6,720	8/29/23	99	0	100	0	New Construction - Initial	1/1/10
LRKELN	15420	LARK ELLEN DR	PONDEROSA AVE	LAUREL AVE	E	5	AC	2	365	32	11,680	12/4/20	99	0	61	39	Complete Reconstruction - AC	6/1/18
MESITA	16640	MESITA PL	ARBOLADO DR	END	E	6	AAC	2	185	32	5,920	12/1/20	99	0	100	0	Overlay - AC Structural	8/1/17
MAPLE	16270	MAPLE AVE	LAUREL AVE	ROLLING HILLS DR	E	5	AC	2	550	32	17,600	4/22/25	99	0	69	31	Complete Reconstruction - AC	5/25/20
HIGLND	14410	HIGHLAND AVE	HILL AVE	ORANGETHORPE AVE	E	2	AC	3	495	60	29,700	12/15/21	99	0	100	0	New Construction - Initial	1/1/80
BROOKD	10915	BROOKDALE PL	VICTORIA DR	E END	E	3	AAC	2	150	32	4,800	12/6/21	99	0	0	100	Overlay - AC Structural	12/2/21
DEERPK	12280	DEERPARK DR	AMHERST AVE	END	E	4	AC	2	1,283	32	41,056	6/5/26	99	0	100	0	Surface Treatment - REAS	8/28/25
AMHERS	8060	AMHERST AVE	DEERPARK DR	HARTFORD AVE	E	4	AC	2	832	32	26,624	6/5/26	99	0	100	0	Surface Treatment - REAS	8/28/25
PALMST	17665	PALM ST	IMPERIAL HWY	XIMENO DR	E	6	AC	2	245	36	8,820	4/18/25	99	0	100	0	New Construction - Initial	1/1/80
PICDLY	17851	PICADILLY WAY	PVMT CHNGE 250' S/ END	SOUTHERN CITY LIMIT	E	1	AC	2	310	35	10,735	3/25/25	99	0	100	0	Surface Treatment - Slurry Seal	10/5/22
EVRGRN	13010	EVERGREEN AVE	BREA BLVD	SEQUOIA AVE	E	5	AC	2	1,560	32	49,920	12/4/20	99	0	100	0	Cold Mill and Overlay	8/1/18
PRTCRD	18180	PRITCHARD AVE	COMMONWEALTH AVE	END	E	7	AC	2	540	32	17,280	5/9/25	99	0	100	0	Surface Treatment - Slurry Seal	6/1/24
DELORO	12320	DEL ORO LN	END	ARBOLADO DR	E	6	AAC	2	300	32	9,600	12/1/20	99	0	100	0	Overlay - AC Structural	8/1/17
PRNTNE	18150	PRINCETON CIR EAST	PRINCETON AVE	PRINCETON AVE	E	3	AC	2	1,430	26	37,180	5/8/25	99	0	100	0	New Construction - Initial	1/1/80
SARAH	19380	SARAH PL	END	ARBOLADO DR	E	6	AAC	2	160	32	5,120	11/25/20	99	0	100	0	Overlay - AC Structural	8/1/17
CENTRA	11600	CENTRAL AVE	RAYMOND AVE	END	E	3	AC	2	440	32	14,080	5/8/25	99	0	100	0	Surface Treatment - REAS	11/1/24
JENSEN	14910	JENSEN WAY	END	VALENCIA DR	E	7	AC	2	510	32	16,320	5/9/25	100	0	100	0	Surface Treatment - Slurry Seal	6/1/24
ALTIVO	7020	ALTIVO PL	END	ARBOLADO DR	E	6	AAC	2	490	32	15,680	12/1/20	100	0	100	0	Overlay - AC Structural	8/1/17
ARBOLA	9065	ARBOLADO DR	MADONNA DR	SARAH PL	E	6	AC	2	360	32	11,520	11/25/20	100	0	100	0	Complete Reconstruction - AC	8/1/17
ARBOLA	9070	ARBOLADO DR	SARAH PL	EL MIRADOR DR	E	6	AC	2	1,080	32	34,560	11/25/20	100	0	100	0	Complete Reconstruction - AC	8/1/17
ARBOLA	9080	ARBOLADO DR	EL MIRADOR DR	MADONNA DR	E	6	AC	2	1,730	32	55,360	11/25/20	100	0	100	0	Complete Reconstruction - AC	8/1/17
MADNNA	16155	MADONNA DR	HERMOSA DR	ARBOLADO DR	E	6	AC	2	285	32	9,120	11/25/20	100	0	100	0	Cold Mill and Overlay	8/1/17
MADNNA	16160	MADONNA DR	ARBOLADO DR	END	E	6	AC	2	1,985	32	63,520	11/25/20	100	0	100	0	Complete Reconstruction - AC	8/1/17
ROSRTA	18870	ROSARITA DR	MADONNA DR	ARBOLADO DR	E	6	AC	2	845	32	27,040	11/25/20	100	0	100	0	Complete Reconstruction - AC	8/1/17
ROSRTA	18873	ROSARITA DR	TWILIGHT DR	MADONNA DR	E	6	AC	2	840	32	26,880	11/25/20	100	0	100	0	Surface Treatment - Slurry Seal	8/1/17
ROSRTA	18877	ROSARITA DR	END	TWILIGHT DR	E	6	AC	2	1,195	32	38,240	11/25/20	100	0	100	0	Complete Reconstruction - AC	8/1/17
MARYMO	16435	MARYMONT AVE	W END	CAMBRIDGE AVE	E	4	AC	2	110	32	3,520	11/24/20	100	0	0	100	New Construction - Initial	1/1/80
PRNTNW	18130	PRINCETON CIR WEST	PRINCETON AVE	PRINCETON AVE	E	3	AC	2	1,430	26	37,180	5/8/25	100	0	100	0	New Construction - Initial	1/1/80
BURNTR	11000	BURNING TREE RD	FRANKLIN HILLS DR	MALVERN AVE	E	8	AC	2	650	40	26,000	3/26/25	100	0	100	0	Surface Treatment - REAS	8/4/23
DRAKE	12540	DRAKE AVE	UNION AVE	END	E	2	AC	2	1,336	32	42,752	12/20/21	100	0	0	0	Complete Reconstruction - AC	5/25/20
SHERWD	19480	SHERWOOD AVE	DEERPARK DR	EASTERN CITY LIMIT	E	4	AC	2	930	32	29,760	6/5/26	100	0	0	0	Surface Treatment - REAS	8/28/25
REDWOD	18440	REDWOOD CIR	ROSALIA DR	END	E	5	AC	2	175	32	5,600	6/5/26	100	0	0	0	Surface Treatment - REAS	8/28/25
LRKELN	15440	LARK ELLEN DR	STATE COLLEGE BLVD	HEATHER DR	E	5	AC	2	140	57	7,550	6/5/26	100	0	0	0	Surface Treatment - REAS	8/30/25
CAMILO	11300	CAMINO LOMA	ROSECRANS AVE	END	E	8	AC	2	155	32	4,960	4/3/26	100	0	0	0	Complete Reconstruction - AC	4/3/26
PASDOR	17725	PASEO DORADO	CAMINO LA VISTA	EUCLID AVE	E	8	AC	2	1,515	32	48,480	4/3/26	100	0	0	0	Complete Reconstruction - AC	4/3/26
BAKER	10460	BAKER AVE	LOMBARD DR	RICHMAN AVE	E	2	AAC	2	557	32	17,824	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
BAKER	10465	BAKER AVE	RICHMAN AVE	HIGHLAND AVE	E	2	AAC	2	1,300	32	41,600	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
BEECHW	10680	BEECHWOOD AVE	FIRETHORNE AVE	LANTANA AVE	E	6	AAC	2	700	32	22,400	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
BONITA	10830	BONITA PL	PALM ST	IMPERIAL BL	E	6	AAC	2	2,137	36	76,932	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
BOXWOD	10840	BOXWOOD AVE	FIRETHORNE AVE	END	E	6	AAC	2	831	32	26,592	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
FIRETHN	13220	FIRETHORNE AVE	BOXWOOD AVE	OAKWOOD AVE	E	6	AAC	2	900	32	28,800	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
LANTAN	15395	LANTANA AVE	ROLLING HILLS DR	BOXWOOD AVE	E	6	AAC	2	245	32	7,840	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
LANTAN	15400	LANTANA AVE	BEECHWOOD AVE	OAKWOOD AVE	E	6	AAC	2	650	32	20,800	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
LOUISE	16060	LOUISE PL	WANDA DR	PACIFIC DR	E	7	AAC	2	415	26	10,790	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
OAKWOD	17320	OAKWOOD AVE	FIRETHORNE AVE	LANTANA AVE	E	6	AAC	2	490	32	15,680	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
PACFIC	17580	PACIFIC DR	WALNUT AVE	VALENCIA DR	E	7	AAC	2	520	32	16,640	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
PUENTE	18260	PUENTE ST	ROLLING HILLS DR	BASTANCHURY RD	E	6	AAC	2	1,245	37	46,065	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
ROLLHL	18720	ROLLING HILLS DR	END	BREA BLVD	E	6	AAC	3	1,995	60	119,700	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
SANDLW	19090	SANDALWOOD AVE	PUENTE ST	LANTANA AVE	E	6	AAC	2	800	32	25,600	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
WALNTA	20920	WALNUT AVE	END	PACIFIC DR	E	7	AAC	2	570	32	18,240	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
WANDA	21040	WANDA DR	WALNUT AVE	VALENCIA DR	E	7	AAC	2	475	32	15,200	3/31/26	100	0	0	0	Overlay - AC Structural	3/31/26
SNTFEA	19250	SANTA FE AVE	END	RAYMOND AVE	E	3	AC	2	530	26	15,030	12/28/25	100	0	0	0	Complete Reconstruction - AC	12/28/25
SUDENE	19816	SUDENE AVE	END	RAYMOND AVE	E	3	AC	2	505	26	13,130	12/28/25	100	0	0	0	Complete Reconstruction - AC	12/28/25
DELRIO	12330	DEL RIO WAY	END	CERRITOS DR	E	7	AAC	2	190	32	6,080	10/28/25	100	0	0	0	Overlay - AC Structural	10/28/25
SNTROS	19320	SANTA ROSA PL	LAKESIDE DR	S END	E	6	AAC	2	578	28	16,184	10/28/25	100	0	0	0	Overlay - AC Structural	10/28/25
RIVRSD	18610	RIVERSIDE DR	DOROTHY LN	LINDENDALE AVE	E	3	AAC	2	630	36	22,680	9/28/25	100	0	0	0	Overlay - AC Structural	9/28/25
ACACIA	5030	ACACIA AVE	DOROTHY LN	VICTORIA DR	E	4	AAC	2	640	36	23,040	8/30/25	100	0	0	0	Overlay - AC Structural	8/30/25
ACACIA	5020	ACACIA AVE	MELODY LN	DOROTHY LN	E	5	AAC	2	530	36	19,080	8/28/25	100	0	0	0	Overlay - AC Structural	8/28/25
DORTHL	12515	DOROTHY LN	FERNDALE AVE	ACACIA AVE	E	5	AAC	2	951	36	31,680	8/28/25	100	0	0	0	Overlay - AC Structural	8/28/25
SUDENE	19820	SUDENE AVE	RAYMOND AVE	JANET PL	E	3	AC	2	1,025	32	32,800	5/14/25	100	0	0	0	Surface Treatment - Slurry Seal	6/8/24
AMERIG	8020	AMERIGE AVE	HARBOR BLVD	POMONA AVE	E	3	AAC	2	600	36	21,600	5/5/25	100	0	0	0	Overlay - AC Structural	5/5/25
CROWN	12130	CROWN WAY	SUNNY RIDGE DR	END	E	8	AAC	2	720	32	23,040	5/5/25	100	0	0	0	Overlay - AC Structural	5/5/25
EMYRAN	12970	EMERY RANCH RD	WISTERIA LN	ROSECRANS AVE	E	8	AAC	2	440	36	15,840	5/5/25	100	0	0	0	Overlay - AC Structural	5/5/25
GILBES	13530	GILBERT ST	COMMONWEALTH AVE	VALENCIA DR	E	7	AAC	2	1,247	32	39,904	5/5/25	100	0	0	0	Overlay - AC Structural	5/5/25
HOLYDL	14590	HOLLYDALE DR	MIRARMAR DR	MELODY LN	E	5	AAC	2	1,090	32	34,880	5/5/25	100	0	0	0	Overlay - AC Structural	5/5/25
HOLYDL	14600	HOLLYDALE DR	MELODY LN	DOROTHY LN	E	5	AAC	2	560	32	17,920	5/5/25	100	0	0	0	Overlay - AC Structural	5/5/25
MELODY	16565	MELODY LN	NORMAN PL	HOLLYDALE DR	E	5	AAC	2	294	32	15,680	5/5/25	100	0	0	0	Overlay - AC Structural	5/5/25
NORMNP	17150	NORMAN PL	END	MELODY LN	E	5	AAC	2	260	32	8,320	5/5/25	100	0	0	0	Overlay - AC Structural	5/5/25
REGNCY	18450	REGENCY CIR	SUNNY RIDGE DR	END	E	8	AAC	2	180	32	5,760	5/5/25	100	0	0	0	Overlay - AC Structural	5/5/25
TIFFNY	20230	TIFFANY PL	SUNNY RIDGE DR	END	E	8	AAC	2	570	32	18,240	5/5/25	100	0	0	0	Overlay - AC Structural	5/5/25
STEPNS	19815	STEPHENS AVE	JOHNSON PL	MALVERN AVE	E	7	AAC	2	270	28	7,560	4/2/25	100	0	0	0	Overlay - AC Structural	3/1/24
LKVWDR	15350	LAKEVIEW DR	EUCLID ST	CLARION DR	E	6	AAC	2	1,105	36	39,780	12/1/24	100	0	0	0	Overlay - AC Structural	12/1/24
LKVWDR	15355	LAKEVIEW DR	CLARION DR	HERMOSA DR	E	6	AAC	2	1,470	22	32,340	12/1/24	100	0	0	0	Overlay - AC Structural	12/1/24
LKVWDR	15360	LAKEVIEW DR	HERMOSA DR	LAS PALMAS DR	E	6	AAC	2	615	21	12,915	12/1/24	100	0	0	0	Overlay - AC Structural	12/1/24
LSPLMS	15530	LAS PALMAS DR	LAKEVIEW DR	HARBOR BL	E	6	AAC	2	1,420	25	35,500	12/1/24	100	0	0	0	Surface Reconstruction - AC	12/1/24
AVALON	10300	AVALON DR	END	MARION BLVD	E	5	AAC	2	547	32	17,504	10/29/24	100	0	0	0	Overlay - AC Structural	10/29/24
CLAIRE	11820	CLAIRE AVE	END	MARION BLVD	E	5	AAC	2	350	21	7,350	10/29/24	100	0	0	0	Overlay - AC Structural	10/29/24
ELSAAV	12950	ELSA AVE	AVALON DR	HELEN DR	E	5	AAC	2	710	32	22,720	10/29/24	100	0	0	0	Overlay - AC Structural	10/29/24
HELEND	14214	HELEN DR	PARK VIEW DR	S END	E	5	AAC	2	470	32	15,040	10/29/24	100	0	0	0	Overlay - AC Structural	10/29/24
HELEND	14218	HELEN DR	N END	MARION BL	E	5	AAC	2	680	32	21,760	10/29/24	100	0	0	0	Overlay - AC Structural	10/29/24
PARKVW	17710	PARK VIEW DR	END	MARION BLVD	E	5	AAC	2	450	32	14,400	10/29/24	100	0	0	0	Overlay - AC Structural	10/29/24
EGERER	12650	EGERER PL	LAS PALMAS DR	HERMOSA DR	E	6	AAC	2	895	32	17,920	10/5/24	100	0	0	0	Overlay - AC Structural	10/5/24
HERMSD	14250	HERMOSA DR	HARBOR BL	HIDEAWAY LN	E	6	AAC	2	880	32	28,160	10/5/24	100	0	0	0	Overlay - AC Structural	10/5/24
HERMSD	14260	HERMOSA DR	HIDEAWAY LN	TWILIGHT DR	E	6	AAC	2	1,825	32	58,400	10/5/24	100	0	0	0	Overlay - AC Structural	10/5/24
HERMSD	14270	HERMOSA DR	TWILIGHT DR	MADONNA DR	E	6	AAC	2	990	32	31,680	10/5/24	100	0	0	0	Overlay - AC Structural	10/5/24
HERMSD	14280	HERMOSA DR	MADONNA DR	PUENTE ST/ BRIARWOOD DR	E	6	AAC	2	1,160	32	37,120	10/5/24	100	0	0	0	Overlay - AC Structural	10/5/24
MADNNA	16150	MADONNA DR	LAS PALMAS DR	HERMOSA DR	E	6	AAC	2	885	32	28,320	10/5/24	100	0	0	0	Overlay - AC Structural	10/5/24
PASEOP	17750	PASEO PL	TETON DR	END	E	6	AAC	2	170	32	5,440	10/5/24	100	0	0	0	Overlay - AC Structural	10/5/24
PASEOP	17760	PASEO PL	MADONNA DR	END	E	6	AAC	2	395	32	12,640	10/5/24	100	0	0	0	Overlay - AC Structural	10/5/24
PASEOP	17770	PASEO PL	END	GREENMEADOW DR	E	6	AAC	2	180	32	5,760	10/5/24	100	0	0	0	Overlay - AC Structural	10/5/24
PUEBLO	18200	PUEBLO PL	TETON DR	END	E	6	AAC	2	170	32	5,440	10/5/24	100	0	0	0	Overlay - AC Structural	10/5/24
PUEBLO	18210	PUEBLO PL	MADONNA DR	END	E	6	AAC	2	410	32	13,120	10/5/24	100	0	0	0	Overlay - AC Structural	10/5/24
PUEBLO	18220	PUEBLO PL	END	GREENMEADOW DR	E	6	AAC	2	185	32	5,920	10/5/24	100	0	0	0	Overlay - AC Structural	10/5/24
ROSEHG	18910	ROSEHEDGE DR	LAS PALMAS DR	HERMOSA DR	E	6	AAC	2	831	32	26,592	10/5/24	100	0	0	0	Overlay - AC Structural	10/5/24
SUNYWD	19955	SUNNY WOOD DR	EL ADOBE PL	LAS PALMAS DR	E	6	AAC	2	1,830	32	58,560	10/5/24	100	0	0	0	Overlay - AC Structural	10/5/24
TETON	20165	TETON DR	LAS PALMAS DR	HERMOSA RD	E	6	AAC	2	840	32	26,880	10/5/24	100	0	0	0	Overlay - AC Structural	10/5/24
TWILGT	20390	TWILIGHT DR	LAS PALMAS DR	HERMOSA RD	E	6	AAC	2	850	32	27,200	10/5/24	100	0	0	0	Overlay - AC Structural	10/5/24
VALMES	20500	VALENCIA MESA DR	BASTANCHURY RD	CRESTVIEW DR	E	7	AAC	2	2,195	32	70,240	10/1/24	100	0	0	0	Overlay - AC Structural	10/1/24
VALMES	20510	VALENCIA MESA DR	CRESTVIEW DR	EUCLID AVE	E	7	AAC	2	850	32	27,200	10/1/24	100	0	0	0	Overlay - AC Structural	10/1/24
CLARKE	11850	CLARKE AVE	STATE COLLEGE BLVD	CHAPMAN AVE	E	4	AAC	2	1,355	32	43,360	9/15/24	100	0	0	0	Overlay - AC Structural	9/15/24
MISSON	16845	MISSION DR	COMMONWEALTH AVE	SANTA CLARA AVE	E	4	AAC	2	680	32	21,760	9/15/24	100	0	0	0	Overlay - AC Structural	9/15/24
PEARSN	17820	PEARSON AVE	SAN CARLOS AVE	DEREK DR	E	4	AAC	2	1,370	32	43,840	9/15/24	100	0	0	0	Overlay - AC Structural	9/15/24
SANCAR	19086	SAN CARLOS DR	PEARSON AVE	S END	E	4	AAC	2	725	56	40,600	9/15/24	100	0	0	0	Overlay - AC Structural	9/15/24
SNTCLA	19200	SANTA CLARA AVE	MOODY AVE	SAN CARLOS DR	E	4	AAC	2	1,305	32	41,760	9/15/24	100	0	0	0	Overlay - AC Structural	9/15/24
SNTYBL	19330	SANTA YSABEL AVE	MOODY AVE	SAN CARLOS AVE	E	4	AAC	2	1,325	32	42,400	9/15/24	100	0	0	0	Overlay - AC Structural	9/15/24
COSTA	11980	COSTA CT	END	SANTA CLARA AVE	E	4	AAC	2	220	26	5,720	9/8/24	100	0	0	0	Overlay - AC Structural	9/8/24
MOODY	16890	MOODY AVE	SANTA YSABEL AVE	SANTA CLARA AVE	E	4	AAC	2	470	32	15,040	9/8/24	100	0	0	0	Overlay - AC Structural	9/8/24
AQUILA	9030	AQUILA AVE	SANTA YSABEL AVE	SANTA CLARA AVE	E	4	AAC	2	545	32	17,440	9/1/24	100	0	0	0	Overlay - AC Structural	9/1/24
BARRIS	10580	BARRIS DR	CASA BLANCA DR	FERN DR	E	2	AC	2	1,035	28	28,980	6/1/24	100	0	0	0	Complete Reconstruction - AC	6/1/24
BASQUE	10600	BASQUE AVE	SANTA FE R.R. / END	VALENCIA DR	E	7	AAC	2	1,603	32	51,296	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
ELCAMI	12675	EL CAMINO DR	RICHMAN AVE	GLENHAVEN AVE	E	7	AAC	2	290	32	9,280	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
FERNDR	13140	FERN DR	FORD AVE	END	E	2	AAC	2	710	32	22,720	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
FORDAV	13310	FORD AVE	MALDEN AVE	GLENWOOD AVE	E	2	AAC	2	1,300	32	41,600	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
GLNHVN	13570	GLENHAVEN AVE	HIGHLAND AVE	VALLEY VIEW DR	E	7	AAC	2	1,605	32	51,360	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
GLNWOD	13620	GLENWOOD AVE	FORD AVE	MALDEN AVE	E	2	AAC	2	1,345	32	43,040	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
HIGLND	14360	HIGHLAND AVE	RICHMAN AVE	EL DORADO DR	E	7	AAC	2	735	32	23,520	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
HIGLND	14370	HIGHLAND AVE	EL DORADO DR	VALLEY VIEW DR	E	7	AAC	2	1,058	32	33,856	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
HIGLND	14375	HIGHLAND AVE	VALLEY VIEW DR	FORD AVE	E	7	AAC	2	441	32	14,112	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
HIGLND	14380	HIGHLAND AVE	GLENWOOD AVE	UNION AVE	E	2	AAC	2	425	32	13,600	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
HLLBOR	14540	HILLSBORO PL	BASTANCHURY RD	END	E	7	AAC	2	610	32	19,520	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
MALDEN	16183	MALDEN AVE	N END	FORD AVE	E	2	AAC	2	220	32	7,040	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
MALDEN	16186	MALDEN AVE	FORD AVE	S END	E	2	AAC	2	797	32	25,504	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
NORBY	17130	NORBY LN	STEPHENS AVE	END	E	7	AAC	2	510	32	16,320	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
PEPRTR	17840	PEPPERTREE LN	VALENCIA MESA DR	END	E	7	AAC	2	235	26	6,110	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
SANCAR	19083	SAN CARLOS DR	COMMONWEALTH AVE	PEARSON AVE	E	4	AAC	2	530	43	22,790	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
SHADOW	19410	SHADOW LN	N END	SHEPPARD DR	E	5	AAC	2	650	32	20,800	1/29/24	100	0	0	0	Surface Reconstruction - AC	1/29/24
SHADOW	19420	SHADOW LN	SHEPPARD DR	S END	E	5	AAC	2	530	32	16,960	1/29/24	100	0	0	0	Surface Reconstruction - AC	1/29/24
SHEPRD	19458	SHEPPARD DR	SHADOW LN	SKYLINE DR	E	5	AAC	2	195	32	6,240	1/29/24	100	0	0	0	Surface Reconstruction - AC	1/29/24
TAMRCK	20040	TAMARACK DR	END	GLENWOOD AVE	E	2	AAC	2	275	32	8,800	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
VISVER	20880	VISTA VERDE DR	HIGHLAND AVE	END	E	2	AAC	2	1,185	28	33,180	1/29/24	100	0	0	0	Overlay - AC Structural	1/29/24
BROOKD	10895	BROOKDALE PL	HARBOR BL	E END	E	3	AAC	2	380	32	12,160	12/14/23	100	0	0	0	Surface Reconstruction - AC	12/14/23
MORLAA	16920	MORELIA AVE	LAGUNA DR	PINATA PL	E	6	AAC	2	765	32	24,480	8/4/23	100	0	0	0	Overlay - AC Structural	8/4/23
PINATA	17870	PINATA PL	END	MORELIA AVE	E	6	AAC	2	230	32	7,360	8/4/23	100	0	0	0	Overlay - AC Structural	8/4/23
FIESTA	13190	FIESTA PL	END	MORELIA AVE	E	6	AAC	2	190	32	6,080	8/3/23	100	0	0	0	Overlay - AC Structural	8/3/23
OAKAVE	17230	OAK AVE	HASTING AVE	MEADE AVE	E	1	AC	2	1,000	32	32,000	4/12/23	100	0	0	0	Surface Treatment - Slurry Seal	10/1/22
HIGLND	14416	HIGHLAND AVE	BAKER AVE	END	E	2	AAC	3	600	60	36,000	3/1/23	100	0	0	0	Overlay - AC Structural	3/1/23
KNEPP	15110	KNEPP AVE	HIGHLAND AVE	MALDEN AVE	E	2	AAC	2	630	32	20,160	3/1/23	100	0	0	0	Overlay - AC Structural	3/1/23
POMONA	17995	POMONA AVE	ORANGEFAIR AVE	S END	E	3	AAC	2	660	32	21,120	3/1/23	100	0	0	0	Overlay - AC Structural	3/1/23
ROLLHL	18755	ROLLING HILLS DR	ST COLLEGE BL	E END	E	5	AAC	2	450	41	18,450	3/1/23	100	0	0	0	Overlay - AC Structural	3/1/23
RUBYDR	19010	RUBY DR	END	PLACENTIA AVE	E	4	AAC	2	480	37	17,760	3/1/23	100	0	0	0	Overlay - AC Structural	3/1/23
SOGATE	19680	SOUTHGATE AVE	MALDEN AVE	PCC	E	2	AAC	2	193	32	6,176	3/1/23	100	0	0	0	Overlay - AC Structural	3/1/23
KMBRLY	15030	KIMBERLY AVE	ACACIA AVE	STATE COLLEGE BLVD	E	4	PCC	2	2,560	32	81,920	10/1/22	100	0	0	0	Complete Reconstruction - PCC	10/1/22
BROOKD	10905	BROOKDALE PL	PRINCETON CIR EAST	LINCOLN AVE	E	3	AAC	2	505	32	16,160	8/1/22	100	0	0	0	Overlay - AC Structural	8/1/22
GLNWOD	13650	GLENWOOD AVE	YALE AVE	RAYMOND AVE	E	3	AAC	2	1,500	32	48,000	8/1/22	100	0	0	0	Overlay - AC Structural	8/1/22
NUTWOA	17190	NUTWOOD AVE	YALE AVE	RAYMOND AVE	E	3	AAC	2	1,485	32	47,520	8/1/22	100	0	0	0	Overlay - AC Structural	8/1/22
STANFD	19745	STANFORD AVE	DOROTHY LN	GLENWOOD AVE	E	3	AC	2	690	32	22,080	8/1/22	100	0	0	0	Complete Reconstruction - AC	8/1/22
UNION	20430	UNION AVE	YALE AVE	RAYMOND AVE	E	3	AAC	2	1,485	32	47,520	8/1/22	100	0	0	0	Overlay - AC Structural	8/1/22
YALEAV	21625	YALE AVE	GLENWOOD AVE	CHAPMAN AVE	E	3	AAC	2	2,004	32	64,128	8/1/22	100	0	0	0	Overlay - AC Structural	8/1/22
BENCHLEYST	22013	BENCHLEY ST	NICOLAS ST	SHEDDON ST	E		AAC	0	1,350	36	48,000	4/18/22	100	0	0	0	New Construction - Initial	4/18/22
BENCHLEYST	22014	BENCHLEY ST	SHEDDON ST	PIONEER AVE	E		AAC	0	720	36	25,920	4/18/22	100	0	0	0	New Construction - Initial	4/18/22
HETEBRINKS	22004	HETEBRINK ST	STARBUCKS ST	GOODWIN ST	E		AC	0	1,100	40	41,500	4/18/22	100	0	0	0	New Construction - Initial	4/18/22
HETEBRINKS	22005	HETEBRINK ST	GOODWIN ST	NICOLAS ST	E		AC	0	1,250	40	50,000	4/18/22	100	0	0	0	New Construction - Initial	4/18/22
HUGHESDR	22000	HUGHES DR	GILBERT ST	STARBUCKS ST	E		AC	0	710	40	28,400	4/18/22	100	0	0	0	New Construction - Initial	4/18/22
HUGHESDR	22001	HUGHES DR	STARBUCKS ST	NICHLAS ST	E		AC	0	2,250	40	88,750	4/18/22	100	0	0	0	New Construction - Initial	4/18/22
HUGHESDR	22002	HUGHES DR	NICHLAS ST	SPENCER LN	E		AC	0	1,010	40	40,400	4/18/22	100	0	0	0	New Construction - Initial	4/18/22
HUGHESDR	22003	HUGHES DR	SPENCER LN	BASTANCHURY RD	E		AC	0	1,650	40	66,000	4/18/22	100	0	0	0	New Construction - Initial	4/18/22
NICOLASST	22012	NICOLAS ST	HUGHES DR	HETEBRINK ST	E		AC	0	900	36	32,400	4/18/22	100	0	0	0	New Construction - Initial	4/18/22
NORTHAMDR	22006	NORTHAM DR	STARBUCKS ST	THATCHER ST	E		AC	0	1,100	40	44,000	4/18/22	100	0	0	0	New Construction - Initial	4/18/22
NORTHAMDR	22007	NORTHAM DR	THATCHER ST	NICOLAS WAY	E		AC	0	1,550	40	61,500	4/18/22	100	0	0	0	New Construction - Initial	4/18/22
STARBUCKST	22009	STARBUCK ST	HUGHES DR	HETEBRINK ST	E		AC	0	850	50	42,200	4/18/22	100	0	0	0	New Construction - Initial	4/18/22
STARBUCKST	22010	STARBUCK ST	HETEBRINK ST	NORTHAM DR	E		AC	0	850	50	42,200	4/18/22	100	0	0	0	New Construction - Initial	4/18/22
STARBUCKST	22011	STARBUCK ST	NORTHAM DR	PIONEER AVE	E		AC	0	600	50	30,000	4/18/22	100	0	0	0	New Construction - Initial	4/18/22
ARBOL	9050	ARBOL DR	LAS FALDAS DR	END	E	6	AAC	2	1,530	26	39,780	4/16/22	100	0	0	0	Overlay - AC Structural	4/16/22
CITRUS	11770	CITRUS AVE	OLIVE AVE	ELM AVE	E	1	AAC	2	260	32	8,320	4/16/22	100	0	0	0	Overlay - AC Structural	4/16/22
CITRUS	11771	CITRUS AVE	ELM AVE	ASH AVE	E	1	AAC	2	590	32	18,880	4/16/22	100	0	0	0	Overlay - AC Structural	4/16/22
CITRUS	11772	CITRUS AVE	ASH AVE	WEST AVE	E	1	AAC	2	320	32	10,240	4/16/22	100	0	0	0	Overlay - AC Structural	4/16/22
LAENTD	15156	LA ENTRADA PL	SAN JUAN DR	HARBOR BL	E	6	AAC	2	185	25	5,150	4/16/22	100	0	0	0	Overlay - AC Structural	4/16/22
LALOMA	15160	LA LOMA PL	END	ARBOL DR	E	6	AAC	2	235	32	7,520	4/16/22	100	0	0	0	Overlay - AC Structural	4/16/22
LSFALD	15460	LAS FALDAS DR	S END	SAN JUAN DR	E	6	AAC	2	610	26	15,860	4/16/22	100	0	0	0	Overlay - AC Structural	4/16/22
LSFALD	15470	LAS FALDAS DR	SAN JUAN DR	N END	E	6	AAC	2	1,010	32	32,320	4/16/22	100	0	0	0	Surface Reconstruction - AC	4/16/22
MORLAA	50007	MORELIA AVE	PINATA PL	BASTANCHURY RD	E		AAC	0	400	32	12,800	4/16/22	100	0	0	0	Overlay - AC Structural	4/16/22
OLIVE	17430	OLIVE AVE	BASQUE AVE	LEE AVE	E	1	AAC	2	270	32	8,640	4/16/22	100	0	0	0	Overlay - AC Structural	4/16/22
OLIVE	17435	OLIVE AVE	LEE AVE	ORANGE AVE	E	1	AAC	2	520	32	16,640	4/16/22	100	0	0	0	Overlay - AC Structural	4/16/22
SANJUD	19120	SAN JUAN DR	LAS FALDAS DR	LA ENTRADA PL	E	6	AAC	2	390	32	12,480	4/16/22	100	0	0	0	Overlay - AC Structural	4/16/22
SANJUD	19125	SAN JUAN DR	LA ENTRADA PL	S END	E	6	AAC	2	1,264	36	45,504	4/16/22	100	0	0	0	Overlay - AC Structural	4/16/22
SANJUP	19130	SAN JUAN PL	SAN JUAN DR	END	E	6	AAC	2	262	32	8,384	4/16/22	100	0	0	0	Overlay - AC Structural	4/16/22
VALVWP	20610	VALLEY VIEW PL	VALLEY VIEW DR	END	E	7	AAC	2	469	32	18,208	4/16/22	100	0	0	0	Overlay - AC Structural	4/16/22
JACARA	14810	JACARANDA PL	END	MALDEN AVE	E	2	AAC	2	3,038	32	97,216	3/1/22	100	0	0	0	Overlay - AC Structural	3/1/22
VICTRD	20760	VICTORIA DR	DOROTHY LN	UNION AVE	E	4	AAC	2	1,836	32	58,752	2/17/22	100	0	0	0	Surface Reconstruction - AC	12/2/21
VICTRD	20770	VICTORIA DR	UNION AVE	CHAPMAN AVE	E	3	AAC	2	2,080	32	66,560	2/17/22	100	0	0	0	Surface Reconstruction - AC	12/2/21
GOLDEN	13680	GOLDEN AVE	UNION AVE	MALVERN AVE	E	2	AC	2	860	32	27,520	12/20/21	100	0	0	0	Complete Reconstruction - AC	5/25/20
MALVEA	16223	MALVERN AVE	DRAKE AVE	RICHMAN AVE	E	2	AC	2	620	32	19,840	12/20/21	100	0	0	0	Complete Reconstruction - AC	5/25/20
UNION	20410	UNION AVE	DRAKE AVE	RICHMAN AVE	E	2	AAC	2	375	28	10,500	12/20/21	100	0	0	0	Overlay - AC Structural	12/2/21
BROOKD	10890	BROOKDALE PL	HIGHLAND AVE	HARBOR BL	E	2	AC	2	1,240	32	39,680	12/17/21	100	0	0	0	New Construction - Initial	1/1/80
ORNFRA	17480	ORANGEFAIR AVE	HOUSTON AVE	HARBOR BL	E	2	AC	2	427	32	13,664	12/16/21	100	0	0	0	New Construction - Initial	1/1/80
WILSHR	21396	WILSHIRE AVE	HARBOR BL	POMONA AVE	E	3	AC	2	175	36	6,300	12/3/21	100	0	0	0	New Construction - Initial	1/1/80
KNEPP	15115	KNEPP AVE	MALDEN AVE	HARBOR BL	E	2	PCC	2	620	33	20,460	11/29/21	100	0	0	0	New Construction - Initial	1/1/80
SOGATE	19685	SOUTHGATE AVE	AC	HARBOR BLVD	E	2	PCC	2	394	32	12,608	11/24/21	100	0	0	0	New Construction - PCC	1/1/80

BranchID	Sec ID	Name	From	To	Rank	Zone	Surface Type	Lanes	L	W	Area	Insp. Date	PCI	% Load	% Climate	% Other	Work History Type	Work Date
LAENTD	15155	LA ENTRADA PL	HARBOR BL	SAN JUAN DR	E	6	AC	2	185	25	5,175	12/23/20	100	0	0	0	New Construction - Initial	1/1/80
SPRUCE	19710	SPRUCE PL	END	EVERGREEN AVE	E	5	AC	2	375	32	12,000	12/4/20	100	0	0	0	Complete Reconstruction - AC	8/1/18
MIDLSX	16670	MIDDLESEX PL	END	CLAIRMONT ST	E	4	AAC	2	440	32	14,080	11/24/20	100	0	0	0	Overlay - AC Structural	5/25/20
SALEM	19040	SALEM PL	END	CLAIRMONT ST	E	4	AAC	2	440	32	14,080	11/24/20	100	0	0	0	Overlay - AC Structural	5/25/20
BASQUE	10592	BASQUE AVE	CHAPMAN AVE	COMMONWEALTH AVE	E	7	AC	2	1,220	32	39,040	7/1/13	100	0	0	0	Mill, Overlay w/Fabric (1.5 In)	7/1/13
HALEAV	13850	HALE AVE	ALTO LN	END	E		AC	0	1,790	32	57,280	1/1/00	100	0	0	0	New Construction - Initial	1/1/00
HALEAV	13855	HALE AVE	PIONEER AVE	END	E		AC	0	180	32	5,760	1/1/00	100	0	0	0	New Construction - Initial	1/1/00
HALEAV	13860	HALE AVE	VICTORIA DR	END	E		AC	0	380	32	12,160	1/1/00	100	0	0	0	New Construction - Initial	1/1/00
HALEAV	13870	HALE AVE	FERN DR	GLENWOOD AVE	E		AC	0	520	32	16,640	1/1/00	100	0	0	0	New Construction - Initial	1/1/00
HALEAV	13880	HALE AVE	NUTWOOD AVE	CENTRAL AVE	E		AC	0	1,040	32	33,280	1/1/00	100	0	0	0	New Construction - Initial	1/1/00
HALEAV	13900	HALE AVE	WALNUT AVE	END	E		AC	0	250	40	10,000	1/1/00	100	0	0	0	New Construction - Initial	1/1/00
BURNTR	11008	BURNING TREE RD	MOORE AVE	END	E	8	AC	2	440	32	14,080	1/1/80	100	0	0	0	New Construction - Initial	1/1/80
ORCHRD	17515	ORCHARD AVE	CHAPMAN AVE	NORTH END	E	7	AC	2	245	32	7,840	1/1/80	100	0	0	0	New Construction - Initial	1/1/80
									229.5		**39,527,764**							

XIII. APPENDIX C – GIS DIGITAL DATA

Introduction

The OCTA GIS Section maintains a spatial inventory of transportation infrastructure which mostly consists of major arterial streets, roads, and highways. A key component of road information is pavement condition. Maintaining an inventory of pavement condition will enhance OCTA's GIS visualization and analysis capabilities and assist in understanding the transportation investment needs throughout the region. Therefore, a GIS dataset in digital format should be included in this report.

Structure of GIS Data

The GIS dataset must consist of linear geographic features that represent road/street segments. All segments that are part of the report should be included in the GIS dataset. The attribute information of each segment should generally follow the format of the Complete Listing of Current Street Conditions in Appendix B above.

The GIS data requirements are discussed below. Most commercial and open-source GIS software provide industry-standard tools to manage GIS data to meet these requirements.

GIS Digital Data Format

The GIS data must be submitted in either one of the following formats:

- Esri Shapefile, or
- Esri File Geodatabase

Metadata

The GIS data are required to have associated metadata. The minimum metadata items required are:

- Title of Dataset
- Tags (A set of words that can be used by GIS to search for the resource. For example: "pavement", "transportation", "roads")
- Summary (A brief purpose statement of the dataset)
- Description (A brief narrative of the dataset's content)
- Credits (A recognition of those who created or contributed to the resource)

Spatial Geometry Type

The spatial geometry of the segment features must be lines that represent the roadway centerline as accurately as possible.

Projection

The GIS data must have spatial reference information and have its coordinate system identified and embedded in or associated with the data file(s). All GIS data submitted to OCTA should be in the following projected coordinate system:

- NAD 1983 State Plane California VI FIPS 0406 (US Feet) - More information about this system can be found at: https://spatialreference.org/ref/epsg/nad83-california-zone-6-ftus/

GIS Feature Attributes

The required segment attributes are:

- Street name
- Unique segment identifier (Segment ID from original source if available)
- Name of intersecting road at the beginning of a segment
- Name of intersecting road at the end of the segment
- Current pavement condition index (PCI)
- Current PCI inspection date
- Length of road segment in feet
- Width of road segment in feet
- Paved area of road segment in square feet or square yards
- Projected PCI at end of Seven-Year Road Maintenance and Rehabilitation Plan

Additional attributes such as number of through travel lanes, direction of travel and pavement surface type may be provided.

XIV. APPENDIX D – QUALITY ASSURANCE / QUALITY CONTROL PLAN

Introduction

When performing data collection in any field, the need for quality control is paramount as it is essential for accurate planning, analysis and design. This is particularly true for collecting pavement distress data for a pavement management program.

The Quality Assurance / Quality Control (QA/QC) Plan establishes minimum quality standards for performance and procedures for update of the pavement management program.

Objectives

This document constitutes a formal QA/QC Plan for the City of Fullerton. It was prepared on March, 2018 and last revised in April, 2026.

Specifically, it is intended for the 2026 Pavement Management Plan Update. The focus is on the collection of network-level pavement distress data (defined by National Cooperative Highway Research Program (NCHRP) Synthesis 401 Quality Management of Pavement Data Collection, as "Network-level data collection involves collection of large quantities of pavement condition data, which is often converted to individual condition indices or aggregated into composite condition indices".

This document also addresses the QA/QC plan requirements of the Orange County Transportation Authority (OCTA)'s "Countywide Pavement Management Plan Guidelines" (Section 2.4), adopted in May 2010.



Structure of QA/QC Plan

The following components are addressed in this QA/QC Plan:

- Condition survey procedures used;
- Accuracy required for data collection;
- Inspector qualifications and experience; and
- Safety.

Condition Survey Procedures

The governing document in performing condition surveys for the City of Fullerton is ASTM D6433-16 "Standard Practice for Roads and Parking Lots Pavement Condition Index (PCI) Surveys." Both asphalt concrete (AC) and Portland cement concrete (PCC) pavements are included in this protocol. The following distresses are collected for each pavement type:

Asphalt Concrete	Portland Cement Concrete (Jointed)
1. Alligator (fatigue) cracking	1. Blow-up/Buckling
2. Bleeding	2. Corner Breaks
3. Block Cracking	3. Divided Slab
4. Bumps and sags	4. Durability ("D") Cracking
5. Corrugation	5. Faulting
6. Depression	6. Joint Seal damage
7. Edge Cracking	7. Lane/Shoulder Drop-off
8. Joint Reflection Cracking	8. Linear Cracking
9. Lane/Shoulder Drop-off	9. Patching (large) and Utility Cuts
10. Longitudinal & Transverse Cracking	10. Patching (small)
11. Patching and Utility Cut Patching	11. Polished Aggregate
12. Polished aggregate	12. Popouts
13. Potholes	13. Pumping
14. Railroad Crossing	14. Punchout
15. Rutting	15. Railroad Crossing
16. Shoving	16. Scaling, map cracking and crazing
17. Slippage Cracking	17. Shrinkage Cracks
18. Swell	18. Spalling (corner)
19. Weathering	19. Spalling (joint)
20. Raveling	

As required by the Orange County Transportation Authority (OCTA), the City of Fullerton must prepare and implement a quality assurance / quality control (QA/QC) plan regarding pavement management inspection as they pertain to MicroPAVER. For the purposes of this report, Bucknam has demonstrated below how our project team implemented QA/QC procedures during the project.

Our QA/QC plan focuses on the how each pavement inspection is performed, what distresses are collected and ensures that it complies with the OCTA guidelines defined within the "Countywide Pavement Management Plan Guidelines (CPMPG)".



As shown within the OCTA (CPMPG), our staff followed and delivered on the requirements stated within Chapter 2, page 2-5 which require specific QA/QC data (Items A through G). Additionally, Chapter 3 requires numerous data/deliverables from local agencies for OC Go eligibility. All general PCI budgetary report submittals will follow the Chapter 3 guidelines. In conjunction with the outlined items within the CPMPG Section 2 we have summarized our QA/QC procedures below:

a. **Descriptions of condition survey** - Our staff follows the required Condition Survey Protocols (CPMPG, Chapter 2); our staff assesses each pavement section for the minimum distresses outlined within Chapter 2, page 2-1. Additionally, based on the pavement conditions found, we collect all MicroPAVER/StreetSaver Army Corps of Engineers (USACE) distresses, if found within the sample sections; for example, if slippage cracking, potholes, etc. are found our survey technicians record the proper information.

b. **How data was collected** - Our surveys follow the OCTA accepted walking requirements. All sections that our staff surveys are performed through the walking method, approximately 10% of all sections surveyed were complemented with windshield surveys based on unique conditions found. Our staff physically measures the width of every section as well as measure for any square footage adjustment that need to be added or taken away from a sections "true area" (i.e. cul-de-sac, bus pads, street width variances, etc.). Samples taken always include a minimum of 2,500 SF coverage unless specific section limits prohibit this. Arterial section samples utilize a 3,500 SF sample size due to the larger section area (this is within the ASTM D6433-16 sample size calculation. Field crews typically include one individual for residential pavement sections while Arterial (MPAH) routes utilize a two-person crew for safety, traffic control and increases quality control.

c. **Accuracy required for data collection** - We use a statistical sampling approach for measuring the quality of our field technician's work. In this manner, 10 percent of the original surveys are re-surveyed by a different survey crew than the original, supervised by a field supervisor, and the results are compared to the original surveys. Our QC process involves checking the field crews' work in a "blind study" fashion. Quality control checks are performed at the end of each survey week. This ensures that all field personnel are properly collecting section samples, distress types and distress severities for all street segments.

    - ❖ When QA/QC issues are found, our staff documents the issues within MicroPAVER's user interface. If distress types found are not within the 97% accuracy our QA/QC is expanded beyond our minimum 10% resurvey to 20% of the original survey

d. **Random and Systematic Re-Inspections** – As described above our staff re-inspects, as a minimum, 10% of the original survey (OCTA only requires 5%). Per the agencies requests, our staff will submit PCI reports to the agency as project status reports for their review. Agencies will typically review specific pavement sections for PCI accuracy based on recent overlay or slurry seal maintenance; this serves as an initial accuracy check on our surveys (outside Bucknam QC efforts). Additionally, our staff performs "ride-a-long" surveys with local agency staff to build consensus on how our MicroPAVER/StreetSaver USACE surveys are performed, recorded and reported on.

    Random re-inspections will include a representative selection across the following categories:

    - Functional classed (i.e. MPAH, locals);



- Surface types (e.g. AC or PCC);
- Pavement conditions (e.g. good, fair, poor);
- Inspectors;
- Geographical areas, if applicable.

For systematic re-inspections, this could be due to noticed trends such as specific treatment types (e.g. open-graded mixed), a specific inspector or geographical area. In these cases Bucknam continues to utilize a 10% re-inspection policy.

e. **PCI Comparison with Past Surveys** - if previous inspection data is available, new PCI's calculated through the most recent inspections will be compared to previous PCI's. If the variance in PCI is greater than +/- 10 PCI points, these sections will be flagged for further investigation and/or re-inspection (In the cases that a PCI increases or decreases by 10 points follows the established CPMPG guidelines; Appendix A, page A-18).

f. **Schedule of data submittal** – Pending on the City's last major PMP submittal, Bucknam will assist the agency in submitting the following:

- ❖ Master Plan of Arterial Highways (MPAH) routes will be surveyed and reported on at least once every two years
- ❖ Local streets will be surveyed and reported on every six years
- ❖ Corresponding MPAH and local PCI reporting and budgetary reporting will be submitted every two years

g. **Inspector's Qualifications and Experience** – Bucknam staff have been trained on the use of StreetSaver and the segment calibration/verification and inspection practices. Mr. Peter Bucknam (Project Manager) has completed the MicroPAVER Certification of Professional Development courses. All Bucknam field technicians are trained using the ASTM D6433 survey methodologies and have passed OCTA's prequalification testing every year since 2010. Bucknam Infrastructure Group inspectors have attended formal training on pavement condition distress surveys. This training was conducted prior to performing any work using the ASTM D6433 protocols, consistent with OCTA's requirements.

Inspector Name	Role (Field Inspector or QA/QC Reviewer or Both)	Date of ASTM D6433 Training	Training Conducted By:	OCTA Pre-Qualification		
				Active (Y/N	Expiration Date	Certificate Provided with this Report (Y/N)
Cade Bucknam	Both	June, 2025	Bucknam - Internal	Y	6/30/27	Y
Chris Campbell	Field Inspector	February, 2026	Bucknam - Internal	Y	6/30/28	Y
Aaron Cohodas	Both	July, 2024	Bucknam - Internal	Y	7/30/26	Y
Avery Brinkley	Field Inspector	June, 2025	Bucknam - Internal	Y	6/30/27	Y


Attachments – Inspectors Certifications

- Certificate of Prequalification – OCTA Pavement Inspector Prequalification Program (see below):







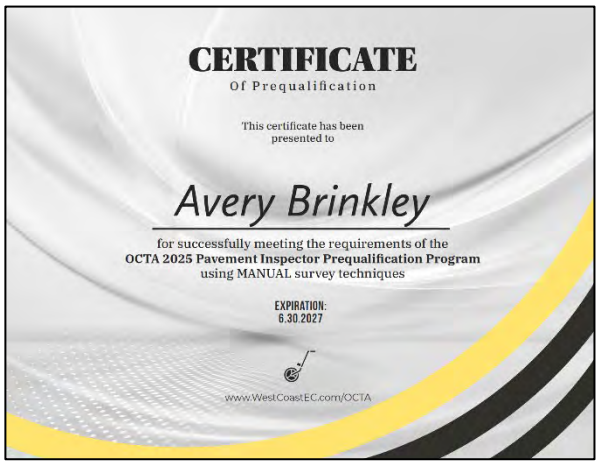

h. **Safety procedures** – Bucknam field survey techniques utilize the following procedures:

a. All vehicles are properly marked or flagged with appropriate sign markings indicating that a “PAVEMENT SURVEY IS IN PROGRESS”

b. All vehicles have the proper flashing amber light beacons placed on the top of the vehicle to allow for proper visibility and line-of-site warning

c. Large MPAH routes are surveyed using two field technicians to increase traffic control warning and safety

d. While parking or stopping along the survey route, vehicles legally park within the right-of-way or use a parking lot

e. All field technicians wear ANSI – 105 Class II safety vests

XV. APPENDIX E – PAVEMENT MANAGEMENT DATA FILES

The City of Fullerton MicroPAVER database (.e70 file) has been enclosed for City and OCTA use. This data and the associated reporting data includes:

- Street names and limits for the City's public streets
- Street identifiers (Branch ID, Section ID)
- Direction (if applicable)
- Beginning and ending of each section
- Length, width and true areas
- Functional Classification (MPAH, Local)
- Number of travel lanes
- Pavement Condition Index (PCI) and date of inspection
- Type of recommended treatment
- Cost of recommended treatment
- Street geometry as linear of polygon features

XVI. APPENDIX F – GIS MAPS / CURRENT

